



ATLANTIC
Fluid Tech



OIL SOLUTIONS

PO Box 38
Strathfieldsaye, VIC, 3551
1800 OIL SOL
1800 645 765

sales@oilsolutions.com.au

www.oilsolutions.com.au

"For All Your Hydraulic Needs"

SECTION
19

Directional
Valves

SECTION 19

DIRECTIONAL VALVES



Hydraulic scheme	Valve description	Valve type	Rated flow (l/min)	Max. pressure (bar)	Page
	EBN	On-off or proportional	30/60	210/320	19.10.000
	EBL	Load sensing, on-off or proportional	30/60	210/320	19.20.000
	EBP	Precompensated, load sensing, on-off or proportional	30/60	210/320	19.30.000
	Accessories	-	-	-	19.90.000




1800-OILSOL
1800-645765

<https://oilsolutions.com.au/>

sales@oilsolutions.com.au

EBN series

MONOBLOCK DIRECTIONAL VALVE ON-OFF OR PROPORTIONAL

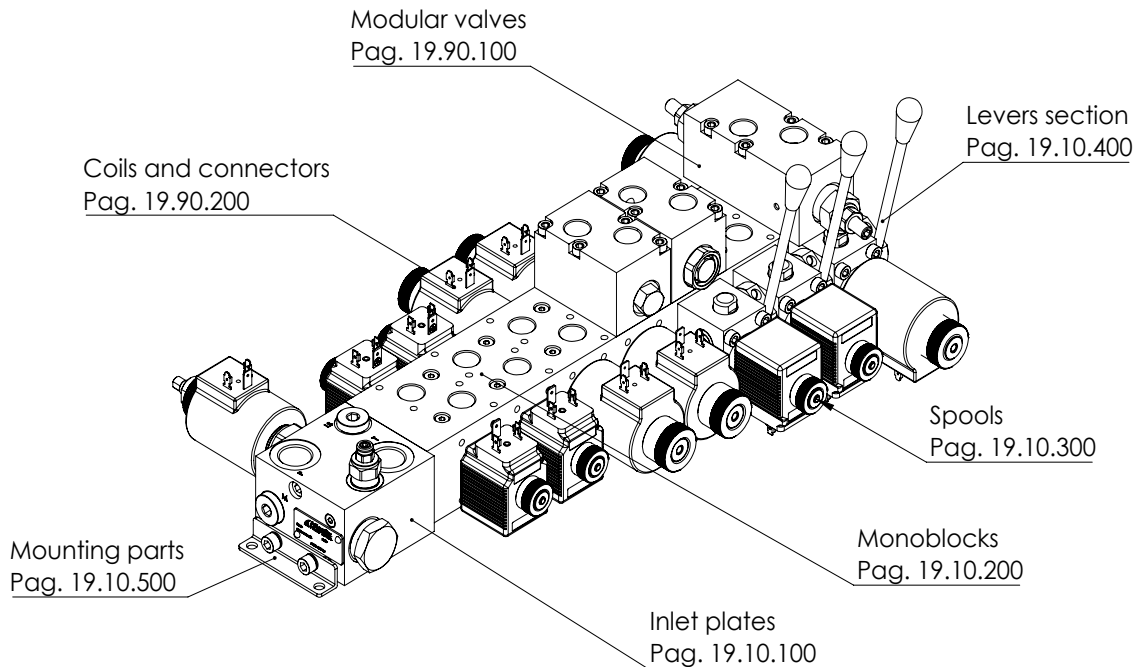

FEATURES

- Compact dimensions
- Low weight
- Custom spools
- Custom inlet blocks
- Sandwich valves for extra functions
- Cast iron monoblock and aluminum inlet block for standard applications
- High resistance cast iron monoblock and steel inlet block for high pressure systems
- Optional levers for manual operation
- No leak risk between sections
- Spools not under rod tension
- Zinc plated/anodized components for corrosion resistance

SPECIFICATION \ DESCRIPTION

MAXIMUM OPERATING PRESSURE	Steel inlet block: 320 bar (4500 PSI) Aluminium inlet block: 210 bar (3045 PSI)
MAXIMUM TANK PRESSURE	20 bar (290 PSI)
RATED FLOW	030 series: 30 l/min (7.9 GPM) 060 series: 60l/min (15.8 GPM)
COIL POWER	030 series: 26 W 060 series: 33 W
VOLTAGE	12 VDC, 24 VDC, others on request
COIL CONNECTOR	DIN43650, AMP Junior, Deutsch DT04-2P
PORTS	Inlet: G1/2", 1/2 JIS, 7/8-14 UNF-2B (SAE#10) Outlet: G3/8", 3/8 JIS, 3/4-16 UNF-2B (SAE#8)
OPERATING TEMPERATURE	NBR (ISO 1629) seals: -30, + 80 °C FKM (ISO 1629) seals: -20, +110 °C
FILTRATION	ISO 4406:1999: class 19/17/14 NAS 1638: class 8
MOUNTING POSITION	No restrictions
MATERIAL	Spool body: cast iron Spool: hardened and grounded steel Inlet block: Aluminium or steel
SURFACE TREATMENT	Steel: zinc plating Aluminium: anodization

EBN series is a new directional valve that has innovative features in terms of performance, dimension, manufacturing reliability and customization. The valve consists in an inlet block flanged to a monoblock with spools. This construction gives the advantages of high flexibility in inlet block schemes, combined with the reliability and simplicity of monoblock spool valve construction, eliminating the risk of spools blocking due to overtightening of tie rods or the risk of leakage between sections. The spool monoblock is a 2 or 3 position, 4 ways, direct acting solenoid operated type. All sections have threaded ports at the top and removable plugs for tank connections to allow the installation of flanged blocks with additional functions like crossover reliefs, reliefs to tank, relief and anticavitations, counterbalance valves, P.O. checks, flow restrictors and flow regulators. All sections are equipped with standard push button override and they can be equipped with lever for manual use.

HOW ORDER IT

To order an assembled block, contact AFT sales network specifying the part numbers following page 19.90.900 path.

For special versions please contact AFT sales network.

To order the separate parts please refer to each catalogue page.



1800-OILSOL
1800-645765


<https://oilsolutions.com.au/>

sales@oilsolutions.com.au


EBN series - INLET SECTION

SFNL-060-ZNNN-01

**P, T PORTS
M PORTS**

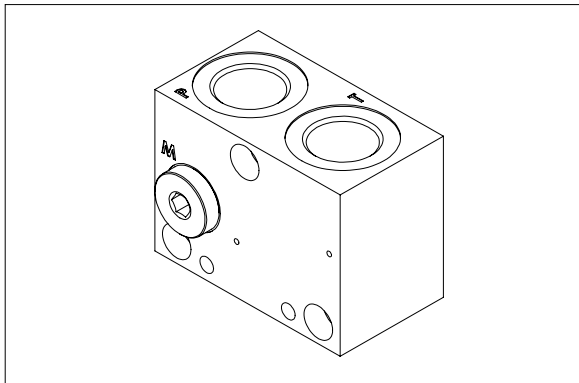

HYDRAULIC SCHEME

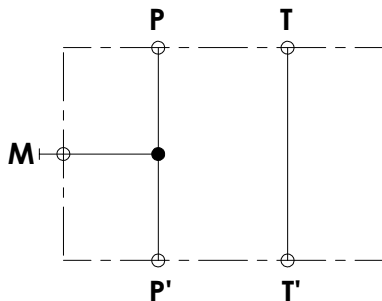


This inlet section is equipped with two thread ports (P, T) available in two different types G 1/2" or 3/4"-16 UNF plus a third threaded port M for pressure measuring available in G 1/4" or 7/16"-20. The manifold material is aluminium for applications up to 210 bar or zinc plated steel for applications up to 320 bar.

TECHNICAL DATA

Max pressure	210/320 bar
Rated flow	60 l/min
Hydraulic fluid	Mineral oil DIN 51 524
Fluid viscosity	10-500 mm ² /s
Fluid temperature	-25°C/75°C
Environment temperature	-25°C/60°C
Weight	0,3 Kg

PRESSURE DROP

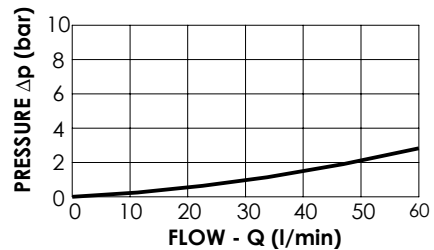

ORDERING DETAILS: SEPARATE ELEMENTS


SFNL-060 - *NNN-01-*-N**

*	MATERIAL TYPE
A	Steel zinc-plated (320 bar)
Z	Aluminium anodized (210 bar)

***	PORTS		
	P line	T line	M
G12	G 1/2"	G 1/2"	G 1/4"
U34	3/4"-16 UNF	3/4"-16 UNF	7/16"-20 UNF

QUICK CODE	
DESCRIPTION	CODE
SFNL-060-ZNNN-01-G12-N	SF000004

OVERALL DIMENSIONS

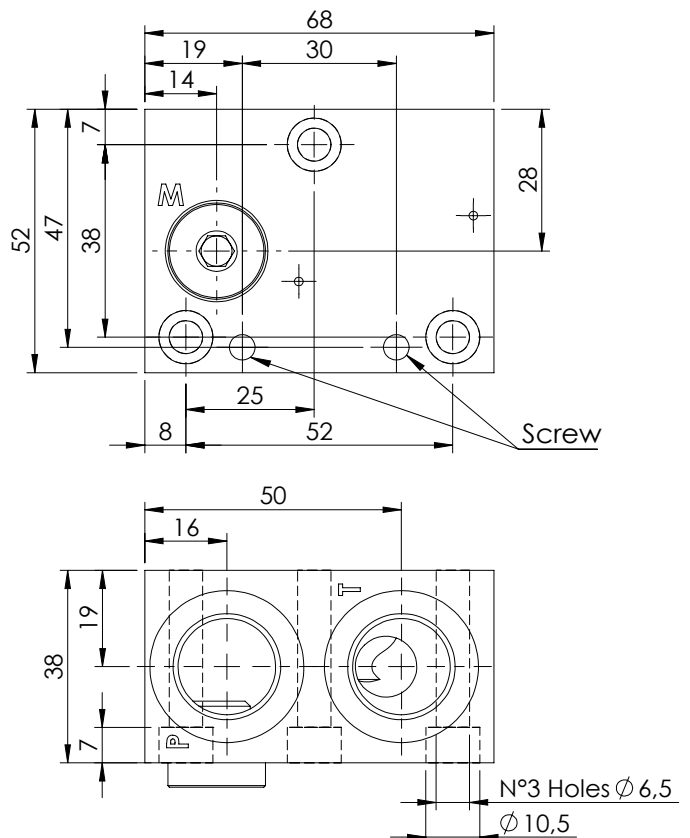


EBN series - INLET SECTION




SFNL-060-ZNNN-02

CHECK VALVE OPTIONS

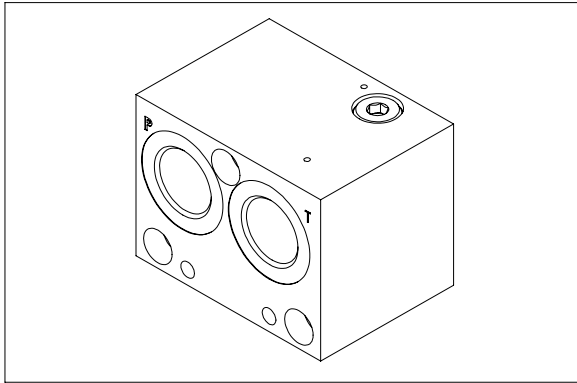

HYDRAULIC SCHEME

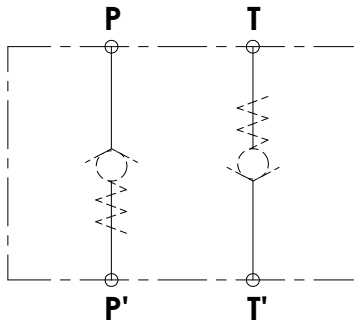


This inlet section is equipped with threaded ports (P, T) available in two different sizes G 1/2" or 3/4"-16 UNF, M ports is not available in this inlet section. The ports have extra threads to allow the installation of check valve on P and T ports. The manifold material is aluminium for applications up to 210 bar or zinc plated steel for applications up to 320 bar.

TECHNICAL DATA

Max pressure	210/320 bar
Rated flow	60 l/min
Hydraulic fluid	Mineral oil DIN 51524
Fluid viscosity	10-500 mm ² /s
Fluid temperature	-25°C/75°C
Environment temperature	-25°C/60°C
Weight	0,4 Kg

PRESSURE DROP

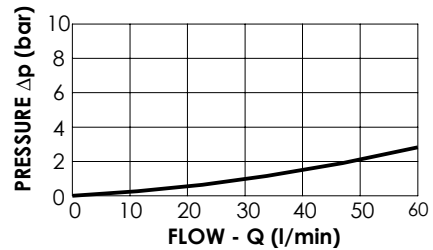

ORDERING DETAILS: SEPARATE ELEMENTS

SFNL-060- * NN * -02- * -N**


*	MATERIAL TYPE
A	Steel zinc-plated (320 bar)
Z	Aluminium anodized (210 bar)

*	CHECK VALVE OPTION
N	No check valve
D	Check valve on P e T ports
P	Check valve only P port
T	Check valve only T port

***	PORTS		
	P line	T line	M
G12	G 1/2"	G 1/2"	/
U34	3/4"-16 UNF	3/4"-16 UNF	/

QUICK CODE	
DESCRIPTION	CODE
SFNL-060-ZNNN-02-G12-N	SF000008
Check valve on P	CD000181
Check valve on T	CD000175

OVERALL DIMENSIONS

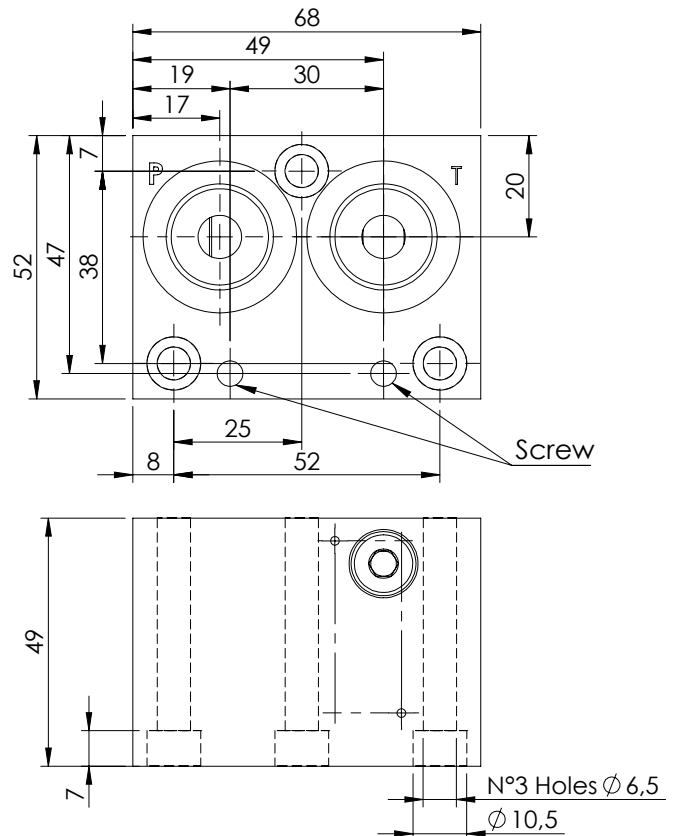


EBN series - INLET SECTION




SFNL-060-ZNNN-03

RELIEF VALVE M PORT

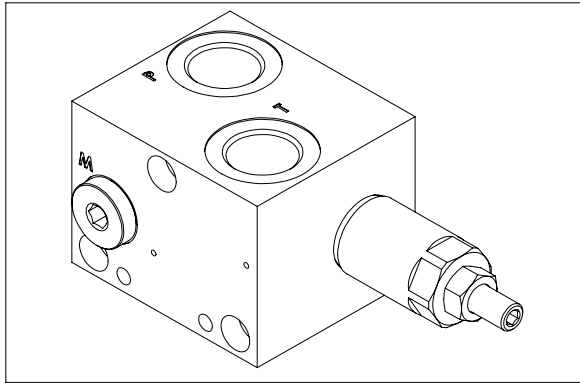

HYDRAULIC SCHEME

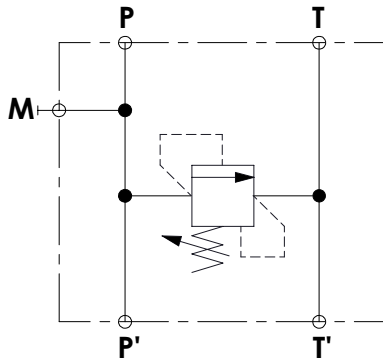


This inlet section is equipped with threaded ports (P, T) available in two different sizes G 1/2" or 3/4"-16 UNF, an M port is available in sizes G 1/4" or 9/16-18 UNF. It is also present a with relief valve with adjustable setting, the adjustment is made by socket screw; the max flow on the relief valve is 30 l/min. The manifold material is aluminium for applications up to 210 bar or zinc plated steel for applications up to 320 bar.

TECHNICAL DATA

Max pressure	210/320 bar
Rated flow	60 l/min
Hydraulic fluid	Mineral oil DIN 51524
Fluid viscosity	10-500 mm ² /s
Fluid temperature	-25°C/75°C
Environment temperature	-25°C/60°C
Weight	0,6 Kg

PRESSURE DROP

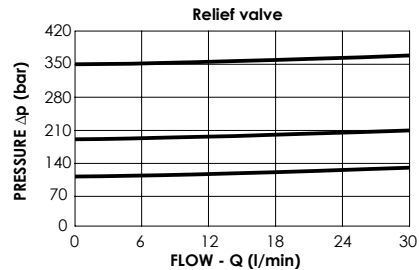

ORDERING DETAILS: SEPARATE ELEMENTS

SFNL-060-[*N*]-03-***-N

*	MATERIAL TYPE
A	Steel zinc-plated (320 bar)
Z	Aluminium anodized (210 bar)



*	SETTING RANGE
N	Max setting 210 bar (CP000083)
A	Max setting 110 bar (CP000084)
B	Max setting 350 bar (CP000082)

*	ADJUSTMENT OPTION
N	Screw adjustment
V	Knob adjustment

***	PORTS		
	P line	T line	M
G12	G 1/2"	G 1/2"	G 1/4"
U34	3/4"-16 UNF	3/4"-16 UNF	7/16"-20 UNF

QUICK CODE	
DESCRIPTION	CODE
SFNL-060-ZNNN-03-G12-N	SF000003

OVERALL DIMENSIONS

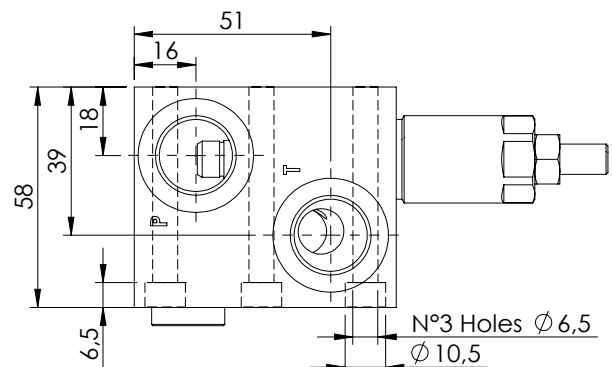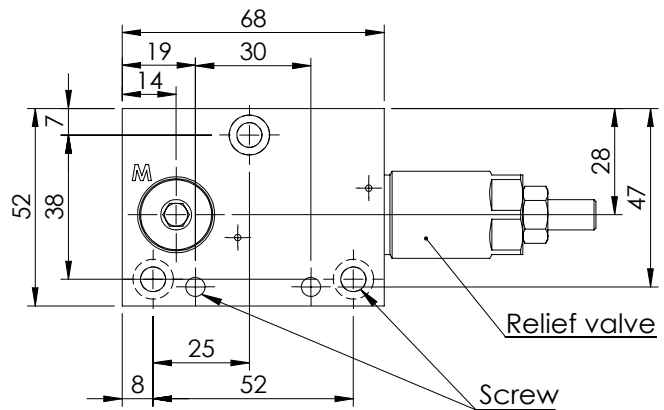


EBN series - INLET SECTION




SFNL-060-ZNNN-05

**RELIEF VALVE
UNLOADING VALVE**

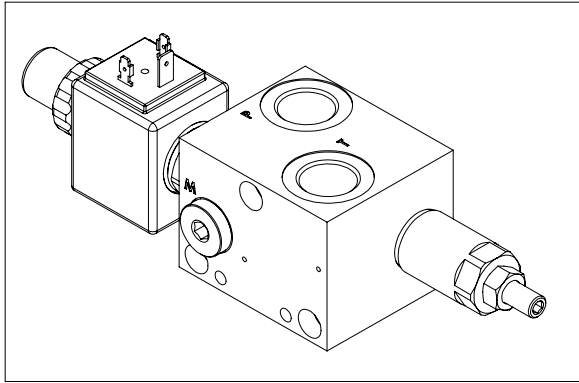

HYDRAULIC SCHEME

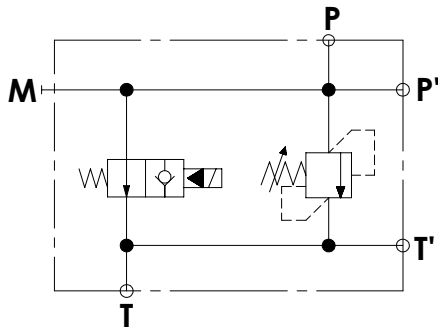


This inlet section is equipped with threaded ports (P, T) available in two different sizes G 1/2" or 3/4"-16 UNF, an M ports is available in sizes G 1/4" or 9/16-18 UNF. A with relief valve with adjustable setting protect from peak pressure; the max flow on the relief valve is 30 l/min. A solenoid valve normally open allow to unload the system and is equipped with manual override, max flow on the solenoid valve is 40 l/min. The manifold material is aluminium for applications up to 210 bar or zinc plated steel for applications up to 320 bar.

TECHNICAL DATA

Max pressure	210/320 bar
Rated flow	60 l/min
Hydraulic fluid	Mineral oil DIN 51524
Fluid viscosity	10-500 mm ² /s
Fluid temperature	-25°C/75°C
Environment temperature	-25°C/60°C
Weight	0,75 Kg

PRESSURE DROP

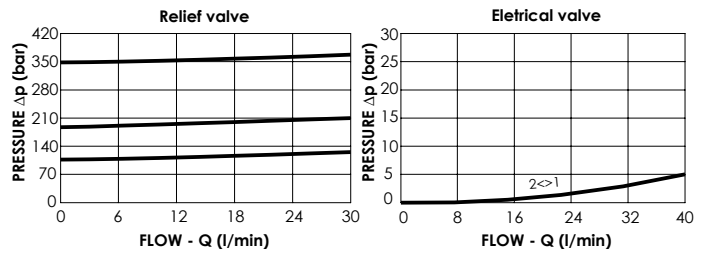


ORDERING DETAILS: SEPARATE ELEMENTS

SFNL-060- *N* * - 05- *- * **N**

*	MATERIAL TYPE		
A	Steel zinc-plated (310 bar)		
Z	Aluminium anodized (210 bar)		
*	SETTING RANGE		
N	Max setting 210 bar (CP000083)		
A	Max setting 110 bar (CP000084)		
B	Max setting 350 bar (CP000082)		
*	ADJUSTMENT OPTION		
N	Screw adjustment		
V	Knob adjustment		
***	PORTS		
	P line	T line	M
G12	G 1/2"	G 1/2"	G 1/4"
U34	3/4"-16 UNF	3/4"-16 UNF	7/16"-20 UNF
*	VOLTAGE		
	no coils		
A	12 V dc		
B	24 V dc		
**	COILS TYPE		
	no coils		
HR	Hirschmann (ISO 4400 DIN 43650)		
DT	Deutsch (DT04-2P)		
AJ	Amp junior (AJ type)		
	QUICK CODE		
	DESCRIPTION	CODE	
	SFNL-060-ZNNN-05-G12-N	SF000002	
	Unloading valve	CE000868	


OVERALL DIMENSIONS

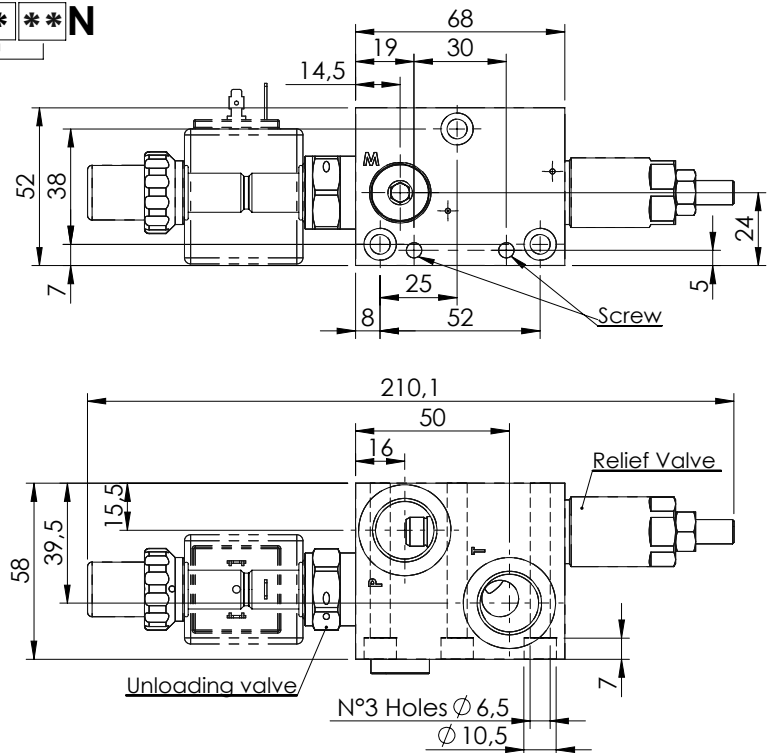


EBN series - INLET SECTION

SFNL-060-ZDNN-07

PROPORTIONAL COMPENSATED FLOW REGULATOR

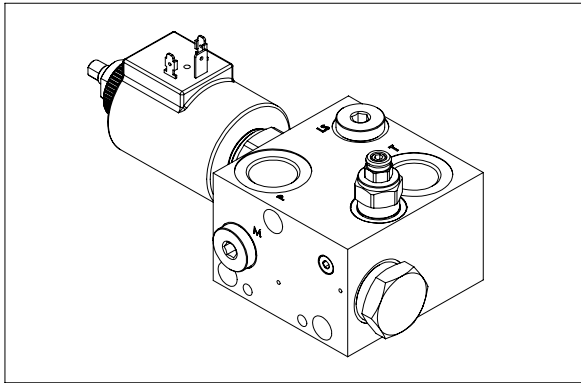

HYDRAULIC SCHEME

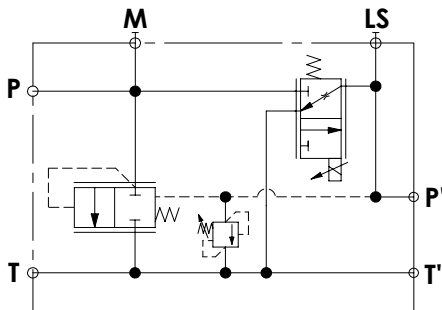


This inlet section is equipped with threaded ports (P, T) available in two different sizes G 1/2" or 3/4"-16 UNF, an M ports is available in sizes G 1/4" or 9/16-18 UNF; an LS port allows to measure of the load pressure.
 A proportional flow regulator with external flow compensator controls the metering, the maximum flow is 40 l/min; when not energized the compensator is unloading the flow.
 A relief valve with adjustable setting protect from peak of pressure.
 The manifold material is aluminium for applications up to 210 bar or zinc plated steel for applications up to 320 bar.

TECHNICAL DATA

Max pressure	210/320 bar
Rated flow	60 l/min
Hydraulic fluid	Mineral oil DIN 51524
Fluid viscosity	10-500 mm ² /s
Fluid temperature	-25°C/75°C
Environment temperature	-25°C/60°C
Weight	0,75 Kg

PROPORTIONAL FLOW REGULATOR CURVES

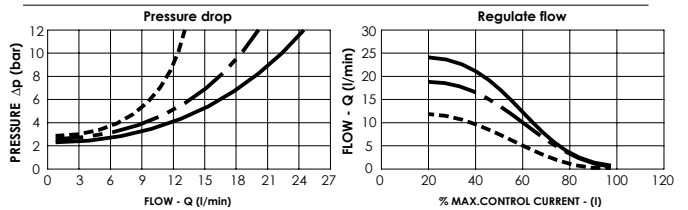


ORDERING DETAILS: SEPARATE ELEMENTS

SFNL-060-*D *-07-***-***N**

* MATERIAL TYPE	A Steel zinc-plated (320 bar)	Z Aluminium anodized (210 bar)
* RELIEF VALVE SETTING	N Max setting 210 bar (CP000029)	A Max setting 110 bar (CP000030)
	B Max setting 350 bar (CP000002)	
* ADJUSTMENT FLOW	N 30 l/min (CE000112)	A 20 l/min (CE000113)
	B 10 l/min (CE000111)	
*** PORTS	P line	T line
	G12 G 1/2"	G 1/2"
	U34 3/4"-16 UNF	7/16"-20 UNF
* VOLTAGE	no coils	A 12 V dc
		B 24 V dc
** COILS TYPE	no coils	HR Hirschmann (ISO 4400 DIN 43650)
		DT Deutsch (DT04-2P)
		AJ Amp junior (AJ type)
QUICK CODE	DESCRIPTION	CODE
	SFNL-060-ZNNN-05-G12-N	SF000001


OVERALL DIMENSIONS

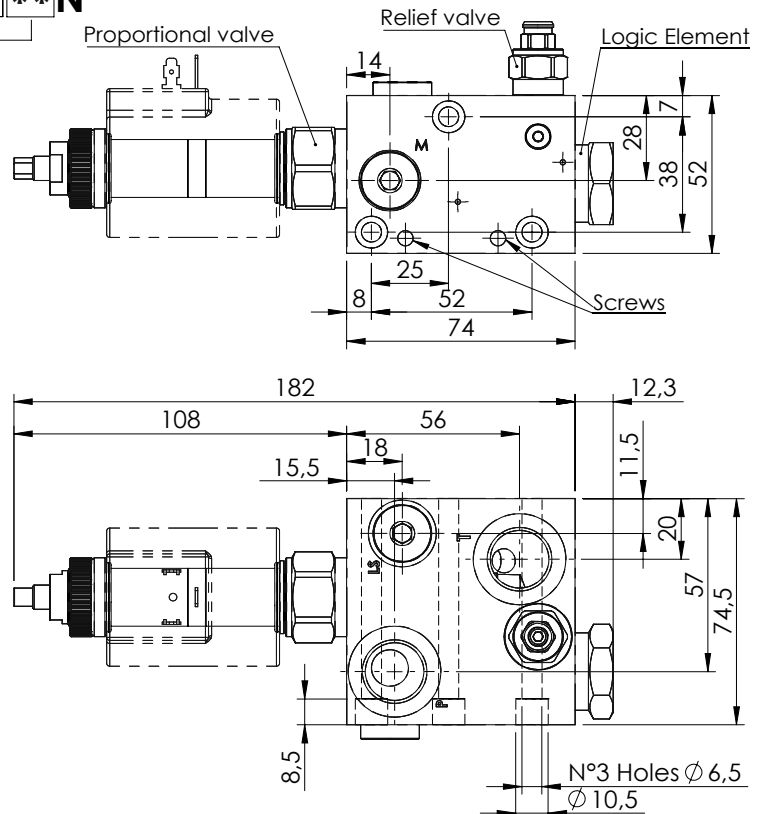

LDNP-060-NNNN

**CAST-IRON
MANIFOLD**

In LDNS/P-030-C plug are included in the manifold

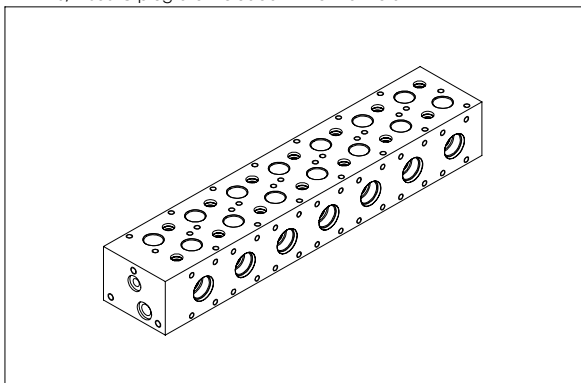

The monoblock valve can be ordered with a number of spool's section from 1 to 7, each section is equipped with side mounting holes for lever option and with treaded holes at the top for flangeable modular valve. There are also two removable plugs connecting to a T line to allow to flange special blocks.

The standard version has G 3/8" ports and can be supplied with top blocks with 9/16"-18 UNF (SAE6) or M16x1,5.

The manifold it is made with cast-iron and protected from corrosion with zinc-plating surface treatment.

The inlet face has 3 threaded holes to flange an inlet block that can be customized for each application, giving high flexibility to the project.

TECHNICAL DATA

Max pressure	320 bar
Rated flow	60 l/min
Material	Cast-iron
Surface treatment	Zinc-plated black
Weight for single section	1,6 kg
Wight for additional sections	+ 1 Kg each

ORDERING DETAILS: SEPARATE ELEMENTS

LDN * -060-NNNN - ** - ***


*	TYPE OF MANIFOLD
S	Series connection
P	Parallel connection

**	NUMBER OF SECTION
01	manifold with one section
02	manifold with two sections
03	manifold with three sections
04	manifold with four sections
05	manifold with five sections
06	manifold with six sections
07	manifold with seven sections


***	PORTS		
	P line	T line	M
G38	G 3/8"	G 3/8"	G 1/4"
U09	9/16"-18 UNF	9/16"-18 UNF	7/16"-20 UNF

QUICK CODE	
DESCRIPTION	CODE
LDNP-060-NNNN-01-G38	LD000156
LDNP-060-NNNN-02-G38	LD000155
LDNP-060-NNNN-03-G38	LD000147
LDNP-060-NNNN-04-G38	LD000146
LDNP-060-NNNN-05-G38	LD000154
LDNP-060-NNNN-06-G38	LD000153
LDNP-060-NNNN-07-G38	LD000157

MANIFOLD CONFIGURATIONS





LDNP-060



LDNS-060


MONOBLOCK PRESSURE DROP

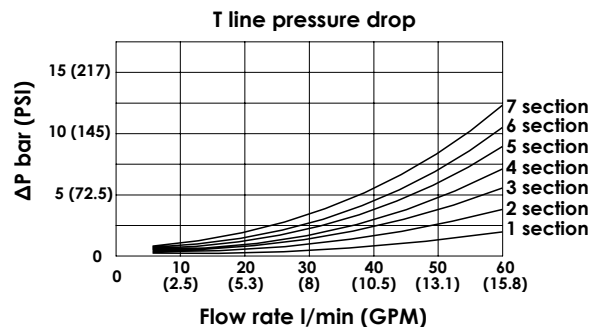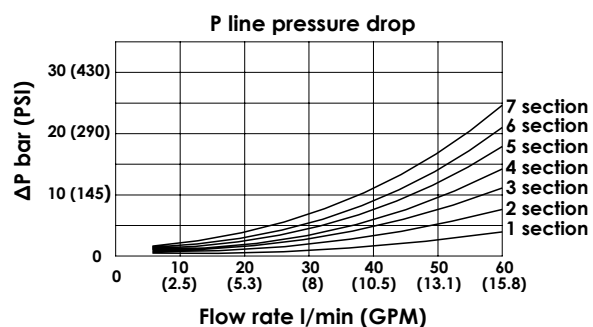


LDNS-060-NNNN

**CAST-IRON
MANIFOLD**

GAS VERSION

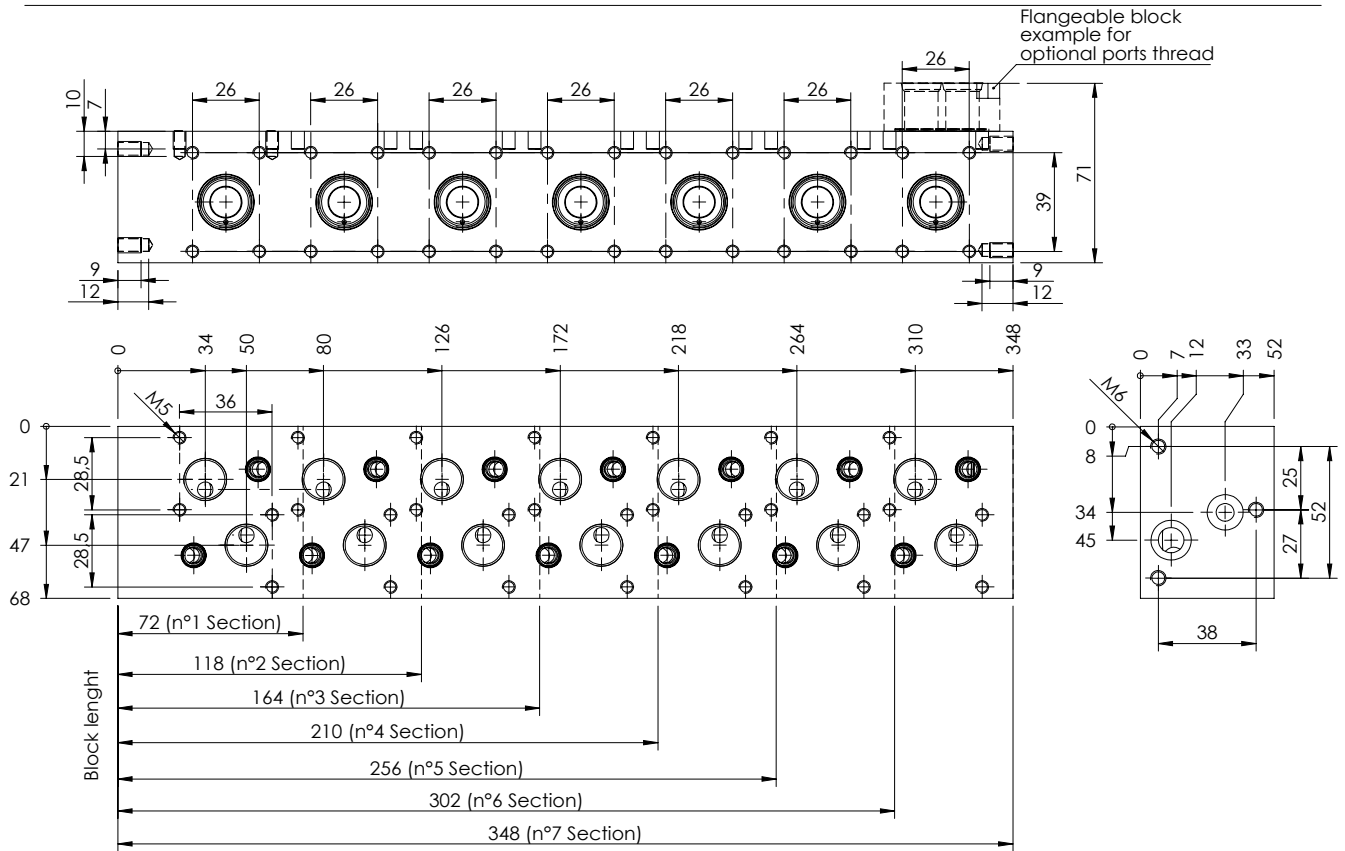


SAE VERSION

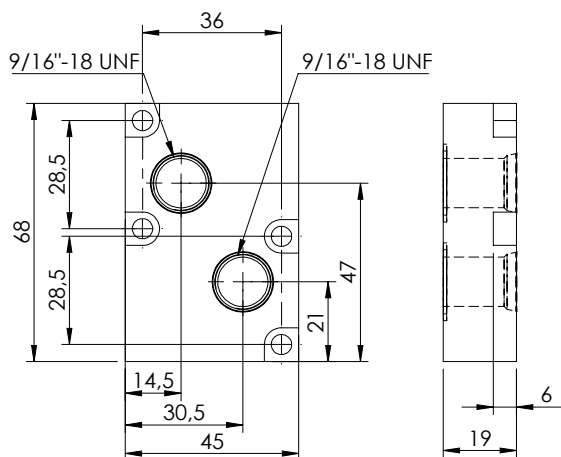

This top flangeable block transform the monoblock to a UNF version.


Quick code: MP000096

METRIC VERSION

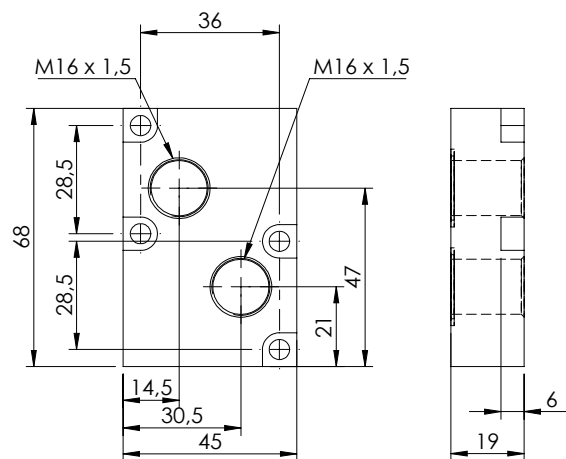

This top flangeable block transform the monoblock to a Metric version.

Quick code: MP000097

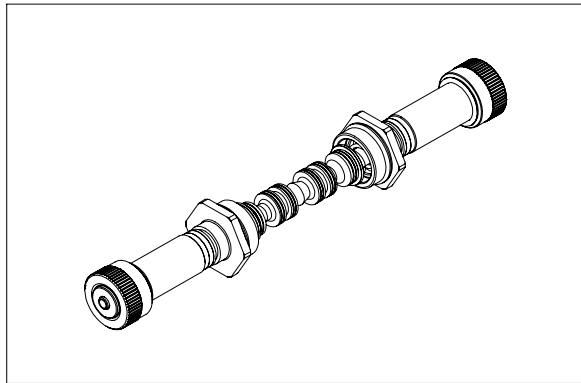

This spool group is rated for 30 lpm and for a maximum pressure of 320 bar; the spool is actuated by on off tubes and can be ordered with different hydraulic schemes. Each spools is interchangeable to give maximum flexibility and can be fit in all monoblock sections, changing spools require adequate training. The group is made by two tubes, one spool, two springs and mounting components.

TECHNICAL DATA

Max pressure	320 bar
Rated flow	30 l/min
Duty cycle	100 % ED
Hydraulic fluid	Mineral oil DIN 51 524
Fluid viscosity	10/500 mm ² /s
Fluid temperature	-25°C/75°C
Environment temperature	-25°C/60°C
Weight with one solenoid	0,15 Kg
Weight with two solenoid	0,12 kg

ORDERING DETAILS: SEPARATE ELEMENTS

SH* *- 030 - NN** - ** -321- * **N

* OVERRIDE TYPE	
N	Standard
P	Push
V	Screw

* SECTION TYPE	
E	Solenoid operated
L	Solenoid operated plus lever operated
M	Lever operated

** ACTUATION TYPE	
ON	On/Off
SS	Soft shift

** SPOOL TYPE	
...	See table n°1

* VOLTAGE	
	no coils
A	12 V dc
B	24 V dc

** COILS TYPE	
	no coils
HR	Hirschmann (ISO 4400 DIN 43650)
DT	Deutsch (DT04-2P)
AJ	Amp junior (AJ type)




QUICK CODE	
DESCRIPTION	CODE
SHNE-030-NNON-46-321	
SHNE-030-NNON-10-321	
SHNE-030-NNON-07-321	

HYDRAULIC SYMBOLS

Table n°1

SPOOL CODE	HYDRAULIC SCHEME	TRANSITORY POSITION	
46			
10			
07			
SPOOL CODE	HYDRAULIC SCHEME	TRANSITORY POSITION	
a	b	a	b
23			
21			
22			
17			
18			


OVERRIDE TYPE

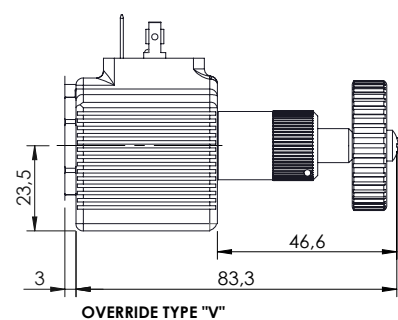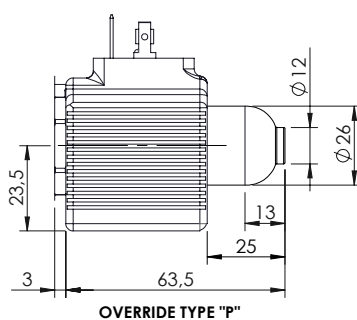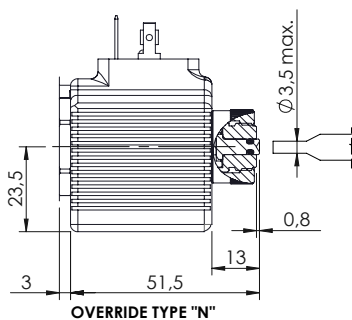

SHNE-030-NNON

30 L/MIN SOLENOID VALVE


PERFORMANCE LIMITS CURVES - STANDARD SECTION

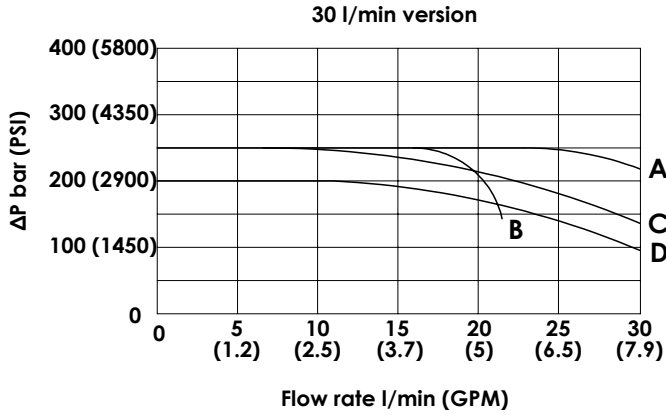

Spool type	Performance limits curve
46	A
10	A
07	B
23	A
21	A
22	A
17	C
18	D

The tests are carried out with hot solenoids, powered with 90% of nominal voltage, with 50 °C fluid temperature. The fluid used is mineral oil having a viscosity of 46 mm² / s @ 40 °C. The values in the diagram refer to tests carried out with flow simultaneously in both directions (P > A, B > T). In cases of schemes 4/2 or 4/3 used with the flow in one direction only the performance can change.

PRESSURE DROP CURVES - STANDARD SECTION

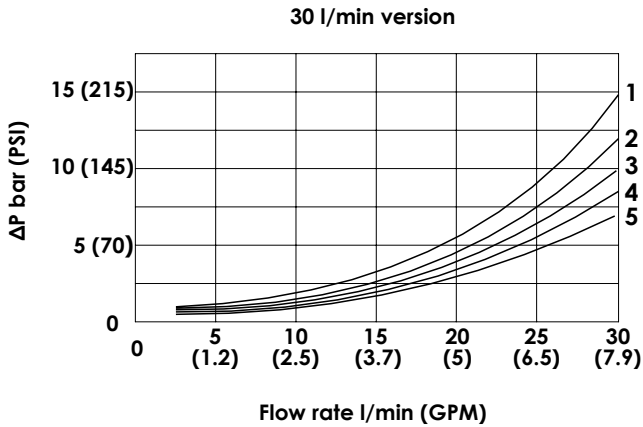


Spool type	Pressure drop curve				
	P>A	P>B	A>T	B>T	P>T
46	3	3	4	4	/
10	3	3	5	5	/
07	2	2	1	1	2
23	/	3	4	/	/
21	/	3	5	/	/
22	2	/	/	1	/
17	/	3	4	/	/
18	/	2	3	/	/


The diagram shows the performance limit curve of standard section. The fluid used is mineral oil viscosity 46 mm²/s at 40 °C ; the tests are performed at a 40 °C temperature

OVERALL DIMENSION - STANDARD SECTION

In case of top modular valve MA or MC type installation the coil connection can be faced to the top or to the bottom of the block. (See modular valve section)

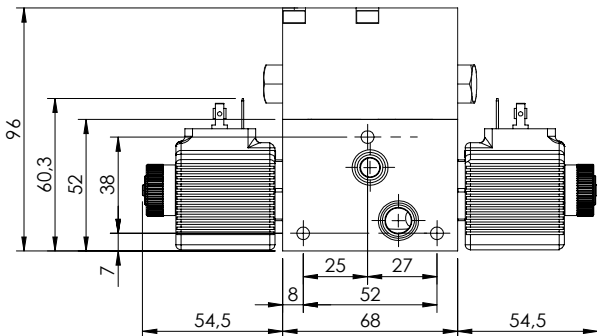


In case of top modular valve MB, KE and KF type installation the coil connection can be faced only to the bottom of the block. (See modular valve section)

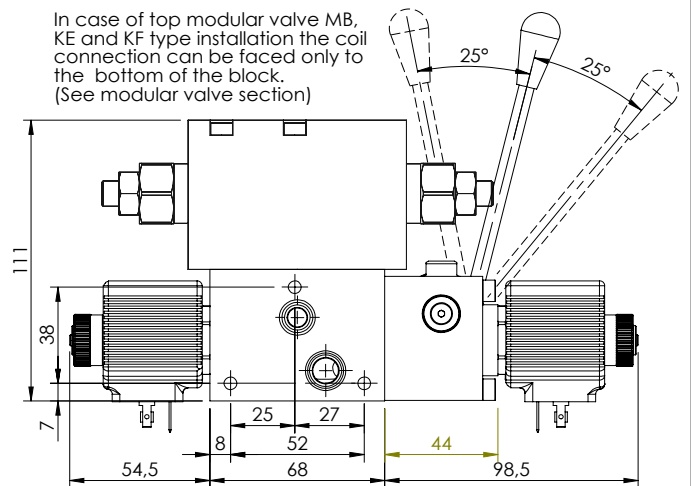

SHNE-060-NNON

60 L/MIN
SOLENOID VALVE

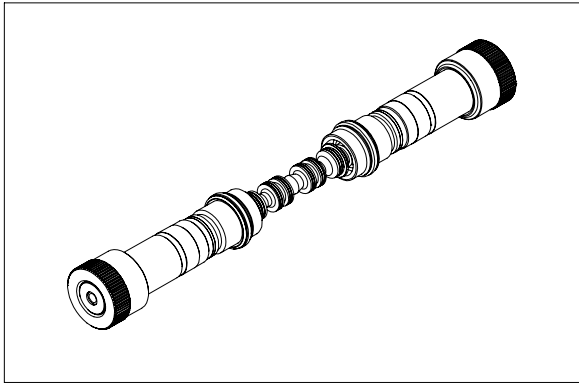

This spool group is rated for 60 lpm and for a maximum pressure of 320 bar; the spool is actuated by on off tubes and can be ordered with different hydraulic schemes. Each spools is interchangeable to give maximum flexibility and can be fit in all monoblock sections, changing spools require adequate training. The group is made by two tubes, one spool, two springs and mounting components.

TECHNICAL DATA

Max pressure	320 bar
Rated flow	60 l/min
Duty cycle	100 % ED
Hydraulic fluid	Mineral oil DIN 51524
Fluid viscosity	10/500 mm ² /s
Fluid temperature	-25°C/75°C
Environment temperature	-25°C/60°C
Weight with one solenoid	0,2 Kg
Weight with two solenoid	0,4 kg

ORDERING DETAILS: SEPARATE ELEMENTS

SH** - 060 - NN** - ** - 321 - ** * N

*	VERRIDE TYPE
N	Standard
P	Push
V	Screw

*	SECTION TYPE
E	Solenoid operated
L	Solenoid operated plus lever operated
M	Lever operated

**	ACTUATION TYPE
ON	On/Off
SS	Soft shift

**	SPOOL TYPE
...	See table n°1

*	VOLTAGE
	no coils
A	12 V dc
B	24 V dc

**	COILS TYPE
	no coils
HR	Hirschmann (ISO 4400 DIN 43650)
DT	Deutsch (DT04-2P)
AJ	Amp junior (AJ type)


QUICK CODE	
DESCRIPTION	CODE
SHNE-060-NNON-46-321	
SHNE-060-NNON-10-321	
SHNE-060-NNON-07-321	

HYDRAULIC SYMBOLS

Table n°1

SPOOL CODE	HYDRAULIC SCHEME	TRANSITORY POSITION	
46			
10			
07			
SPOOL CODE	HYDRAULIC SCHEME	TRANSITORY POSITION	
a	b	a	b
23			
21			
22			
17			
18			


VERRIDE TYPE

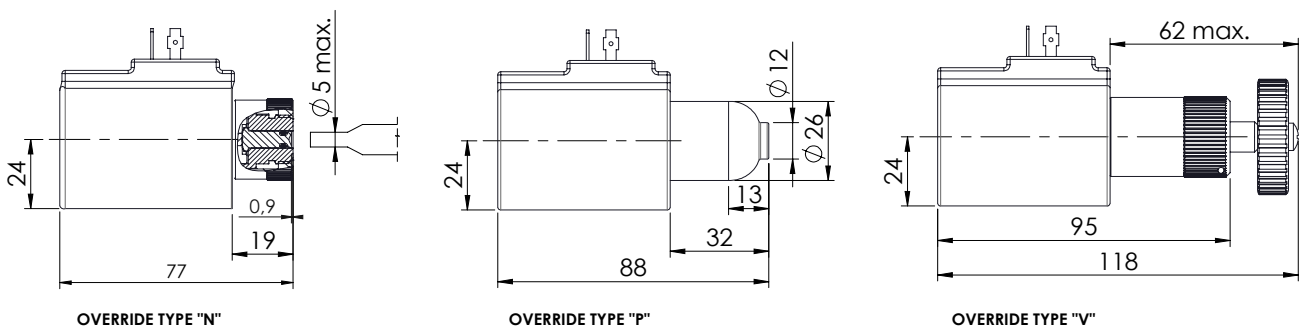

SHNE-060-NNON

60 L/MIN SOLENOID VALVE

PERFORMANCE LIMIT CURVES - STANDARD SECTION

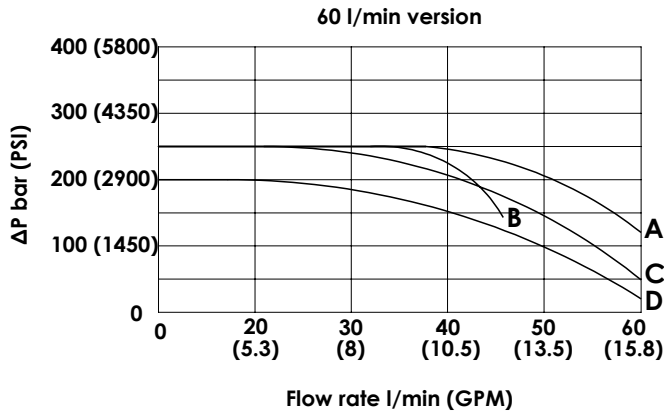


Spool type	Performance limits curve
46	A
10	A
07	B
23	A
21	A
22	A
17	C
18	D

The tests are carried out with hot solenoids, powered with 90 % of nominal voltage, with 50 °C fluid temperature. The fluid used is mineral oil having a viscosity of 46 mm² / s @ 40 °C.

The values in the diagram refer to tests carried out with flow simultaneously in both directions (P > A, B > T).

In cases of schemes 4/2 or 4/3 used with the flow in one direction only the performance can change.

PRESSURE DROP CURVES - STANDARD SECTION

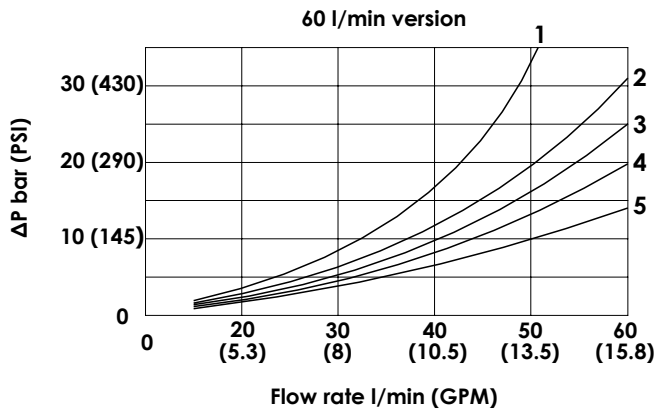


Spool type	Pressure drop curve				
	P>A	P>B	A>T	B>T	P>T
46	3	3	4	4	/
10	3	3	5	5	/
07	2	2	1	1	2
23	/	3	4	/	/
21	/	3	5	/	/
22	2	/	/	1	/
17	/	3	4	/	/
18	/	2	3	/	/


The diagram shows the performance limit curve of standard section. The fluid used is mineral oil viscosity 46 mm²/s at 40 °C ; the tests are performed at a 40 °C temperature

OVERALL DIMENSION - STANDARD SECTION

In case of top modular valve MA or MC type installation the coil connection can be faced to the top or to the bottom of the block. (See modular valve section)

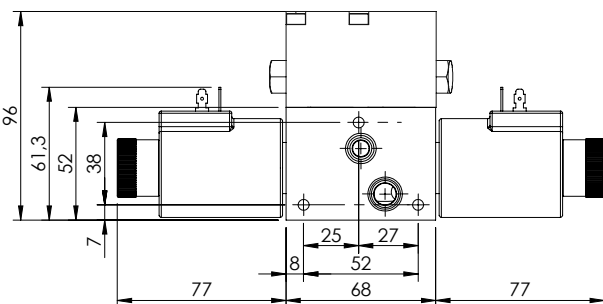


In case of top modular valve MB, KE and KF type installation the coil connection can be faced only to the bottom of the block. (See modular valve section)

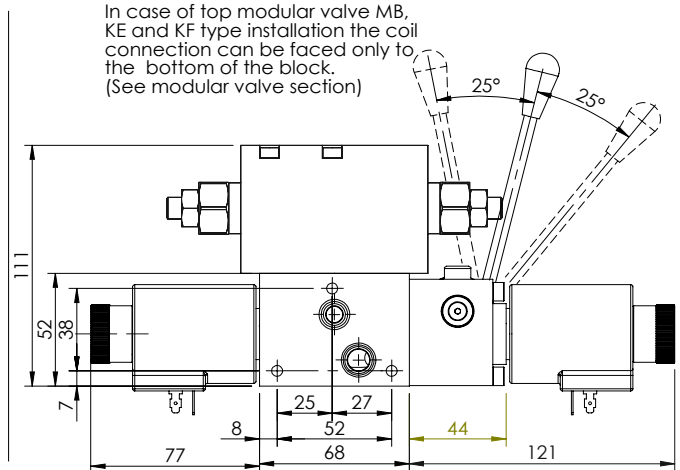

SHNE-050-NNPR

**50 L/MIN
PROPORTIONAL
SOLENOID VALVE**

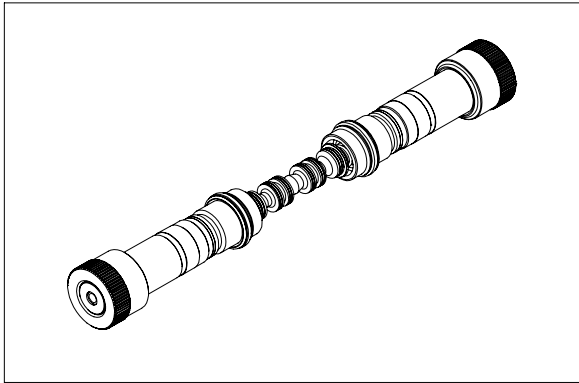

This spool group is rated for 50 lpm and for a maximum pressure of 320 bar; the spool is actuated by proportional tubes and can be ordered with different hydraulic schemes. Each spools is interchangeable to give maximum flexibility and can be fit in all monoblock sections, changing spools require adequate training. The group is made by two tubes, one spool, two springs and mounting components.

TECHNICAL DATA

Max pressure	320 bar
Rated flow	50 l/min
Duty cycle	100 % ED
Max current	1.76A (12 V dc) 0.88A (24 V dc)
Hydraulic fluid	Mineral oil DIN 51524
Fluid viscosity	10/500 mm
Fluid temperature	-25°C/75°C
Environment temperature	-25°C/60°C
Weight with one solenoid	0,2 Kg
Weight with two solenoid	0,4 kg

ORDERING DETAILS: SEPARATE ELEMENTS

SH - 0**-NNPR-**-321-***N**

*	VERRIDE TYPE
N	Standard
P	Push
V	Screw

*	SECTION TYPE
E	Solenoid operated
L	Solenoid operated plus lever operated
M	Lever operated

*	SPOOL FLOW
20	20 l/min at 12 bar - 10 l/min at 6 bar
35	35 l/min at 12 bar - 20 l/min at 6 bar
50	50 l/min at 12 bar - 30 l/min at 6 bar

**	
...	See table n°1

*	VOLTAGE
	no coils
A	12 V dc
B	24 V dc

**	COILS TYPE
	no coils
HR	Hirschmann (ISO 4400 DIN 43650)
DT	Deutsch (DT04-2P)
AJ	Amp junior (AJ type)

QUICK CODE	
DESCRIPTION	CODE
SHNE-030-NNPR-59-321	
SHNE-030-NNPR-55-321	


HYDRAULIC SYMBOLS

Table n°1


SPOOL CODE	HYDRAULIC SCHEME		TRANSITORY POSITION		
	a	b	a	b	
59					
55					
SPOOL CODE	HYDRAULIC SCHEME		TRANSITORY POSITION		
a	b	a	b	a	b

For single solenoid operation please contact AFT sales network.


VERRIDE TYPE

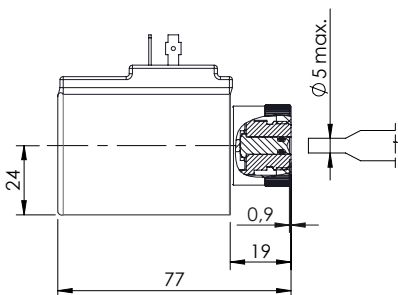

VERRIDE TYPE "N"

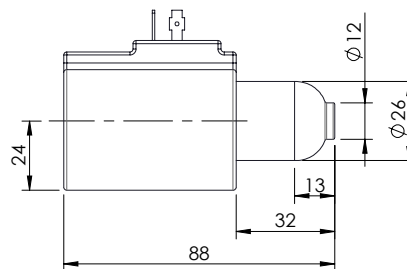

VERRIDE TYPE "P"

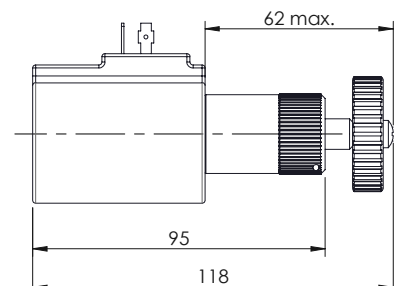


VERRIDE TYPE "V"


SHNE-050-NNPR

50 L/MIN
PROPORTIONAL
SOLENOID VALVE


FLOW DIAGRAM - 050

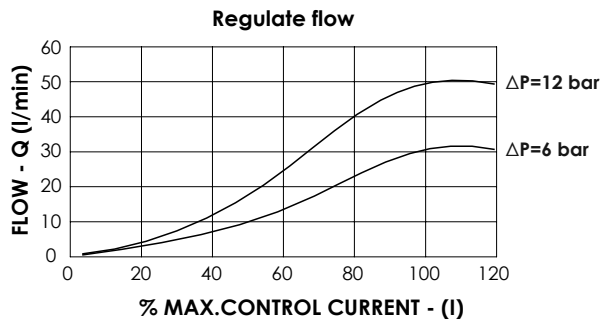


REGULATION DIAGRAM - 050

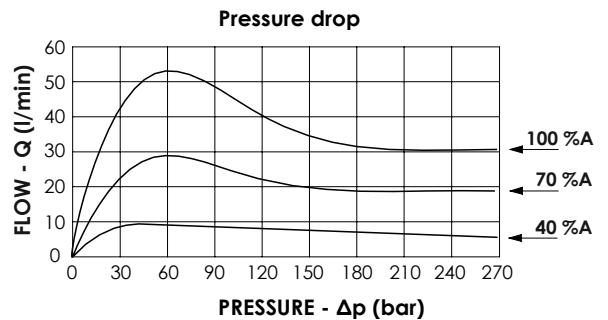


FLOW DIAGRAM - 035

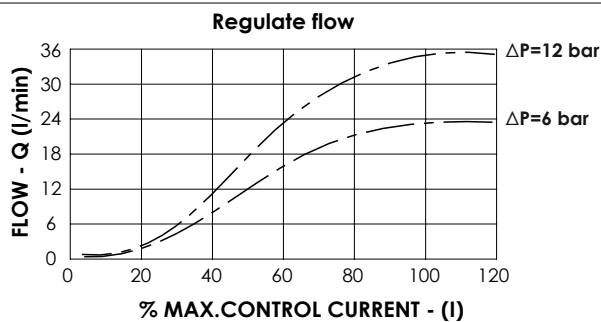


REGULATION DIAGRAM - 035

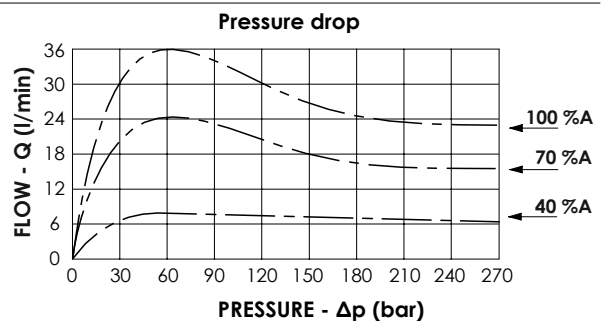

FLOW DIAGRAM - 020

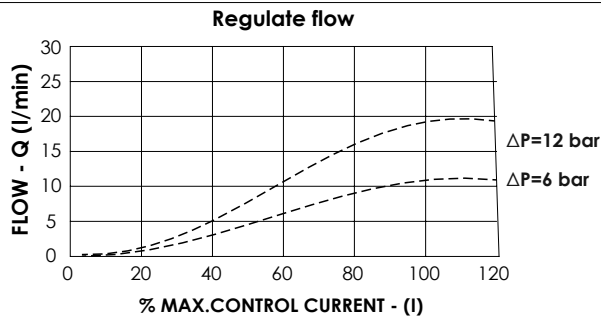

REGULATION DIAGRAM - 020

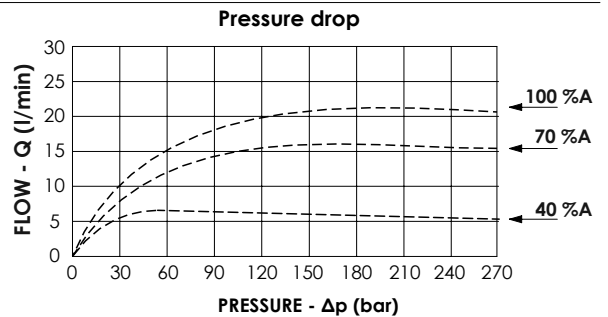


Spool type:
 -10 -----
 -20 -----
 -30 -----


The diagram shows the performance limit curve of a standard section. The fluid used is mineral oil with viscosity of 46 mm²/s @ 40 °C ; the tests are performed at a 40 °C temperature.

OVERALL DIMENSION - STANDARD SECTION

In case of top modular valve MA or MC type installation the coil connection can be faced to the top or to the bottom of the block. (See modular valve section)

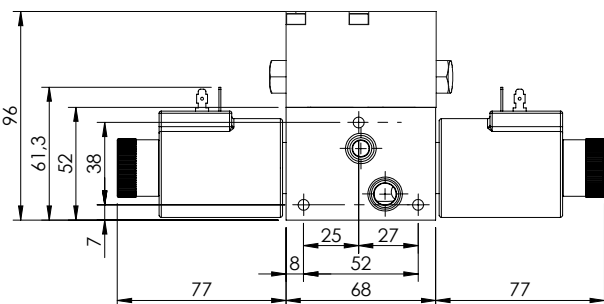


In case of top modular valve MB, KE and KF type installation the coil connection can be faced only to the bottom of the block. (See modular valve section)

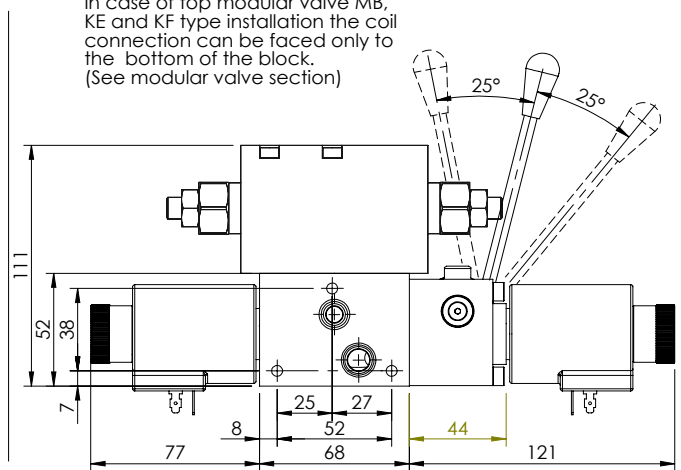

SHNE-030-POPR

**30 L/MIN
PROPORTIONAL FLOW
UNLOADING**

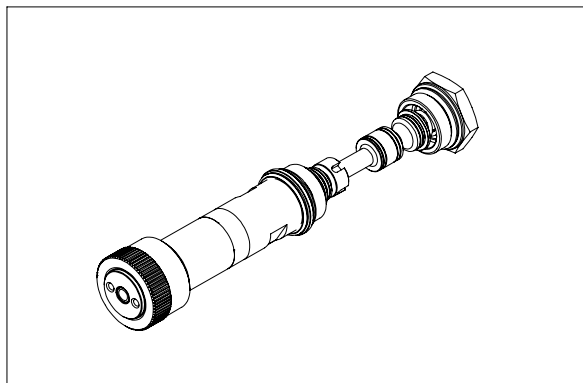

The solenoid valve can be ordered with 3 types of ports for connection nipples, G 3/8" 9/16"-18 UNF (SAE6) and M16x1, 5. Spool actuation is electrical and the center position is maintained through centering springs with calibrated length, upon termination of the solenoid action, springs immediately reposition the cursor in the central position. The solenoids are only available in the continuous current (the most common strains); the coil will be supply with terminals DIN 43650 ISO 4400 (for standard versions). The valve have cast iron body with black galvanizing surface treatment with sealant.

TECHNICAL DATA

Max pressure	320 bar
Rated flow	25 l/min
Duty cycle	100 % ED
Max current	1.76A (12 V dc) 0.88A (24 V dc)
Hydraulic fluid	Mineral oil DIN 51524
Fluid viscosity	10/500 mm
Fluid temperature	-25°C/75°C
Environment temperature	-25°C/60°C
Weight with one solenoid	2 Kg
Weight with two solenoid	2,5 kg

ORDERING DETAILS: SEPARATE ELEMENTS

SH - 0** - POPR - ** - 321 - ** *N**

*	VERRIDE TYPE
N	Standard
P	Push
V	Screw

*	SECTION TYPE
E	Solenoid operated
L	Solenoid operated plus lever operated
M	Lever operated

**	SPOOL FLOW
10	12 l/min at 10 bar
20	18 l/min at 10 bar
30	25 l/min at 10 bar

**	PROPORTIONAL TYPE
88	Not compensated

*	VOLTAGE
	no coils
A	12 V dc
B	24 V dc

**	COILS TYPE
	no coils
HR	Hirschmann (ISO 4400 DIN 43650)
DT	Deutsch (DT04-2P)
AJ	Amp junior (AJ type)

QUICK CODE	
DESCRIPTION	CODE
SHNE-030-POPR-88-321	
SHNE-020-POPR-88-321	
SHNE-010-POPR-88-321	

TECHNICAL FEATURES


Spool Flow	Rated flow with 10 bar ΔP	Maximum flow	Max. operating pressure
10	10	12	320
20	16	18	320
30	23	28	320

HYDRAULIC SYMBOLS

Table n°1

SPOOL CODE	HYDRAULIC SCHEME	TRANSITORY POSITION
88		


VERRIDE TYPE

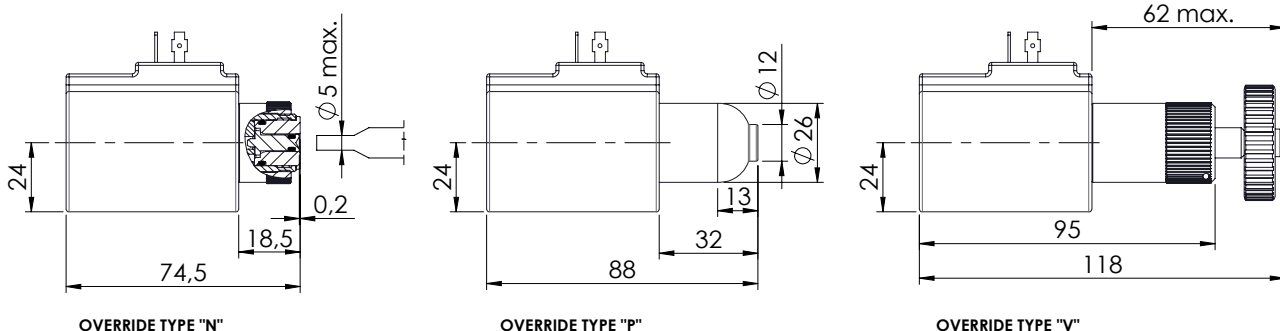


SHNE-030-PRPO

30 L/MIN
PROPORTIONAL FLOW
UNLOADING


FLOW DIAGRAM - 030

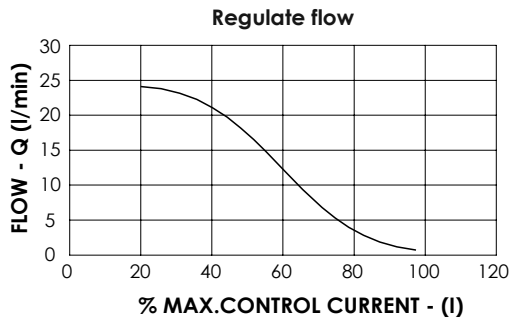


PRESSURE DROP DIAGRAM - 030

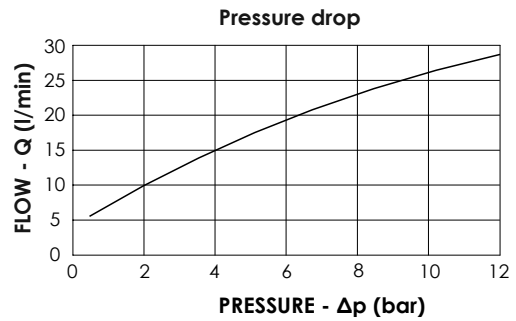


FLOW DIAGRAM - 020

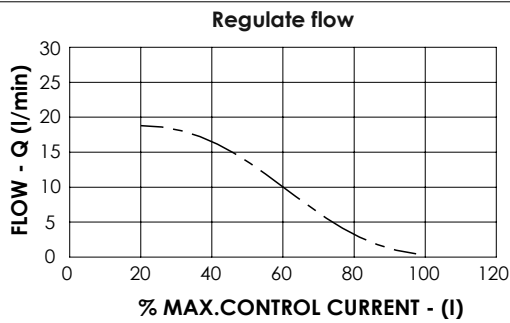


PRESSURE DROP DIAGRAM - 020

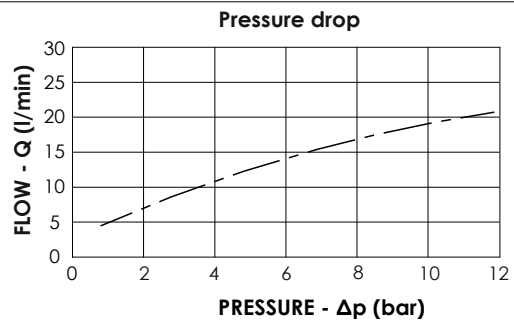

FLOW DIAGRAM - 010

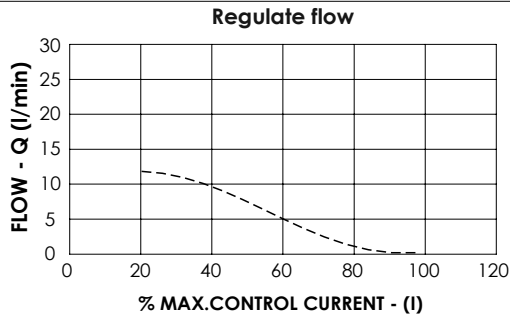

PRESSURE DROP DIAGRAM - 010


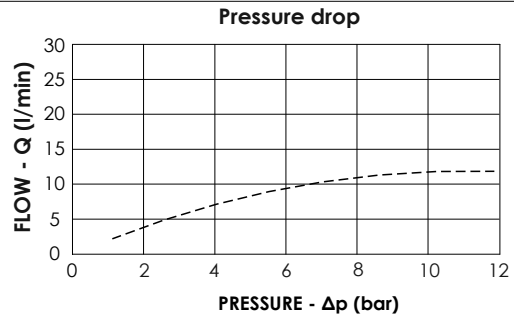


Spool type:


- 10 -----
- 20 -----
- 30 -----

The diagram shows the performance limit curve of a standard section. The fluid used is mineral oil with viscosity of 46 mm²/s @ 40 °C ; the tests are performed at a 40 °C temperature.

OVERALL DIMENSION - STANDARD SECTION

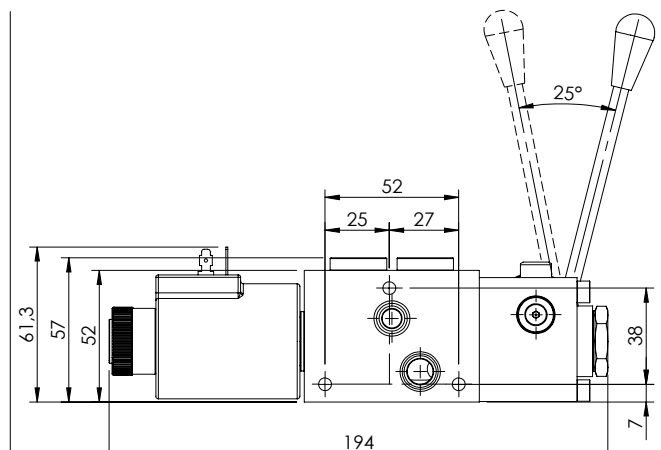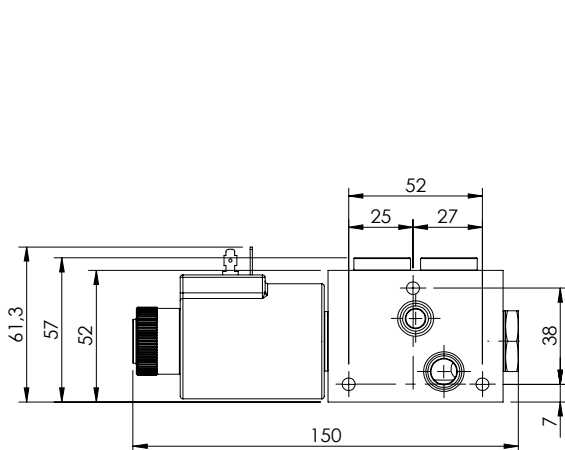

MANUAL LEVER

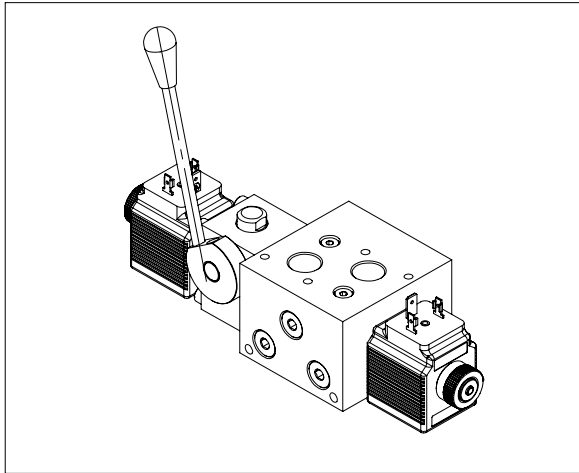


The lever option allow to operate manually the spool and can be ordered for all hydraulic schemes; in the standard version it is installed between monoblock and B port side coil. The lever is normally installed on the monoblock port side but can be installed also rotated of 180°; in each of these two positions the lever can be mounted vertical or horizontal simply removing the lever and reinstalling. The lever is not engaged during solenoid operation and doesn't move when a coil is energized.

TECHNICAL DATA

Tabella generale	
Max pressure	210/320 bar
Max pressure series version	210 bar
Rated flow	30/60 l/min
Duty cycle	100 % ED
Weight more than standard	2 Kg
Weight more than standard	2,5 kg


OVERALL DIMENSIONS/ LEVER FOR 30 L/MIN SECTION

The lever option is designed to activate the spool manually, when the lever is pulled the flow is delivered from the port close to the lever, when it is pushed the flow is delivered from the port opposite to the lever. The standard operation deliver full flow, in case of override operation it is possible to reduce the maximum stroke and consequently the speed, for this option contact AFT sales network. The lever can be easily positioned vertical or horizontal by unscrewing it from the rotating shaft.

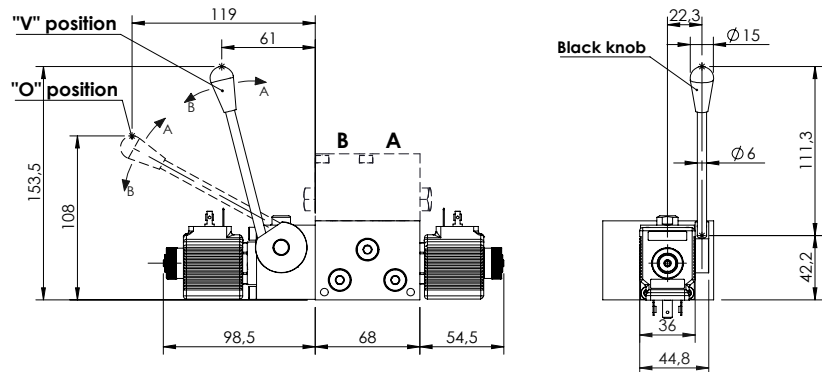


OVERALL DIMENSIONS/ LEVER FOR 60 L/MIN SECTION

The lever option is designed to activate the spool manually, when the lever is pulled the flow is delivered from the port close to the lever, when it is pushed the flow is delivered from the port opposite to the lever. The standard operation deliver full flow, in case of override operation it is possible to reduce the maximum stroke and consequently the speed, for this option contact AFT sales network. The lever can be easily positioned vertical or horizontal by unscrewing it from the rotating shaft.

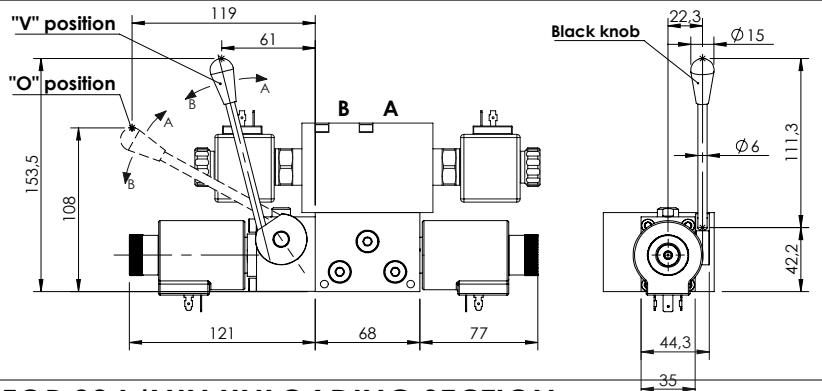


OVERALL DIMENSION/ LEVER FOR 30 L/MIN UNLOADING SECTION

The lever option is designed to activate the spool manually, when the lever is pulled the flow is delivered from the port close to the lever, when it is pushed the flow is delivered from the port opposite to the lever. The standard operation deliver full flow, in case of override operation it is possible to reduce the maximum stroke and consequently the speed, for this option contact AFT sales network. The lever can be easily positioned vertical or horizontal by unscrewing it from the rotating shaft.

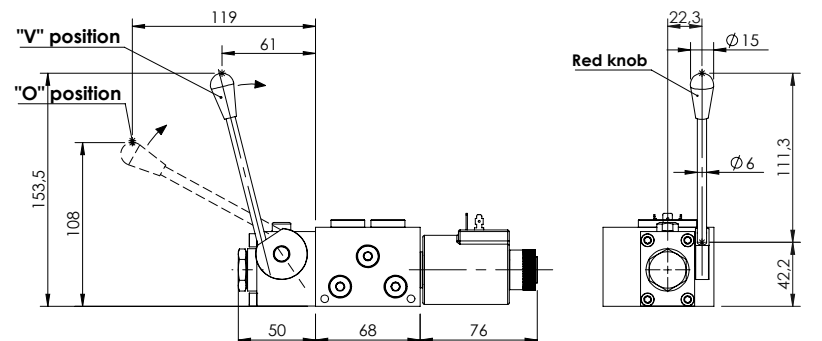

MOUNTING ELEMENTS


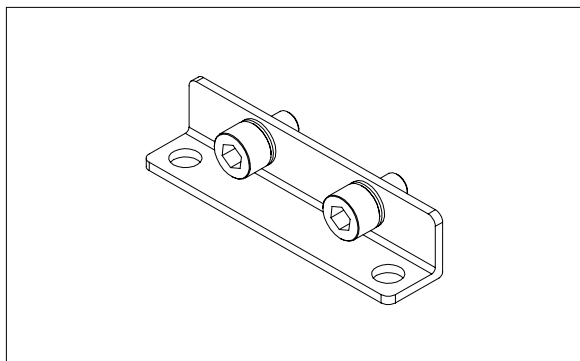


These parts are used to mount the directional valve on the application or to install modular valves and inlet section on the monoblock.

TECHNICAL DATA


Screw type	ISO 4762
Thread type	coarse thread
Standard screw	resistance class 8.8
High resistance screw	resistance class 12.9
Standard screw treatment	zinc-plated (white)
High res. screw treatment	Anodized (black)

MOUNTING BRACKETS

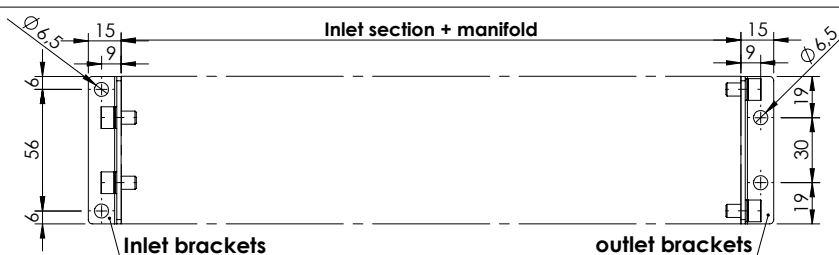


Mounting brackets	Screw length (mm)	Reference	Tightening Torque
PV000371	M6x10	AV000015 + PR000129	6 - 7 N/m

MOUNTING INLET SECTION



Inlet section	Screw length (mm)	Reference	Tightening Torque
SF000004	M6X40	AV000051	6 - 7 N/m
SF000016	M6X50	PE000100	6 - 7 N/m
SF000003	M6X60	AV000074	6 - 7 N/m
SF000002	M6X60	AV000074	6 - 7 N/m
SF000001	M6X75	PE000418	6 - 7 N/m

FIXING STACKING MODULES



Flangiabe valve	Screw length (mm)	Reference	Tightening Torque
MP	M5x16	AV000035	3 - 4 N/m
MA, MC and MB	M5x45	PE000148	3 - 4 N/m
KE and MF	M5x60	AV000016	3 - 4 N/m




1800-OILSOL
1800-645765

<https://oilsolutions.com.au/>

sales@oilsolutions.com.au

EBL series

MONOBLOCK LOAD SENSING VALVE ON-OFF OR PROPORTIONAL

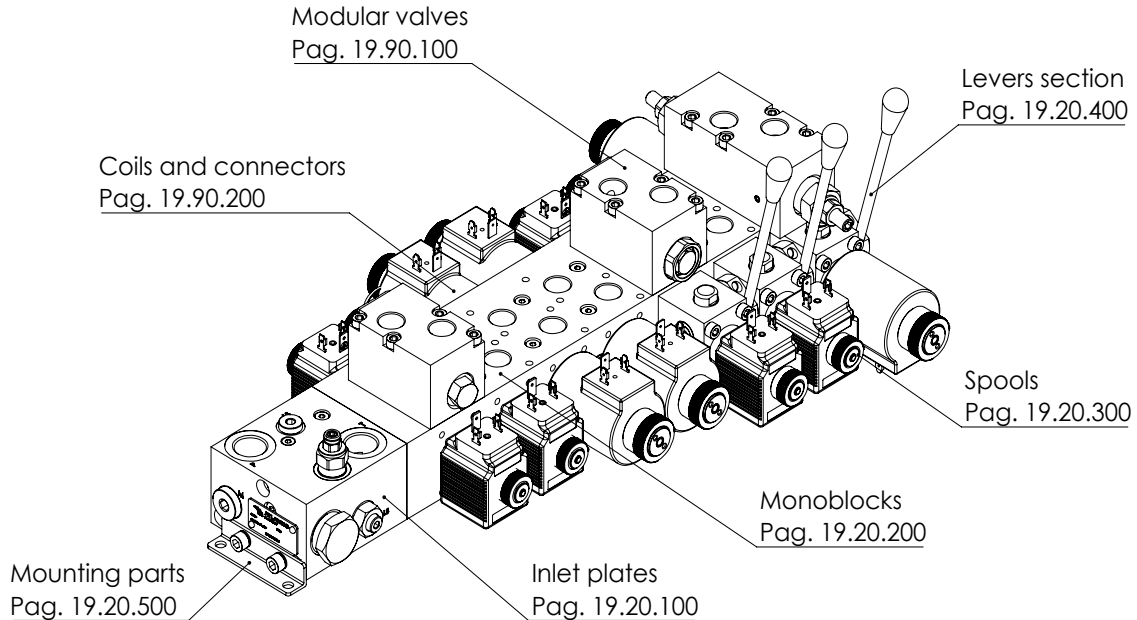

FEATURES

- Compact dimensions
- Low weight
- Custom spools
- Custom inlet blocks
- LS line on each spool section
- Sandwich valves for extra functions
- Cast iron monoblock and aluminum inlet block for standard applications
- High resistance cast iron monoblock and steel inlet block for high pressure systems
- Optional levers for manual operation
- No leak risk between sections
- Spools not under rod tension
- Zinc plated/anodized components for corrosion resistance

SPECIFICATION \ DESCRIPTION

MAXIMUM OPERATING PRESSURE	Steel inlet block: 320 bar (4600 PSI) Aluminium inlet block: 210 bar (3045 PSI)
MAXIMUM TANK PRESSURE	20 bar (290 PSI)
RATED FLOW	030 series: 30 l/min (7.9 GPM) 060 series: 60 l/min (15.8 GPM)
COIL POWER	030 series: 26 W 060 series: 33 W
VOLTAGE	12 Vdc, 24 V DC, others on request
COIL CONNECTOR	DIN43650, AMP Junior, Deutsch DT04-2P
PORTS	Inlet: G1/2", 1/2 JIS, 7/8-14 UNF-2B (SAE#10) Outlet: G3/8", 3/8 JIS, 3/4-16 UNF-2B (SAE#8)
OPERATING TEMPERATURE	NBR (ISO 1629) seals: -30, +80 °C FKM (ISO 1629) seals: -20, +110 °C
FILTRATION	ISO 4406:1999: class 19/17/14 NAS 1638: class 8
MOUNTING POSITION	No restrictions
MATERIAL	Spool body: cast iron Spool: Hardened and grounded steel Inlet block: Aluminium or steel
SURFACE TREATMENT	Steel: zinc plating Aluminium: anodization

EBL series is a new directional load sensing valve that has innovative features in terms of performance, dimension, manufacturing reliability and customization. The valve consists in an inlet block flanged to a monoblock with spools. This construction gives the advantages of high flexibility in inlet block schemes, combined with the reliability and simplicity of monoblock spool valve construction, eliminating the risk of spools blocking due to overtightening of tie rods or the risk of leakage between sections. The spool monoblock is a 2 or 3 position, 4 ways, direct acting solenoid operated type. All sections have threaded ports at the top and removable plugs for tank connections to allow the installation of flanged blocks with additional functions like crossover reliefs, reliefs to tank, relief and anticavitations, counterbalance valves, P.O. checks, flow restrictors and flow regulators. All sections are equipped with standard push button override and they can be equipped with lever for manual use.

HOW ORDER IT

To order the separate parts please refer to each catalogue page.


To order an assembled block, contact AFT sales network specifying the part numbers following page 19.90.900 path.

For special versions please contact AFT sales network.


EBL series - INLET SECTION

SFLL-060-ZDNN-16

**P, T PORTS
M PORT**

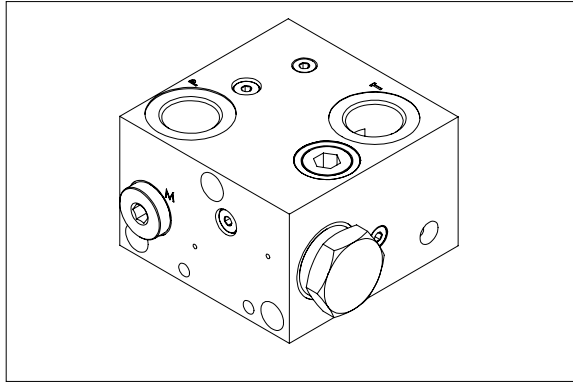

HYDRAULIC SCHEME

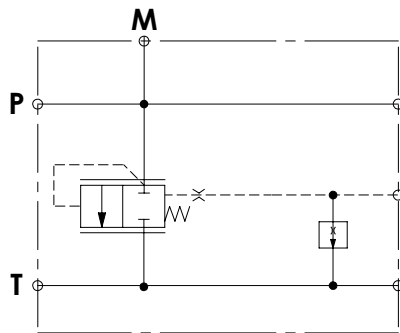


This inlet section is equipped with two thread ports (P,T) available in two different types G 1/2" or 3/4"-16 UNF plus a third threaded port M for pressure measuring available in G 1/4" or 7/16"-20. The manifold material is aluminium for applications up to 210 bar or zinc plated steel for applications up to 320 bar.

TECHNICAL DATA

Max pressure	210/320 bar
Rated flow	60 l/min
Hydraulic fluid	Mineral oil DIN 51524
Fluid viscosity	10-500 mm ² /s
Fluid temperature	-25°C/75°C
Environment temperature	-25°C/60°C
Weight	0,9 Kg

PRESSURE DROP LOGIC ELEMENT

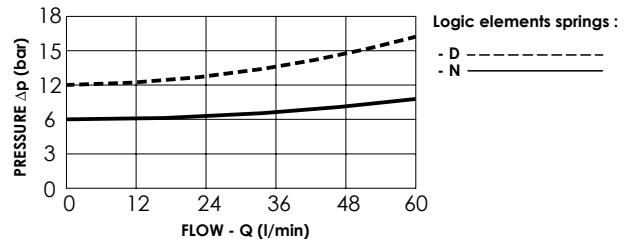


ORDERING DETAILS: SEPARATE ELEMENTS

SFLL-060- * * NN-16- * -N**

* MATERIAL TYPE	
A	Steel zinc-plated (320 bar)
Z	Aluminium anodized (210 bar)
* LOGIC ELEMENT SPRING	
D	Spring setting 12 bar (CD000103)
N	Spring setting 6 bar (CD000073)
*** PORTS	
	P line T line M
G12	G 1/2" G 1/2" G 1/4"
U34	3/4"-16 UNF 3/4"-16 UNF 7/16"-20 UNF
QUICK CODE	
DESCRIPTION	CODE
SFLL-060-ZDNN-16-G12-N	SF000045

OVERALL DIMENSIONS

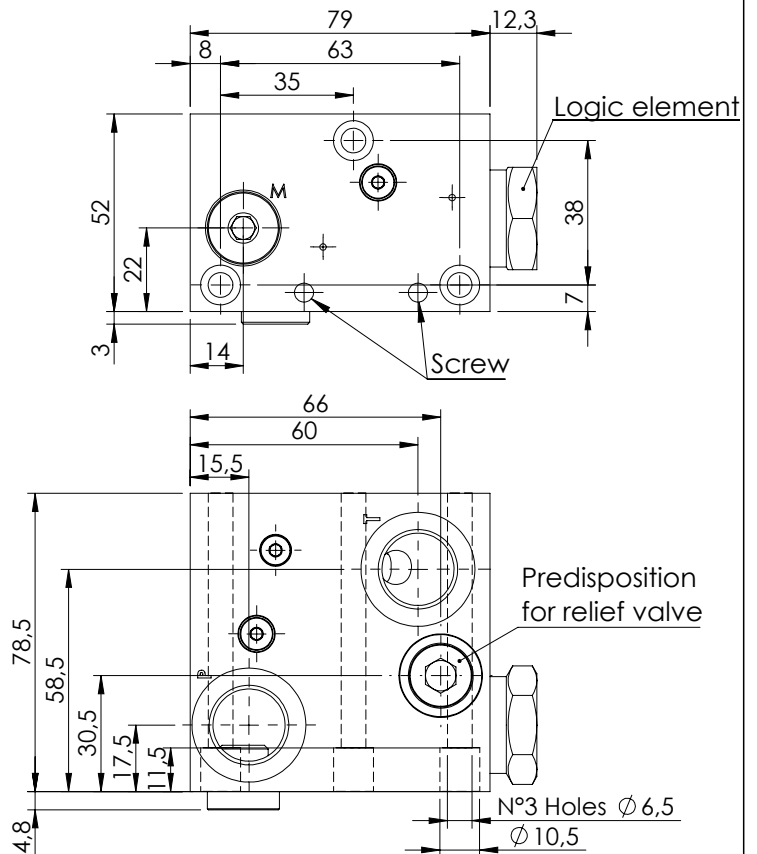


EBL series - INLET SECTION




SFLL-060-ZDNN-17

**RELIEF VALVE
M PORT**

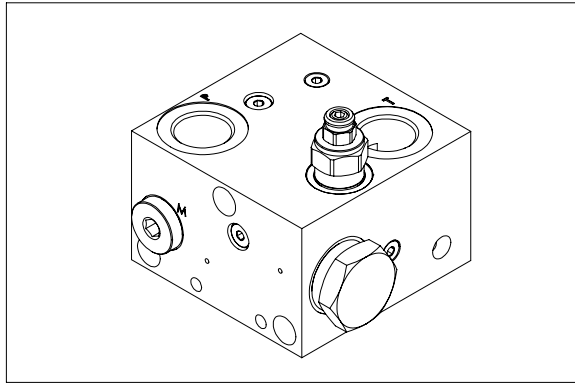

HYDRAULIC SCHEME

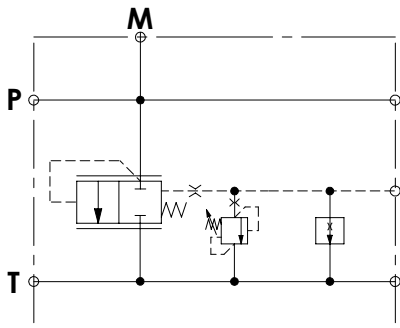


This inlet section is equipped with relief valve with adjustable setting operating on Ls signal, the adjustment is made by socket screw. This inlet section is equipped with two thread ports (P,T) available in two different types G 1/2" or 3/4"-16 UNF plus a third threaded port M for pressure measuring available in G 1/4" or 7/16"-20. The manifold material is aluminium for applications up to 210 bar or zinc plated steel for applications up to 320 bar.

TECHNICAL DATA

Max pressure	210/320 bar
Rated flow	60 l/min
Hydraulic fluid	Mineral oil DIN 51524
Fluid viscosity	10-500 mm ² /s
Fluid temperature	-25°C/75°C
Environment temperature	-25°C/60°C
Weight	0,9 Kg

PRESSURE DROP LOGIC ELEMENT

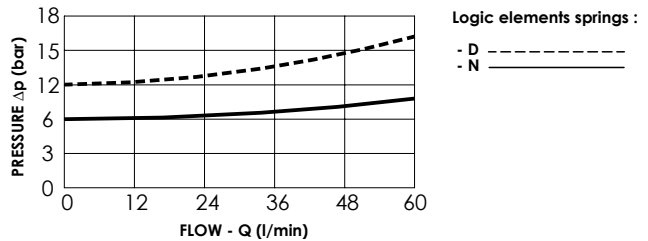

ORDERING DETAILS: SEPARATE ELEMENTS

SFLL-060-*N-17-***-N**

*	MATERIAL TYPE
A	Steel zinc-plated (320 bar)
Z	Aluminium anodized (210 bar)


*	LOGIC ELEMENT SPRING
D	Spring setting 12 bar (CD000103)
N	Spring setting 6 bar (CD000073)

*	SETTING RANGE
N	Max setting 210 bar (CP000029)
A	Max setting 110 bar (CP000030)
B	Max setting 350 bar (CP000002)

***	PORTS		
	P line	T line	M
G12	G 1/2"	G 1/2"	G 1/4"
U34	3/4"-16 UNF	3/4"-16 UNF	7/16"-20 UNF

QUICK CODE	
DESCRIPTION	CODE
SFLL-060-ZDNN-17-G12-N	SF000010
SFLL-060-ZNNN-17-G12-N	SF000032


OVERALL DIMENSIONS

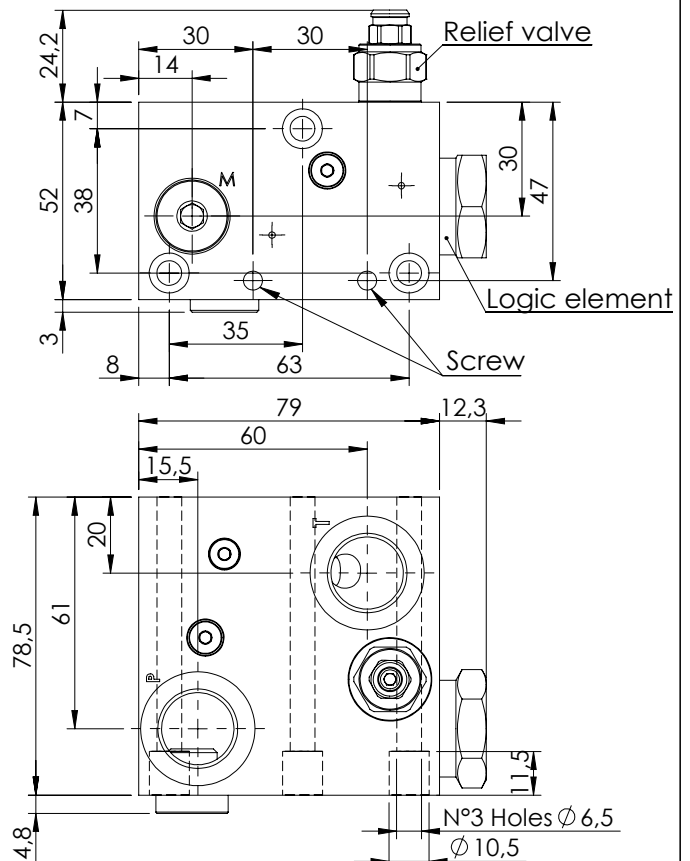


EBL series - INLET SECTION

SFLL-060-ZDNN-19

**RELIEF VALVE
UNLOADING VALVE**

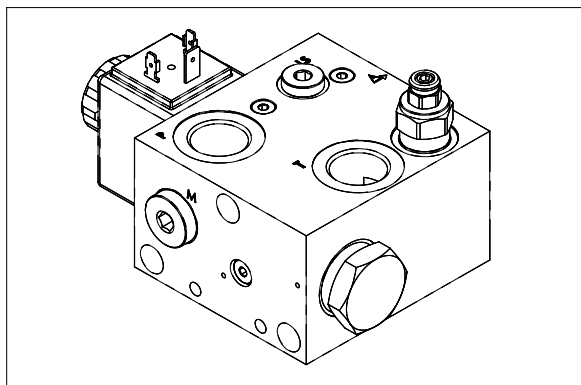

HYDRAULIC SCHEME

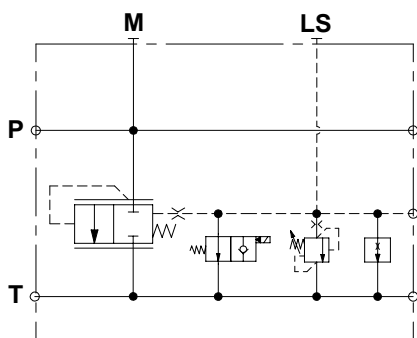


This inlet section is equipped with relief valve with adjustable setting operating on Ls signal, the adjustment is made by socket screw. It is present an unloading solenoid valve normally open with emergency operating on Ls signal. There are two thread ports (P, T) available in two different types G 1/2" or 3/4"-16 UNF plus M port available in G 1/4". Max inlet flow 60 l/min. The manifold material is aluminium for applications up to 210 bar or zinc plated steel for applications up to 320 bar.

TECHNICAL DATA

Max pressure	210/320 bar
Rated flow	60 l/min
Hydraulic fluid	Mineral oil DIN 51524
Fluid viscosity	10-500 mm ² /s
Fluid temperature	-25°C/75°C
Environment temperature	-25°C/60°C
Weight	1,05 Kg

PRESSURE DROP LOGIC ELEMENT

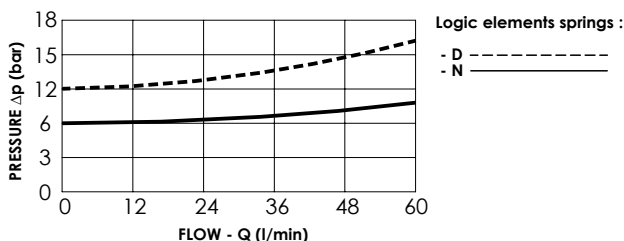

ORDERING DETAILS: SEPARATE ELEMENTS

SFLL-060-*N-19-***-***N**

*	MATERIAL TYPE
A	Steel zinc-plated (320 bar)
Z	Aluminium anodized (210 bar)

*	LOGIC ELEMENT SPRING
D	Spring setting 12 bar (CD000103)
N	Spring setting 6 bar (CD000073)

*	SETTING RANGE
N	Max setting 210 bar (CP000029)
A	Max setting 110 bar (CP000030)
B	Max setting 350 bar (CP000032)


***	PORTS
	P line T line M
G12	G 1/2" G 1/2" G 1/4"
U34	3/4"-16 UNF 3/4"-16 UNF 7/16"-20 UNF

*	VOLTAGE
	no coils
A	12 V DC
B	24 V DC

**	COILS TYPE
	no coils
HR	Hirshmann (ISO 4400 DIN 43650)
DT	Deutsch (DT04-2P)
AJ	Amp junior (AJ type)


QUICK CODE	
DESCRIPTION	CODE
SFLL-060-ZDNN-19-G12-N	SF000019
Unloading Valve	CE000873

OVERALL DIMENSIONS

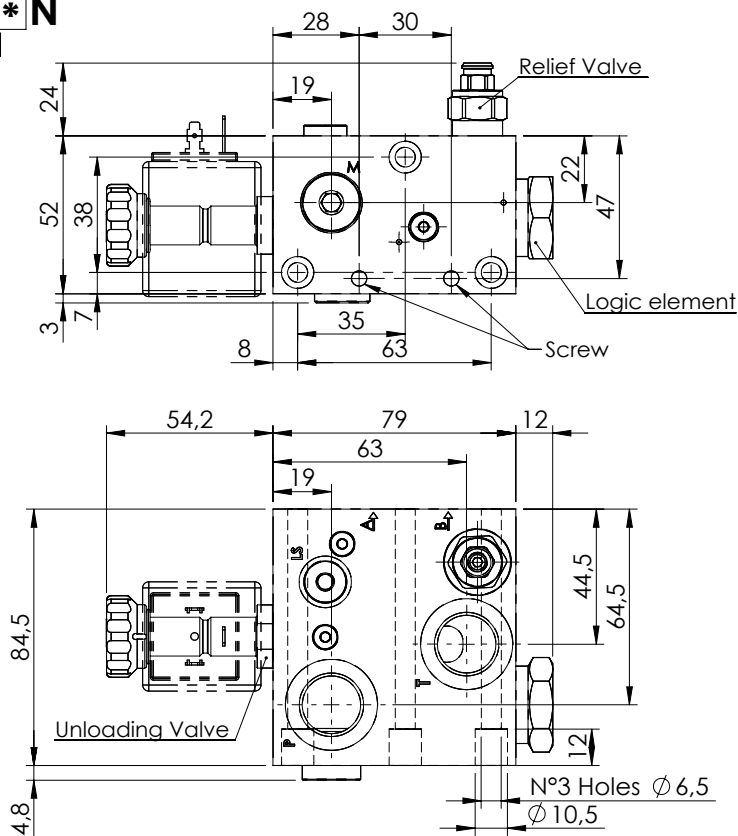


SFLL-060-ZDNN-18

**RELIEF VALVE
EXTERNAL OR INTERNAL LS**

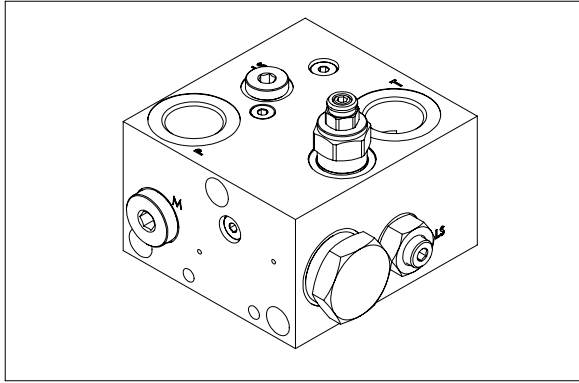

HYDRAULIC SCHEME

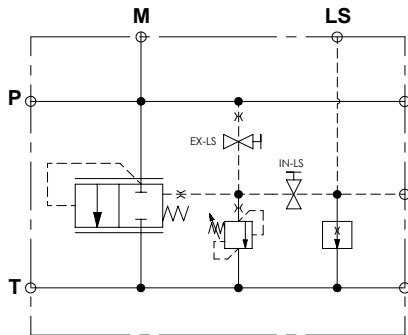


This inlet section is equipped with relief valve with adjustable setting operating on Ls signal, the adjustment is made by socket screw. It is present an unloading compensator normally closed operating with Ls signal. There are two thread ports (P, T) available in two different types G 1/2" or 3/4"-16 UNF plus M port available in G 1/4". Max inlet flow 60 l/min. The manifold material is aluminium for applications up to 210 bar or zinc plated steel for applications up to 320 bar.

TECHNICAL DATA

Max pressure	210/320 bar
Rated flow	60 l/min
Hydraulic fluid	Mineral oil DIN 51524
Fluid viscosity	10-500 mm ² /s
Fluid temperature	-25°C/75°C
Environment temperature	-25°C/60°C
Weight	1 Kg

PRESSURE DROP LOGIC ELEMENT

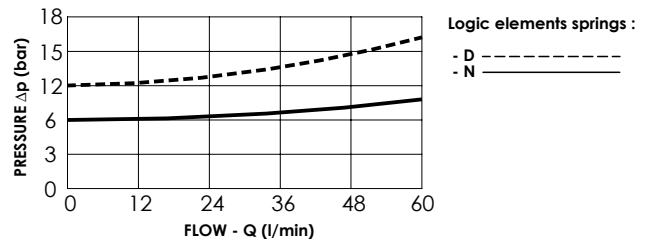


ORDERING DETAILS: SEPARATE ELEMENTS

SFLL-060-*N-18-***-N**

*	MATERIAL TYPE		
A	Steel zinc-plated (320 bar)		
Z	Aluminium anodized (210 bar)		
*	LOGIC ELEMENT SPRING		
D	Spring setting 12 bar (CD000103)		
N	Spring setting 6 bar (CD000073)		
*	SETTING RANGE		
N	Max setting 210 bar (CP000029)		
A	Max setting 110 bar (CP000030)		
B	Max setting 350 bar (CP000002)		
***	PORTS		
	P line	T line	M
G12	G 1/2"	G 1/2"	G 1/4"
U34	3/4"-16 UNF	3/4"-16 UNF	7/16"-20 UNF
	QUICK CODE		
	DESCRIPTION	CODE	
	SFLL-060-ZDNN-18-G12-N	SF000011	
	SFLL-060-ZNNN-18-G12-N	SF000031	


OVERALL DIMENSIONS

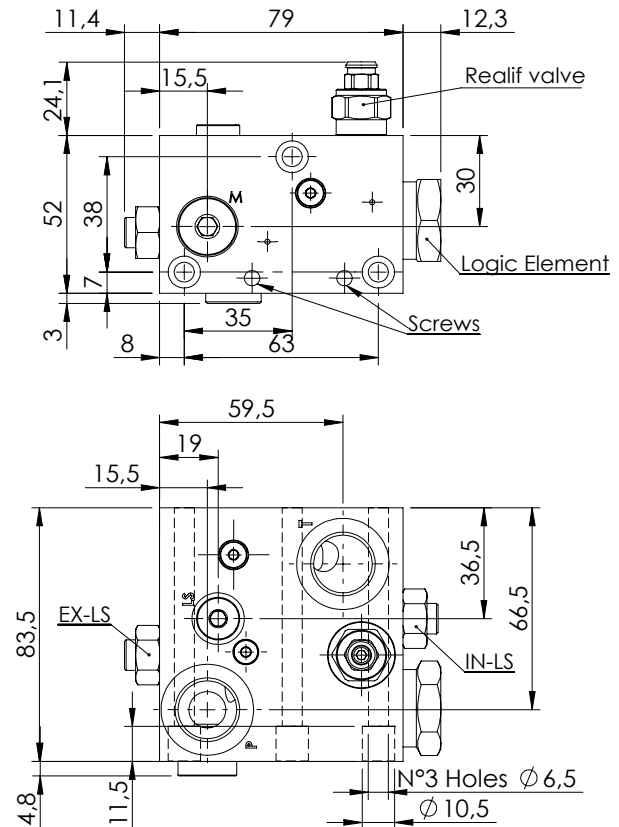

LDLP-060-NNNN

CAST-IRON MANIFOLD

In LDNS/P-030-C plug are included in the manifold

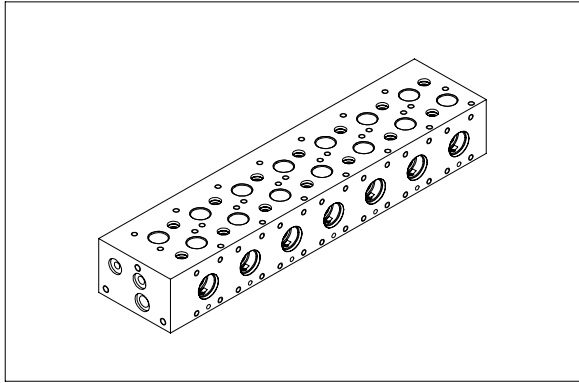

The monoblock valve can be ordered with a number of spool's section from 1 to 7, each section is equipped with side mounting holes for lever option and with treaded holes at the top for flangeable modular valve. There are also two removable plugs connecting to a T line to allow to flange special blocks.

The standard version has G 3/8" ports and can be supplied with top blocks with 9/16"-18 UNF (SAE6) or M16x1,5.

The manifold it is made with cast-iron and protected from corrosion with zinc-plating surface treatment.

The inlet face has 3 threaded holes to flange an inlet block that can be customized for each application, giving high flexibility to the project.

TECHNICAL DATA

Max pressure	320 bar
Rated flow	60 l/min
Material	Cast-iron
Surface treatment	Zinc-plated black
Weight for single section	1,9 kg
Wight for additional sections	+ 1,1 Kg each

ORDERING DETAILS: SEPARATE ELEMENTS


LDL * -060- NNNN - ** - ***

* TYPE OF MANIFOLD	
S	Series connection
P	Parallel connection
** NUMBER OF SECTION	
01	manifold with one section
02	manifold with two sections
03	manifold with three sections
04	manifold with four sections
05	manifold with five sections
06	manifold with six sections
07	manifold with seven sections

***	PORTS		
	P line	T line	M
G38	G 3/8"	G 3/8"	G 1/4"
U09	9/16"-18 UNF	9/16"-18 UNF	7/16"-20 UNF



QUICK CODE	
DESCRIPTION	CODE
LDLP-060-NNNN-01-G38	LD000183
LDLP-060-NNNN-02-G38	LD000184
LDLP-060-NNNN-03-G38	LD000185
LDLP-060-NNNN-04-G38	LD000187
LDLP-060-NNNN-05-G38	LD000188
LDLP-060-NNNN-06-G38	LD000189
LDLP-060-NNNN-07-G38	LD000190

MANIFOLD CONFIGURATIONS



LDLP-060


MONOBLOCK PRESSURE DROP

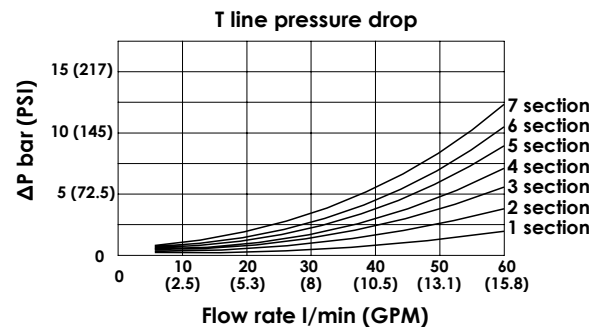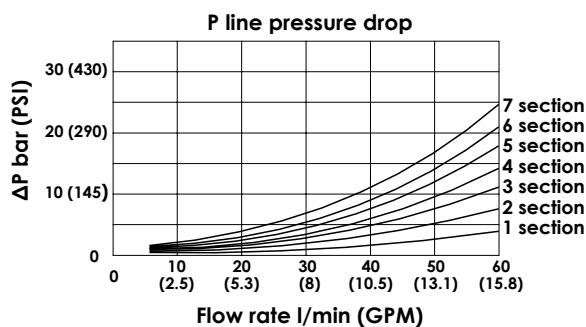

LDLP-060-NNNN



**CAST-IRON
MANIFOLD**

GAS VERSION

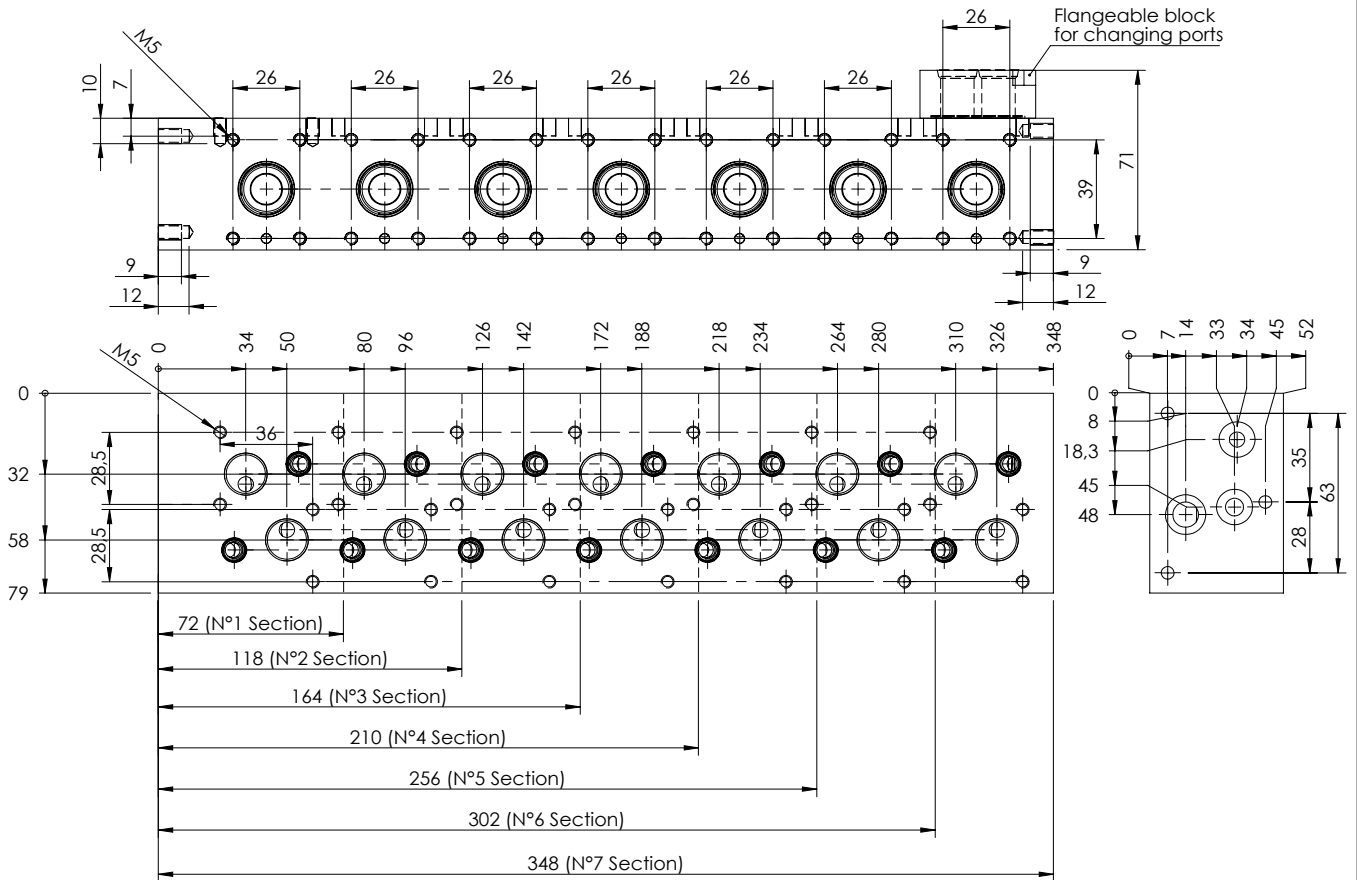

SAE VERSION

METRIC VERSION

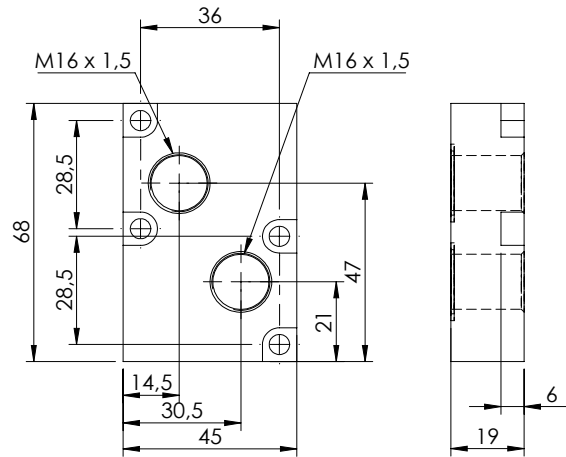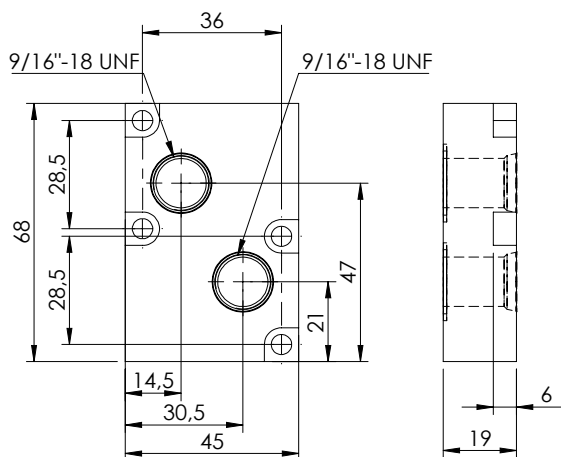

This top flangeable block transform the monoblock to a UNF version.


This top flangeable block transform the monoblock to a Metric version.

Quick code: MP000096

Quick code: MP000097

SHNE-030-LSON

30 L/MIN
SOLENOID VALVE

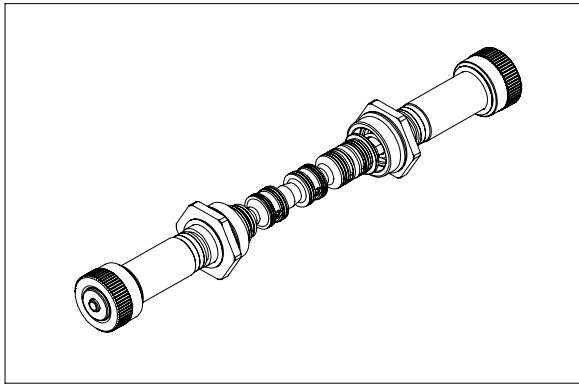

This spool group is rated for 30 lpm and for a maximum pressure of 320 bar; the spool is actuated by on off tubes and can be ordered with different hydraulic schemes. Each spools is interchangeable to give maximum flexibility and can be fit in all monoblock sections, changing spools require adequate training. The group is made by two tubes, one spool, two springs and mounting components.

TECHNICAL DATA

Max pressure	320 bar
Rated flow	30 l/min
Max excitation frequency	3 Hz
Duty cycle	100 % ED
Hydraulic fluid	Mineral oil DIN 51524
Fluid viscosity	10/500 mm ² /s
Fluid temperature	-25°C/75°C
Enviroment temperature	-25°C/60°C
Weight with one solenoid	0,12 Kg
Weight with two solenoid	0,15kg

ORDERING DETAILS: SEPARATE ELEMENTS

SH* *- 030 - LS** - ** -396 - * ** N

*	VERRIDE TYPE
N	Standard
P	Push
V	Screw

*	SECTION TYPE
E	Solenoid operated
L	Solenoid operated plus lever operated
M	Lever operated

**	ACTUATION TYPE
ON	On/Off
SS	Soft shift

**	SPOOL TYPE
...	See table n°1

*	COILS VOLTAGE
	no coils
A	12 V DC
B	24 V DC

**	COILS TYPE
	no coils
HR	Hirschmann (ISO 4400 DIN 43650)
DT	Deutshc (DT04-2P)
AJ	Amp Junior (AJ type)


QUICK CODE	
DESCRIPTION	CODE
SHNE-030-LSON-74-396	
SHNE-030-LSON-75-396	

HYDRAULIC SYMBOLS


Table n°1

SPOOL CODE	HYDRAULIC SCHEME	TRANSITORY POSITION	
74			
75			
SPOOL CODE	HYDRAULIC SCHEME	TRANSITORY POSITION	
a	b	a	b


VERRIDE TYPE

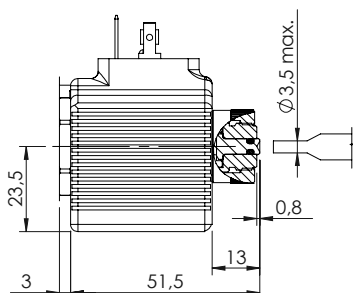

VERRIDE TYPE "N"

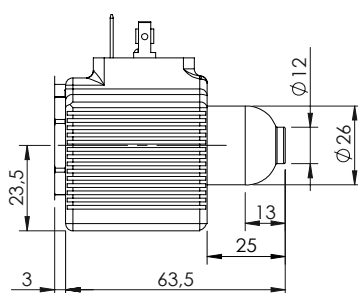

VERRIDE TYPE "P"

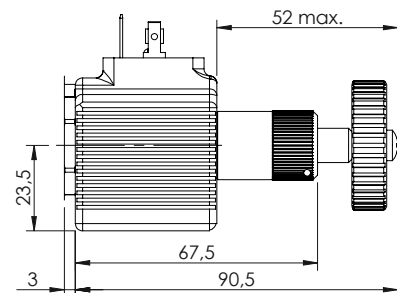


VERRIDE TYPE "V"

SHNE-030-LSON

30 L/MIN SOLENOID VALVE


PERFORMANCE LIMITS CURVES - STANDARD SECTION

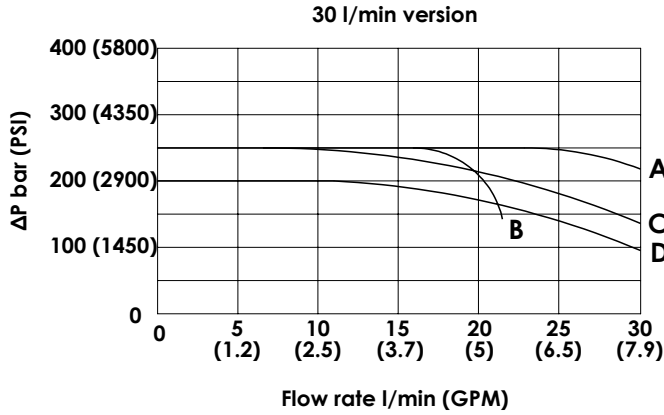

Spool type	Performance limits curve
74	A
75	A
	B
	A
	A
	A
	C
	D

The tests are carried out with hot solenoids, powered with 90 % of nominal voltage, with 50 °C fluid temperature. The fluid used is mineral oil having a viscosity of 46 mm² / s @ 40 °C. The values in the diagram refer to tests carried out with flow simultaneously in both directions (P > A, B > T). In cases of schemes 4/2 or 4/3 used with the flow in one direction only the performance can change.

PRESSURE DROP CURVES - STANDARD SECTION

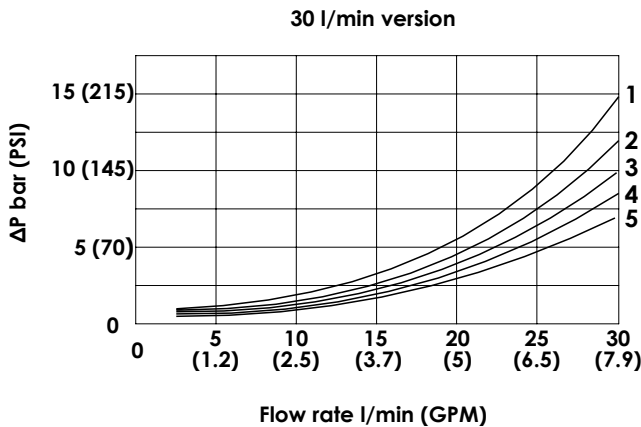


Spool type	Pressure drop curve				
	P>A	P>B	A>T	B>T	P>T
74	3	3	4	4	/
75	3	3	5	5	/
	2	2	1	1	2
	/	3	4	/	/
	/	3	5	/	/
	2	/	/	1	/
	/	3	4	/	/
	/	2	3	/	/

The diagram shows the performance limit curve of standard section. The fluid used is mineral oil viscosity 46 mm²/s at 40 °C ; the tests are performed at a 40 °C temperature

OVERALL DIMENSION - STANDARD SECTION


In case of top modular valve MA or MC type installation the coil connection can be faced to the top or to the bottom of the block. (See modular valve section)

In case of top modular valve MB, KE and KF type installation the coil connection can be faced only to the bottom of the block. (See modular valve section)

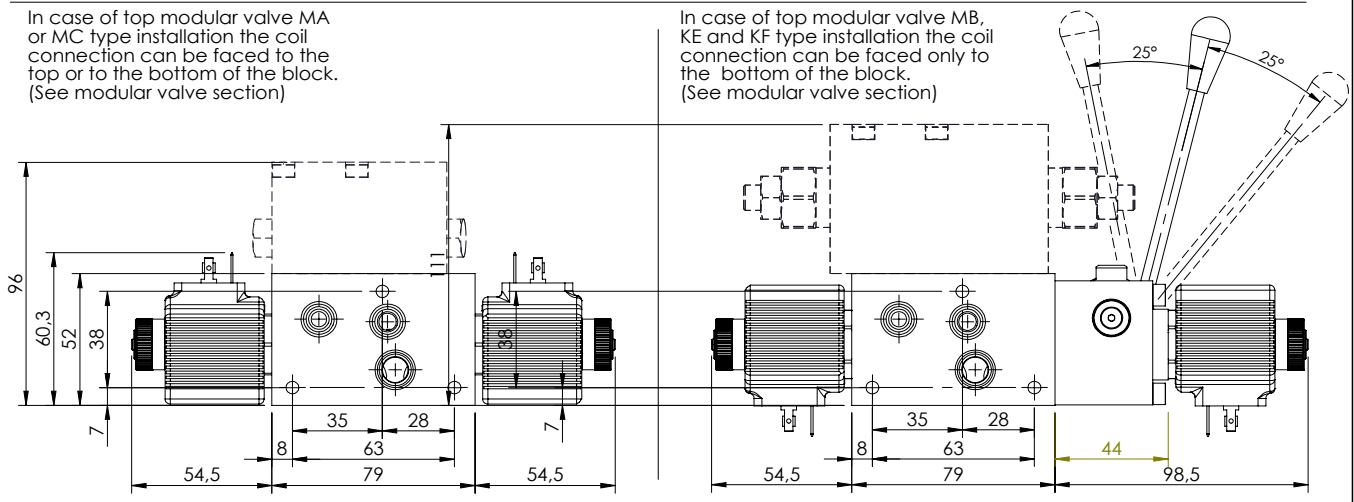

SHNE-060-LSON

60 L/MIN
SOLENOID VALVE

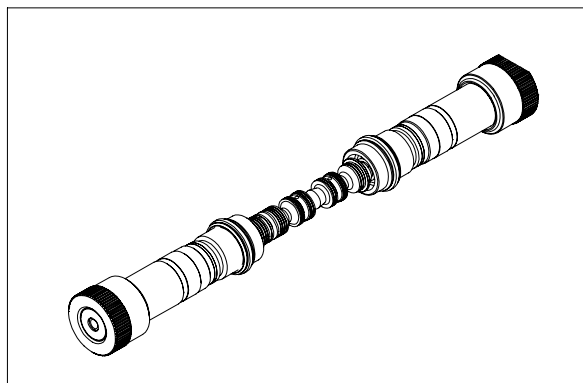

This spool group is rated for 60 lpm and for a maximum pressure of 320 bar; the spool is actuated by on off tubes and can be ordered with different hydraulic schemes. Each spools is interchangeable to give maximum flexibility and can be fit in all monoblock sections, changing spools require adequate training. The group is made by two tubes, one spool, two springs and mounting components.

TECHNICAL DATA

Max pressure	320 bar
Rated flow	60 l/min
Max excitation frequency	3 Hz
Duty cycle	100 % ED
Hydraulic fluid	Mineral oil DIN 51524
Fluid viscosity	10/500 mm ² /s
Fluid temperature	-25°C/75°C
Enviroment temperature	-25°C/60°C
Weight with one solenoid	0,2 Kg
Weight with two solenoid	0,4 kg

ORDERING DETAILS: SEPARATE ELEMENTS

SH** - 060 - LS** - ** - 396 - ** * N

*	VERRIDE TYPE
N	Standard
P	Push
V	Screw

*	SECTION TYPE
E	Solenoid operated
L	Solenoid operated plus lever operated
M	Lever operated

**	ACTUATION TYPE
ON	On/Off
SS	Soft shift

**	SPOOL TYPE
...	See table n°1

**	COILS VOLTAGE
	no coils
A	12 V DC
B	24 V DC

**	COILS TYPE
	no coils
HR	Hirschmann (ISO 4400 DIN 43650)
DT	Deutshc (DT04-2P)
AJ	Amp Junior (AJ type)


QUICK CODE	
DESCRIPTION	CODE
SHNE-060-LSON-74-396	
SHNE-060-LSON-75-396	

HYDRAULIC SYMBOLS


Table n°1

SPOOL CODE	HYDRAULIC SCHEME	TRANSITORY POSITION
74		
75		
SPOOL CODE	HYDRAULIC SCHEME	TRANSITORY POSITION
a b	a b	a b


VERRIDE TYPE

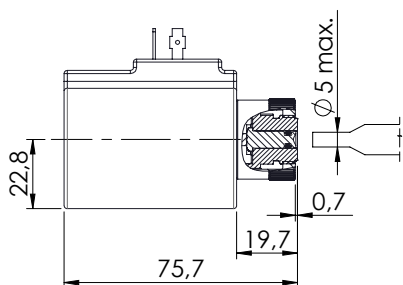

VERRIDE TYPE "N"

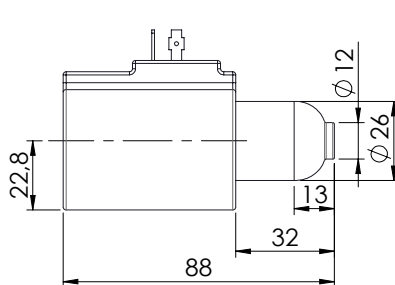


VERRIDE TYPE "P"

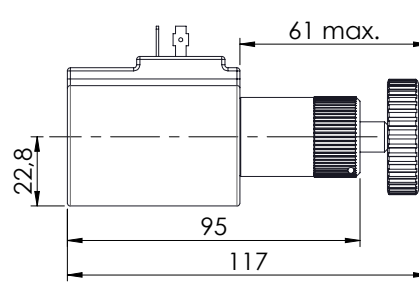

VERRIDE TYPE "V"

PERFORMANCE LIMIT CURVES - STANDARD SECTION

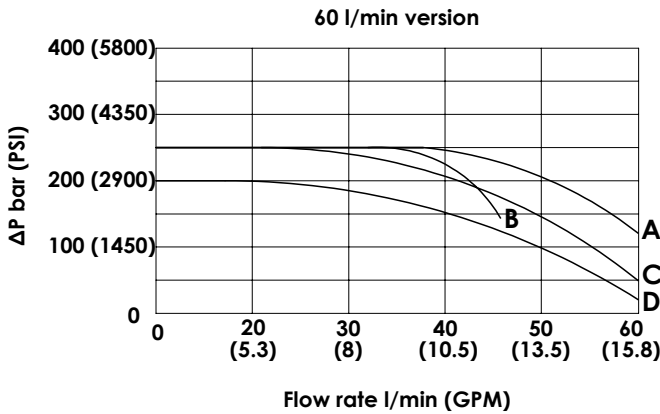


Spool type	Performance limits curve
74	A
75	A
	B
	A
	A
	A
	C
	D

The tests are carried out with hot solenoids , powered with 90 % of nominal voltage , with 50 ° C fluid temperature. The fluid used is mineral oil having a viscosity of 46 mm² / s @ 40 ° C .

The values in the diagram refer to tests carried out with flow simultaneously in both directions (P > A , B > T).

In cases of schemes 4/2 or 4/3 used with the flow in one direction only the performance can change.

PRESSURE DROP CURVES - STANDARD SECTION

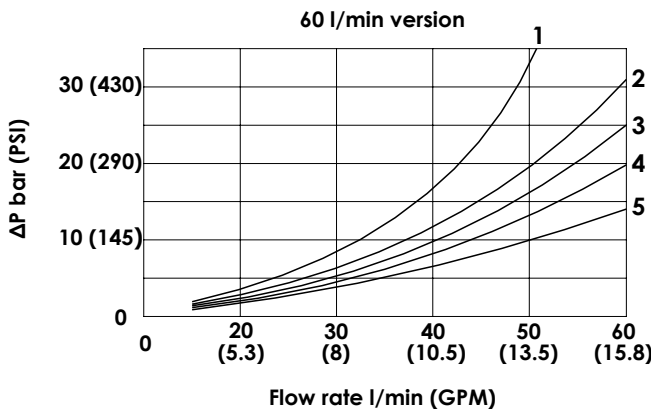



Spool type	Pressure drop curve				
	P>A	P>B	A>T	B>T	P>T
74	3	3	4	4	/
75	3	3	5	5	/
	2	2	1	1	2
	/	3	4	/	/
	/	3	5	/	/
	2	/	/	1	/
	/	3	4	/	/
	/	2	3	/	/

The diagram shows the performance limit curve of standard section. The fluid used is mineral oil viscosity 46 mm²/s at 40 ° C ; the tests are performed at a 40 ° C temperature

OVERALL DIMENSION - STANDARD SECTION


In case of top modular valve MA or MC type installation the coil connection can be faced to the top or to the bottom of the block. (See modular valve section)

In case of top modular valve MB, KE and KF type installation the coil connection can be faced only to the bottom of the block. (See modular valve section)

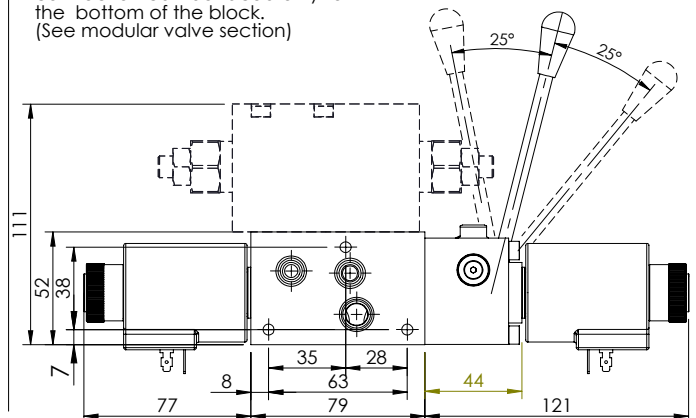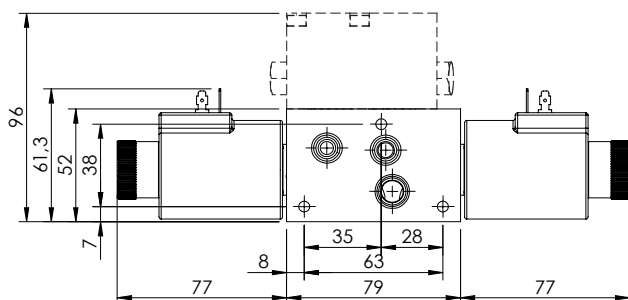

SHNE-050-LSPR

50 L/MIN
PROPORTIONAL
SOLENOID VALVE

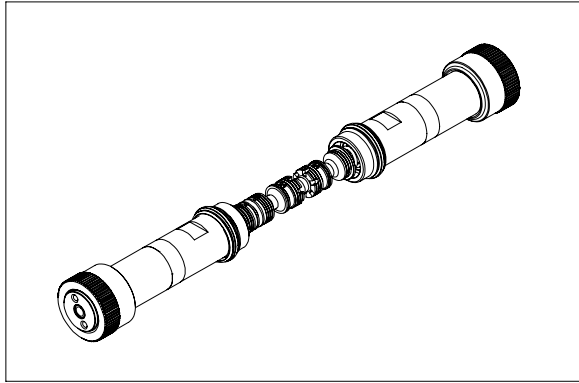

This spool group is rated for 50 lpm and for a maximum pressure of 320 bar; the spool is actuated by proportional tubes and can be ordered with different hydraulic schemes. Each spools is interchangeable to give maximum flexibility and can be fit in all monoblock sections, changing spools require adequate training. The group is made by two tubes, one spool, two springs and mounting components.

TECHNICAL DATA

Max pressure	320 bar
Rated flow	50 l/min
Max excitation frequency	3 Hz
Duty cycle	100 % ED
Max current	1.76A (12 V dc) 0.88A (24 V dc)
Hydraulic fluid	Mineral oil DIN 51524
Fluid viscosity	10/500 mm ² /s
Fluid temperature	-25°C/75°C
Enviroment temperature	-25°C/60°C
Weight with one solenoid	0,5 Kg
Weight with two solenoid	0,7 kg

ORDERING DETAILS: SEPARATE ELEMENTS

SH** - 0** - LSPR - ** - 396 - ***N

*	VERRIDE TYPE
N	Standard
P	Push
V	Screw

*	SECTION TYPE
E	Solenoid operated
L	Solenoid operated plus lever operated
M	Lever operated

**	SPOOL FLOW
20	20 l/min at 12 bar - 10 l/min at 6 bar
35	35 l/min at 12 bar - 20 l/min at 6 bar
50	50 l/min at 12 bar - 30 l/min at 6 bar

**	ROPORTIONAL TYPE
...	See table n°1

*	COILS VOLTAGE
	no coils
A	12 V DC
B	24 V DC

**	COILS TYPE
	no coils
HR	Hirschmann (ISO 4400 DIN 43650)
DT	Deutshc (DT04-2P)
AJ	Amp Junior (AJ type)

QUICK CODE	
DESCRIPTION	CODE
SHNE-030-LSPR-77-396	
SHNE-030-LSPR-78-396	

TECHNICAL FEATURES

Proportionl type	Spool flow	Rated flow with 12 bar ΔP	Maximum flow	Max. operating pressure
All	20	15	20	320
All	35	30	35	320
All	50	45	50	320


Proportionl type	Spool flow	Rated flow with 6 bar ΔP	Maximum flow	Max. operating pressure
All	20	10	15	320
All	35	20	25	320
All	50	30	35	320

HYDRAULIC SYMBOLS

Table n°1

SPOOL CODE	HYDRAULIC SCHEME	TRANSITORY POSITION
77		
78		


VERRIDE TYPE

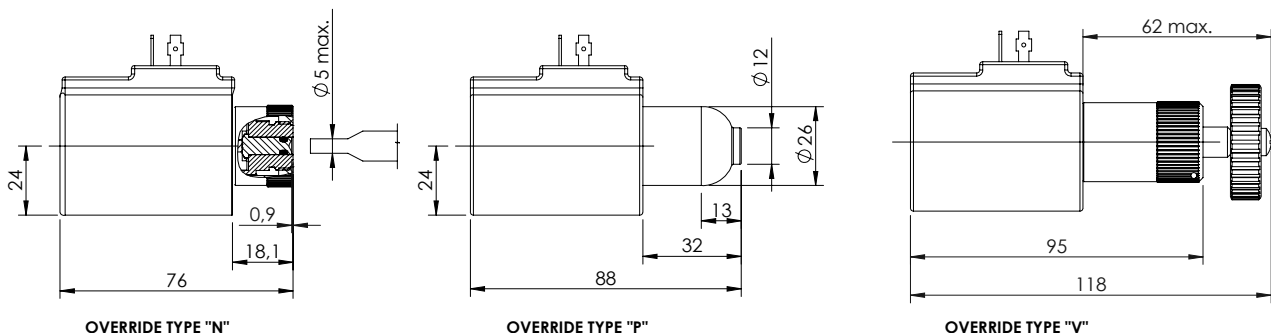


SHNE-050-LSPR

50 L/MIN
PROPORTIONAL
SOLENOID VALVE


FLOW DIAGRAM - 050

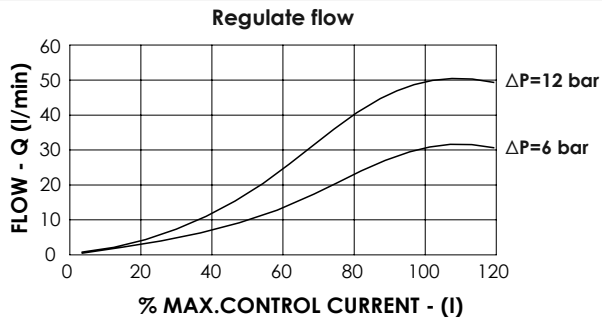


COMPESATION DIAGRAM - 050

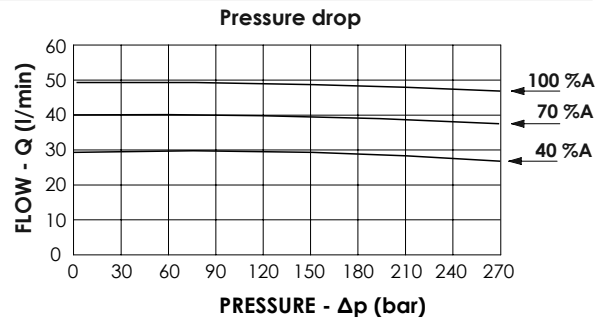


FLOW DIAGRAM - 035

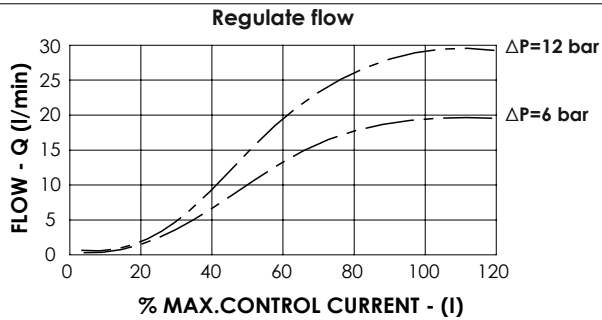


COMPENSATION DIAGRAM - 035

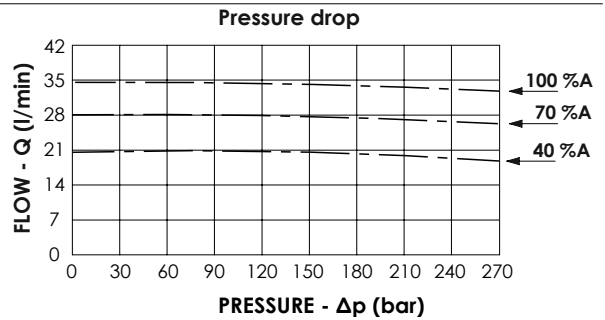

FLOW DIAGRAM - 020

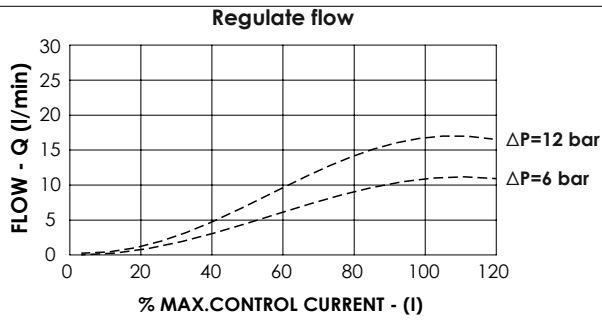

COMPENSATION DIAGRAM - 020

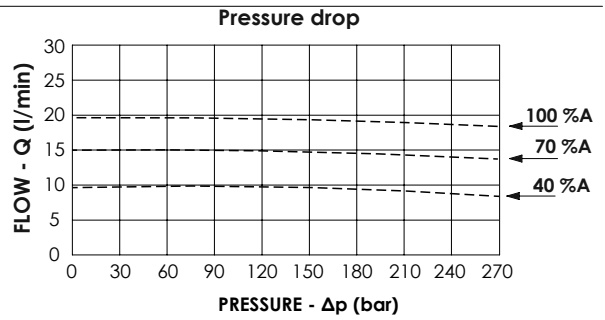


Spool type:

- 10 -----
- 20 -----
- 30 -----


In the diagram shows the performance limits curves of standard section. The fluid used is mineral oil viscosity 46 mm²/s at 40 °C ; the tests were performed at a 40 °C temperature

OVERALL DIMENSION - STANDARD SECTION


In case of top modular valve MA or MC type installation the coil connection can be faced to the top or to the bottom of the block. (See modular valve section)

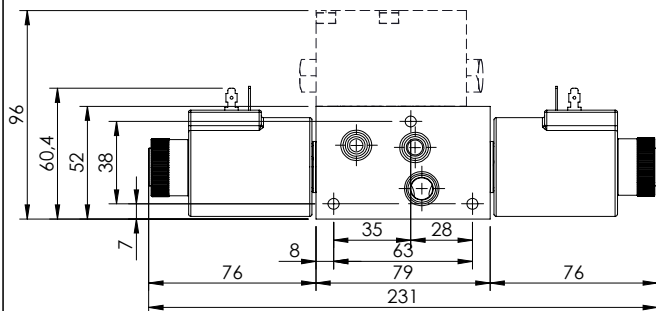

In case of top modular valve MB, KE and KF type installation the coil connection can be faced only to the bottom of the block. (See modular valve section)

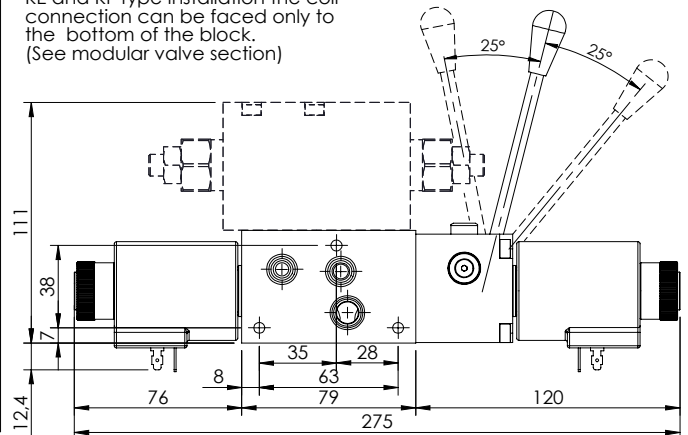

MANUAL LEVER

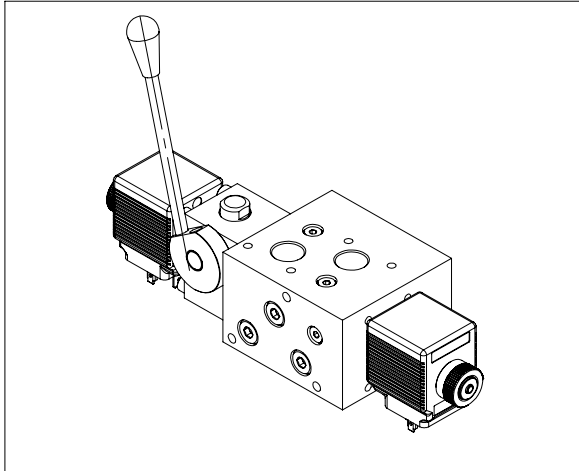


The lever option allow to operate manually the spool and can be ordered for all hydraulic schemes; in the standard version it is installed between monoblock and B port side coil. The lever is normally installed on the monoblock port side but can be installed also rotated of 180°; in each of these two positions the lever can be mounted vertical or horizontal simply removing the lever and reinstalling. The lever is not engaged during solenoid operation and doesn't move when a coil is energized.

TECHNICAL DATA

Max pressure	210/320 bar
Max pressure in line type	210 bar
Rated flow	30/60 l/min
Insertion	100 % ED
Weight more than standard	2 Kg
Weight more than standard	2,5 kg


OVERALL DIMENSIONS/ LEVER FOR 30 L/MIN SECTION

The lever option is designed to activate the spool manually, when the lever is pulled the flow is delivered from the port close to the lever, when it is pushed the flow is delivered from the port opposite to the lever. The standard operation deliver full flow, in case of override operation it is possible to reduce the maximum stroke and consequently the speed, for this option contact AFT sales network. The lever can be easily positioned vertical or horizontal by unscrewing it from the rotating shaft.

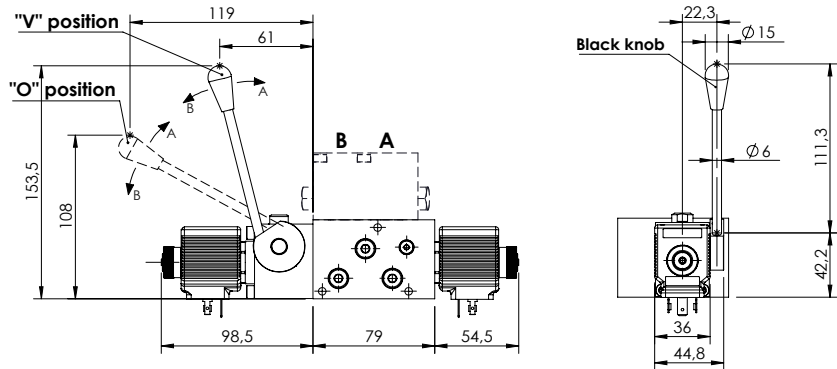


OVERALL DIMENSIONS/ LEVER FOR 60 L/MIN SECTION

The lever option is designed to activate the spool manually, when the lever is pulled the flow is delivered from the port close to the lever, when it is pushed the flow is delivered from the port opposite to the lever. The standard operation deliver full flow, in case of override operation it is possible to reduce the maximum stroke and consequently the speed, for this option contact AFT sales network. The lever can be easily positioned vertical or horizontal by unscrewing it from the rotating shaft.

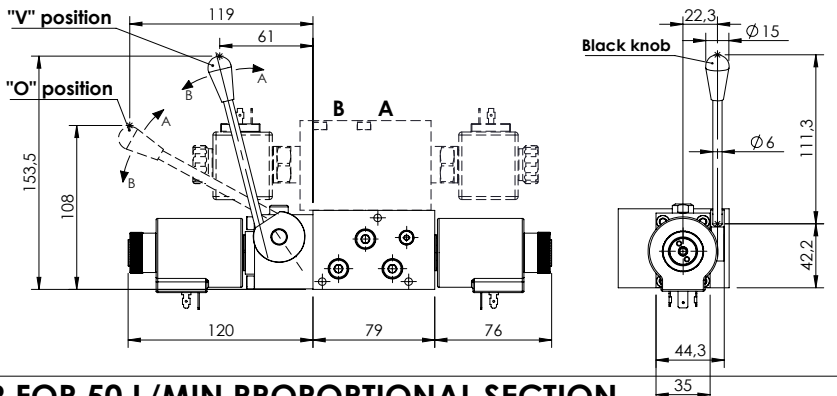

OVERALL DIMENSION/ LEVER FOR 50 L/MIN PROPORTIONAL SECTION


The lever option is designed to activate the spool manually, when the lever is pulled the flow is delivered from the port close to the lever, when it is pushed the flow is delivered from the port opposite to the lever. The standard operation deliver full flow, in case of override operation it is possible to reduce the maximum stroke and consequently the speed, for this option contact AFT sales network. The lever can be easily positioned vertical or horizontal by unscrewing it from the rotating shaft.

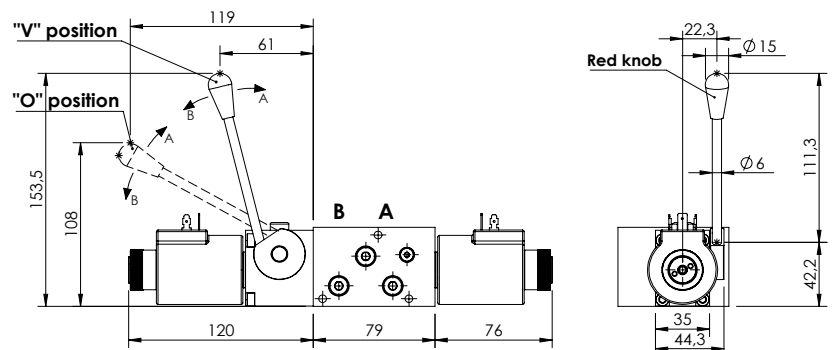

EBL series - MOUNTING PART SECTION



MOUNTING SCREW


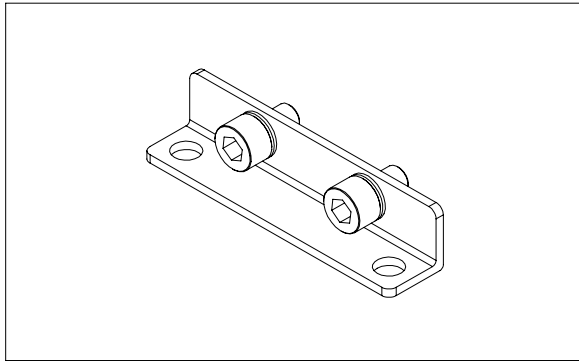


These parts are used to mount the directional valve on the application or to install modular valves and inlet section on the monoblock.

TECHNICAL DATA


Screw type	ISO 4762
Thread type	coarse thread
Standard screw	resistance class 8.8
High resistance screw	resistance class 12.9
Standard screw treatment	zinc-plated (white)
High res. screw treatment	Anodized (black)

MOUNTING BRACKETS

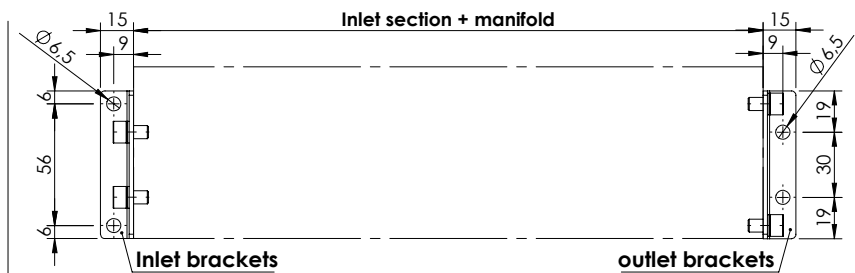


Mounting brackets	Screw length (mm)	Reference	Tightening Torque
PV000371	M6x10	AV000015 + PR000129	6 - 7 N/m

MOUNTING INLET SECTION

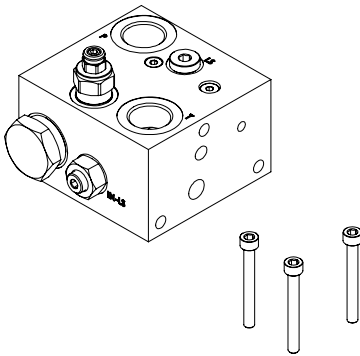

Inlet section	Screw length (mm)	Reference	Tightening Torque
SF000011	M6x80	AV000073	6 - 7 N/m
SF000019	M6x80	AV000073	6 - 7 N/m
SF000042	M6x75	PE000418	6 - 7 N/m
SF000045	M6x75	PE000418	6 - 7 N/m

FIXING STACKING MODULES



Flangiabe valve	Screw length (mm)	Reference	Tightening Torque
MP	M5x16	AV000035	3 - 4 N/m
MA, MC and MB	M5x45	PE000148	3 - 4 N/m
KE and MF	M5x60	AV000016	3 - 4 N/m




1800-OILSOL
1800-645765

<https://oilsolutions.com.au/>

sales@oilsolutions.com.au

EBP series

**MONOBLOCK
PRE-COMPENSATED
LOAD SENSING VALVE
ON-OFF OR PROPORTIONAL**

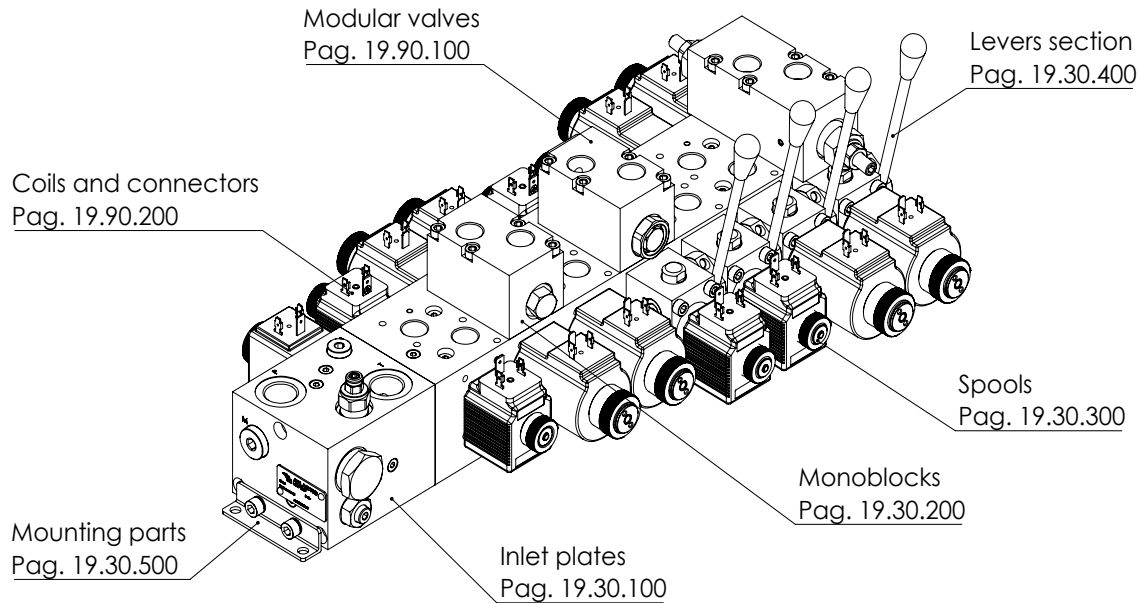

FEATURES

- Compact dimensions
- Low weight
- Custom spools
- Custom inlet blocks
- LS line on each spool section
- LS compensator on each spool section
- Sandwich valves for extra functions
- Cast iron monoblock and aluminum inlet block for standard applications
- High resistance cast iron monoblock and steel inlet block for high pressure systems
- Optional levers for manual operation
- No leak risk between sections
- Spools not under rod tension
- Zinc plated/anodized components for corrosion resistance

SPECIFICATION \ DESCRIPTION

MAXIMUM OPERATING PRESSURE	Steel inlet block: 320 bar (4600 PSI) Aluminium inlet block: 210 bar (3045 PSI)
MAXIMUM TANK PRESSURE	20 bar (290 PSI)
RATED FLOW	030 series: 30 l/min (7.9 GPM) 060 series: 60l/min (15.8 GPM)
COIL POWER	030 series: 26 W 060 series: 33 W
VOLTAGE	12 V dc, 24 VDC, others on request
COIL CONNECTOR	DIN43650, AMP Junior, Deutsch DT04
PORTS	Inlet: G1/2", 1/2 JIS, 7/8-14 UNF-2B (SAE#10) Outlet: G3/8", 3/8 JIS, 3/4-16 UNF-2B (SAE#8)
OPERATING TEMPERATURE	NBR (ISO 1629) seals: -30, + 80 °C FKM (ISO 1629) seals: -20, +110 °C
FILTRATION	ISO 4406 17/14 or better
MOUNTING POSITION	No restrictions
MATERIAL	Spool body: cast iron Spool: Hardened and grounded steel Inlet block: Aluminium or steel
SURFACE TREATMENT	Steel: zinc plating Aluminium: anodization

EBN series is a new directional load sensing pre-compesated valve that has innovative features in terms of performance, dimension, manufacturing reliability and customization. The valve consists in an inlet block flanged to a monoblock with spools. This construction gives the advantages of high flexibility in inlet block schemes, combined with the reliability and simplicity of monoblock spool valve construction, eliminating the risk of spools blocking due to overtightening of tie rods or the risk of leakage between sections. The spool monoblock is a 2 or 3 position, 4 ways, direct acting solenoid operated type. All sections have threaded ports at the top and removable plugs for tank connections to allow the installation of flanged blocks with additional functions like crossover reliefs, reliefs to tank, relief and anticavitations, counterbalance valves, P.O. checks, flow restrictors and flow regulators. All sections are equipped with standard push button override and they can be equipped with lever for manual use.

HOW ORDER IT

To order the separate parts please refer to each catalogue page.


To order an assembled block, contact AFT sales network specifying the part numbers following page 19.90.900 path.

For special versions please contact AFT sales network.


EBP series - INLET SECTION

SFPL-060-ZNNN-16

**P, T PORTS
M PORTS**

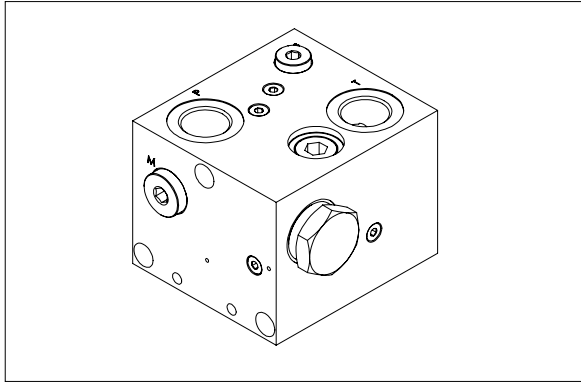

HYDRAULIC SCHEME

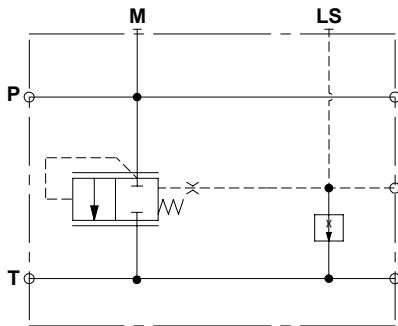


This inlet section is equipped with two thread ports (P,T) available in two different types G 1/2" or 3/4"-16 UNF plus a third threaded port M for pressure measuring available in G 1/4" or 7/16"-20. The manifold material is aluminium for applications up to 210 bar or zinc plated steel for applications up to 320 bar.

TECHNICAL DATA

Max pressure	210/320 bar
Rated flow	60 l/min
Hydraulic fluid	Mineral oil DIN 51524
Fluid viscosity	10-500 mm ² /s
Fluid temperature	-25°C/75°C
Environment temperature	-25°C/60°C
Weight	1,2 Kg

PRESSURE DROP LOGIC ELEMENT

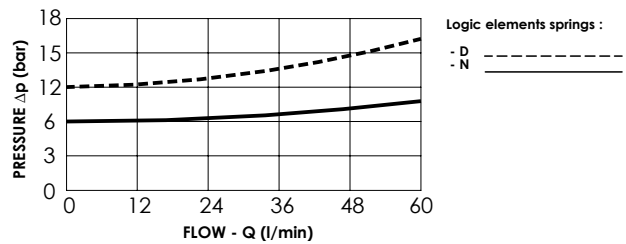

ORDERING DETAILS: SEPARATE ELEMENTS

SFPL-060- * * NN-16 - * * * -N


*	MATERIAL TYPE
A	Steel zinc-plated (320 bar)
Z	Aluminium anodized (210 bar)

*	LOGIC ELEMENT SPRING
D	Spring setting 12 bar (CD000103)
N	Spring setting 6 bar (CD000073)

***	PORTS		
	P line	T line	M
G12	G 1/2"	G 1/2"	G 1/4"
U34	3/4"-16 UNF	3/4"-16 UNF	7/16"-20 UNF

QUICK CODE	
DESCRIPTION	CODE
SFPL-060-ZNNN-16-G12-N	SF000048


OVERALL DIMENSIONS

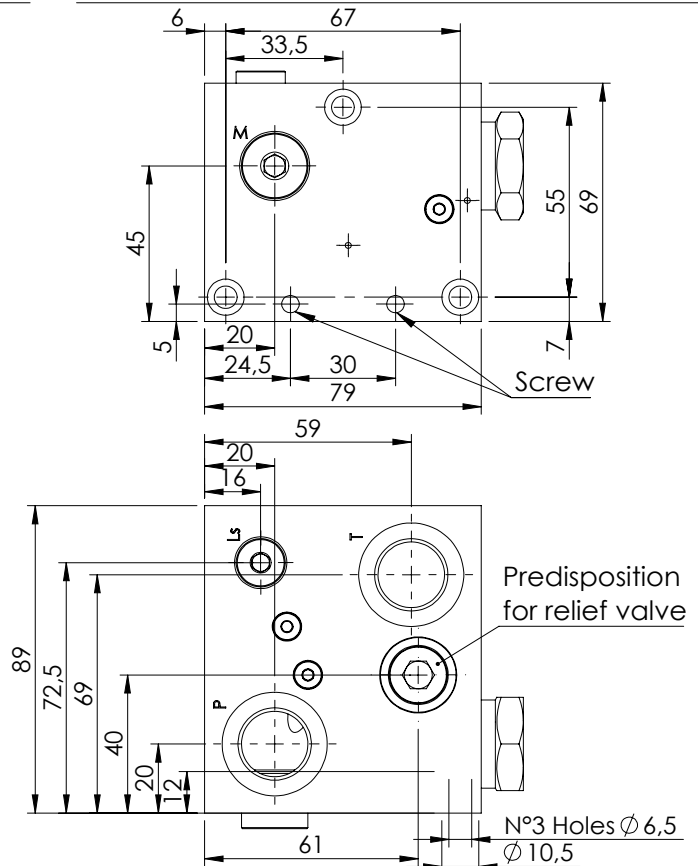


EBP series - INLET SECTION

SFPL-060-ZNNN-17

**RELIEF VALVE
M PORTS**

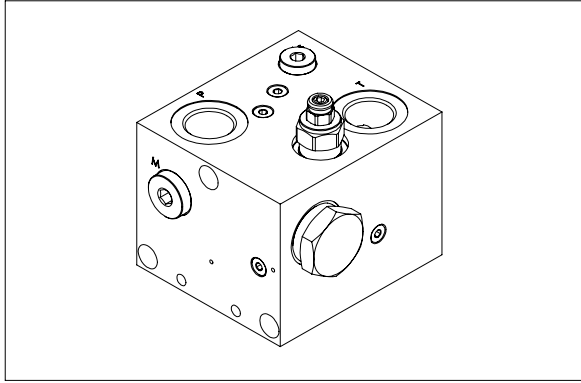

HYDRAULIC SCHEME

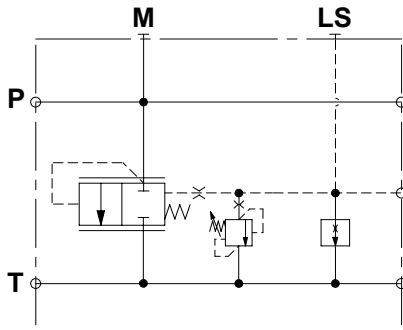


This inlet section is equipped with relief valve with adjustable setting operating on Ls signal, the adjustment is made by socket screw. This inlet section is equipped with two thread ports (P,T) available in two different types G 1/2" or 3/4"-16 UNF plus a third threaded port M for pressure measuring available in G 1/4" or 7/16"-20. The manifold material is aluminium for applications up to 210 bar or zinc plated steel for applications up to 320 bar.

TECHNICAL DATA

Max pressure	210/320 bar
Rated flow	60 l/min
Hydraulic fluid	Mineral oil DIN 51524
Fluid viscosity	10-500 mm ² /s
Fluid temperature	-25°C/75°C
Environment temperature	-25°C/60°C
Weight	1,3 Kg

PRESSURE DROP LOGIC ELEMENT

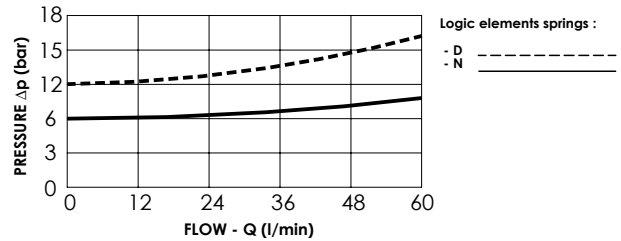

ORDERING DETAILS: SEPARATE ELEMENTS

SFPL-060-*N-17-***-N**

*	MATERIAL TYPE
A	Steel zinc-plated (310 bar)
Z	Aluminium anodized (210 bar)


*	LOGIC ELEMENT SPRING
D	Spring setting 12 bar (CD000103)
N	Spring setting 6 bar (CD000073)

*	SETTING RANGE
N	Max setting 210 bar (CP000029)
A	Max setting 110 bar (CP000030)
B	Max setting 350 bar (CP000002)

***	PORTS		
	P line	T line	M
G12	G 1/2"	G 1/2"	G 1/4"
U34	3/4"-16 UNF	3/4"-16 UNF	7/16"-20 UNF

QUICK CODE	
DESCRIPTION	CODE
SFPL-060-ZNNN-17-G12-N	SF000047


OVERALL DIMENSIONS

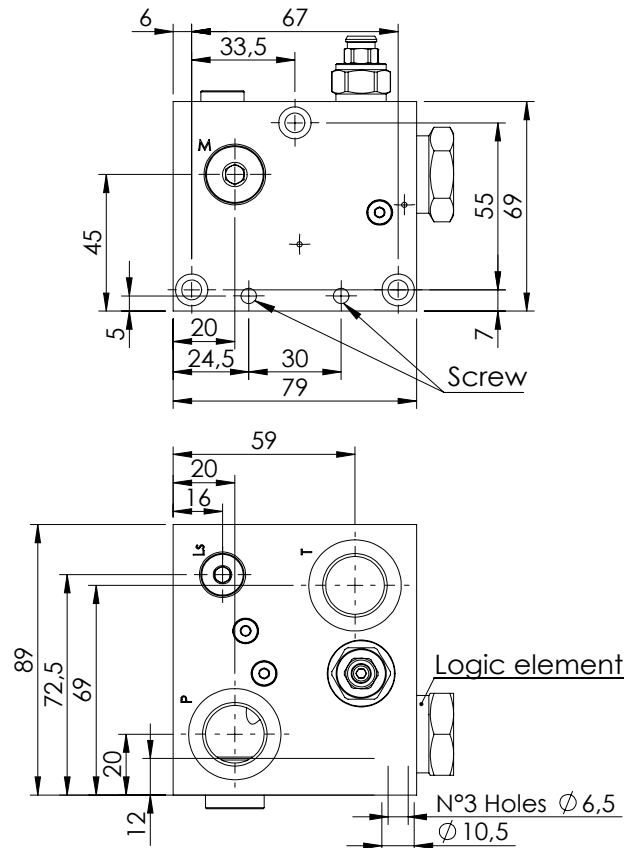


EBP series - INLET SECTION

SFPL-060-ZNNN-19

**RELIEF VALVE
UNLOADING VALVE**

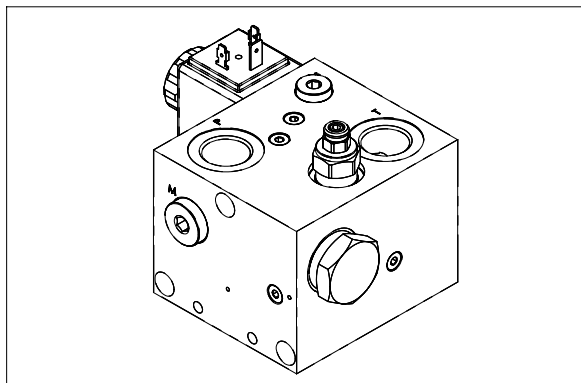

HYDRAULIC SCHEME

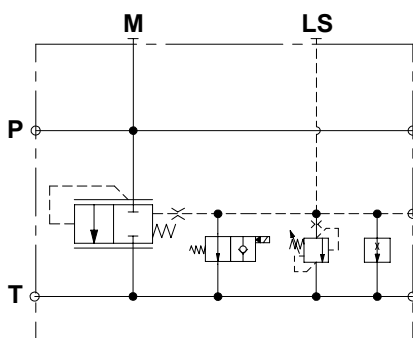


This inlet section is equipped with relief valve with adjustable setting operating on Ls signal, the adjustment is made by socket screw. It is present an unloading solenoid valve normally open with emergency operating on Ls signal. There are two thread ports (P, T) available in two different types G 1/2" or 3/4"-16 UNF plus M port available in G 1/4". Max inlet flow 60 l/min. The manifold material is aluminium for applications up to 210 bar or zinc plated steel for applications up to 320 bar.

TECHNICAL DATA

Max pressure	210/320 bar
Rated flow	60 l/min
Hydraulic fluid	Mineral oil DIN 51524
Fluid viscosity	10-500 mm ² /s
Fluid temperature	-25°C/75°C
Environment temperature	-25°C/60°C
Weight	1,4 Kg

PRESSURE DROP LOGIC ELEMENT

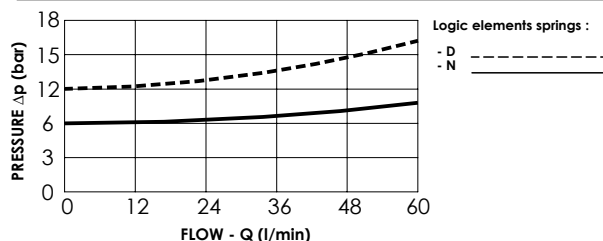


ORDERING DETAILS: SEPARATE ELEMENTS

SFPL-060-*N-19-***-***N**

*	MATERIAL TYPE		
A	Steel zinc-plated	(320 bar)	
Z	Aluminium anodized	(210 bar)	
*	LOGIC ELEMENT SPRING		
D	Spring setting	12 bar (CD000103)	
N	Spring setting	6 bar (CD000073)	
*	SETTING RANGE		
N	Max setting	210 bar (CP000029)	
A	Max setting	110 bar (CP000030)	
B	Max setting	350 bar (CP000002)	
***	PORTS		
	P line	T line	M
G12	G 1/2"	G 1/2"	G 1/4"
U34	3/4"-16 UNF	3/4"-16 UNF	7/16"-20 UNF
*	VOLTAGE		
	no coils		
A	12 V DC		
B	24 V DC		
**	COILS TYPE		
	no coils		
HR	Hirshmann (ISO 4400 DIN 43650)		
DT	Deutsch (DT04-2P)		
AJ	Amp junior (AJ type)		
	QUICK CODE		
	DESCRIPTION	CODE	
	SFPL-060-ZNNN-19-G12-N	SF000046	
	Unloading valve	CE000873	


OVERALL DIMENSIONS

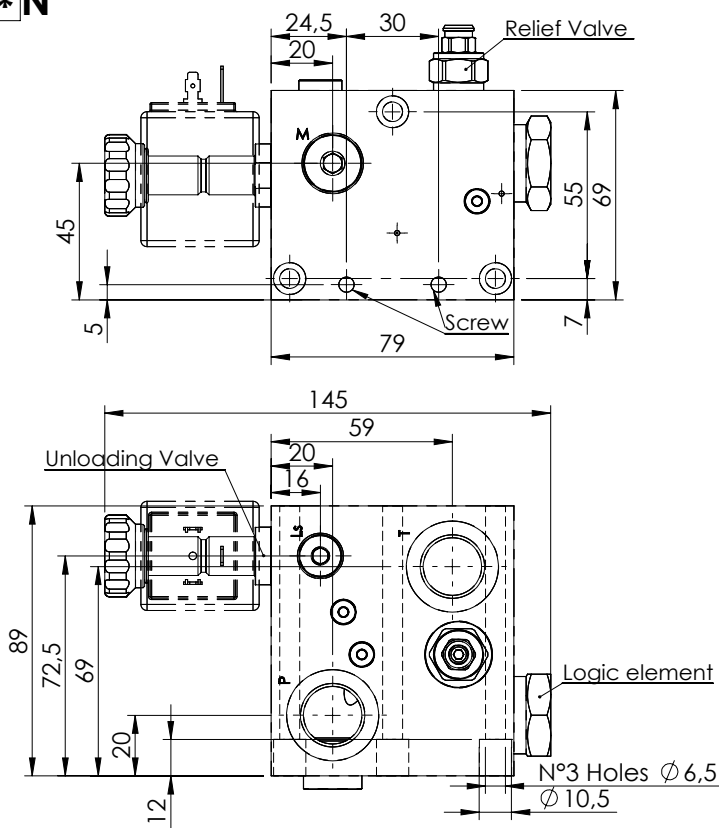

EBP series - INLET SECTION


SFPL-060-ZNNN-20

**RELIEF VALVE
UNLOADING VALVE WITH
EXTERNAL OR INTERNAL LS**

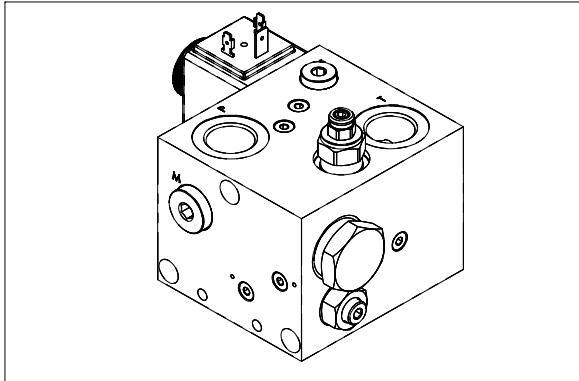

This inlet section is equipped with relief valve with adjustable setting operating on Ls signal, the adjustment is made by socket screw. It is present an unloading compensator normally closed operating with Ls signal. There are two thread ports (P, T) available in two different types G 1/2" or 3/4"-16 UNF plus M port available in G 1/4". Max inlet flow 60 l/min. The manifold material is aluminium for applications up to 210 bar or zinc plated steel for applications up to 320 bar.


HYDRAULIC SCHEME

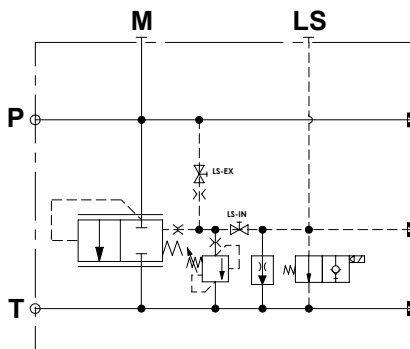

TECHNICAL DATA

Max pressure	210/320 bar
Rated flow	60 l/min
Hydraulic fluid	Mineral oil DIN 51524
Fluid viscosity	10-500 mm ² /s
Fluid temperature	-25°C/75°C
Environment temperature	-25°C/60°C
Weight	1,4 Kg

PRESSURE DROP LOGIC ELEMENT

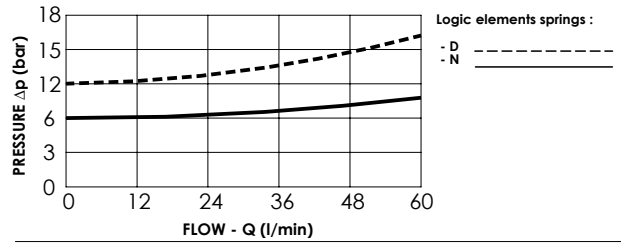


ORDERING DETAILS: SEPARATE ELEMENTS


SFPL-060-*N-20-***-***N**

* MATERIAL TYPE	
A	Steel zinc-plated (320 bar)
Z	Aluminium anodized (210 bar)
* LOGIC ELEMENT SPRING	
D	Spring setting 12 bar (CD000103)
N	Spring setting 6 bar (CD000073)
* SETTING RANGE	
N	Max setting 210 bar (CP000029)
A	Max setting 110 bar (CP000030)
B	Max setting 350 bar (CP000002)
*** PORTS	
	P line T line M
G12	G 1/2" G 1/2" G 1/4"
U34	3/4"-16 UNF 3/4"-16 UNF 7/16"-20 UNF
* VOLTAGE	
	no coils
A	12 V DC
B	24 V DC
** COILS TYPE	
	no coils
HR	Hirshmann (ISO 4400 DIN 43650)
DT	Deutsch (DT04-2P)
AJ	Amp junior (AJ type)
QUICK CODE	
DESCRIPTION	CODE
SFPL-060-ZNNN-20-G12-N	SF000041
Unloading valve	CE000873

OVERALL DIMENSIONS

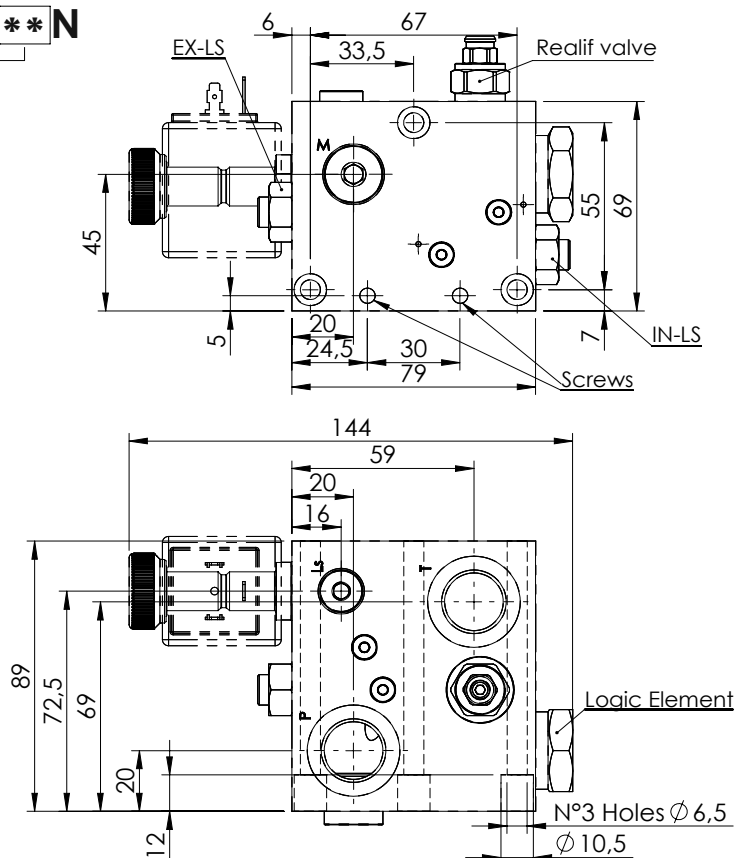

In LDPP/S-060-C plug are included in the manifold

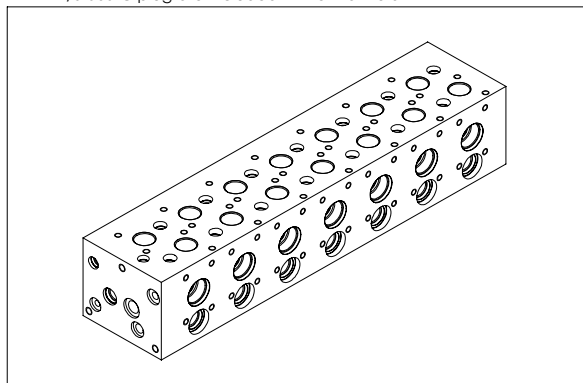

The manifold's valve can be ordered with 3 types of ports for connection nipples G 3/8" 9/16"-18 UNF (SAE6) and M16x1,5. Standard version is G 3/8" for other type of ports we will mounting flangiabe elemtens it change G 3/8" to 9/16"-18 UNF (SAE6) or M16x1,5 (can look that in dimension drawing). Manifold it's made in cast-iron with zinc-plated (black) surface treatment with sealant. It isn't a modular block for reduce to minimun the leakage through the section and also for haven't problem with screw torque. Also can easely open, removing plug, extra T connection for different kind of use such as modular valve flangiabe on distributor.

TECHNICAL DATA

Max pressure	320 bar
Rated flow	60 l/min
Material	Cast-iron
Surface treatment	Zinc-plated black
Weight for single section	2,5 kg
Wight for additional sections	+ 1,5 Kg each

ORDERING DETAILS: SEPARATE ELEMENTS

LDP * - 060-NNNN - ** - ***


*	TYPE OF MANIFOLD
S	Series connection
P	Parallel connection

**	NUMBER OF SECTION
01	manifold with one section
02	manifold with two sections
03	manifold with three sections
04	manifold with four sections
05	manifold with five sections
06	manifold with six sections
07	manifold with seven sections

***	PORTS		
	P line	T line	M
G38	G 3/8"	G 3/8"	G 1/4"
U09	9/16"-18 UNF	9/16"-18 UNF	7/16"-20 UNF



QUICK CODE	
DESCRIPTION	CODE
LDPP-060-NNNN-01-G12	LD000289
LDPP-060-NNNN-02-G12	LD000293
LDPP-060-NNNN-03-G12	LD000292
LDPP-060-NNNN-04-G12	LD000291
LDPP-060-NNNN-05-G12	LD000290
LDPP-060-NNNN-06-G12	LD000279
LDPP-060-NNNN-07-G12	LD000284

MANIFOLD CONFIGURATIONS



LDPP-060


MONOBLOCK PRESSURE DROP

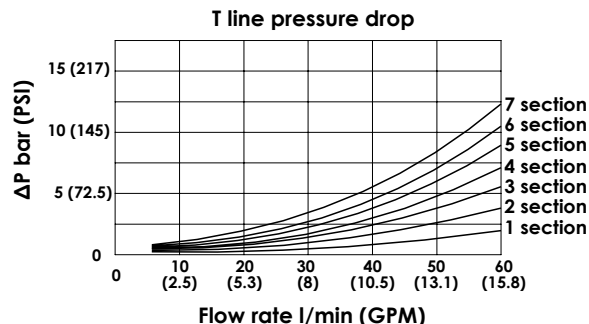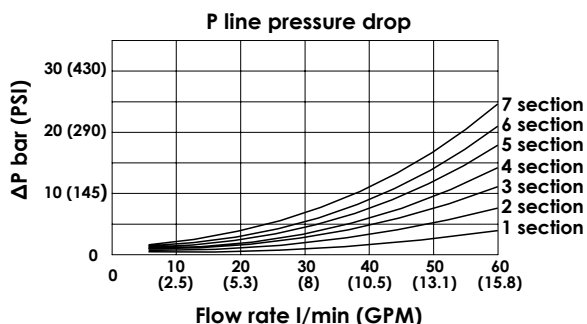

LDPP-060-NNNN



**CAST-IRON
MANIFOLD**

GAS VERSION

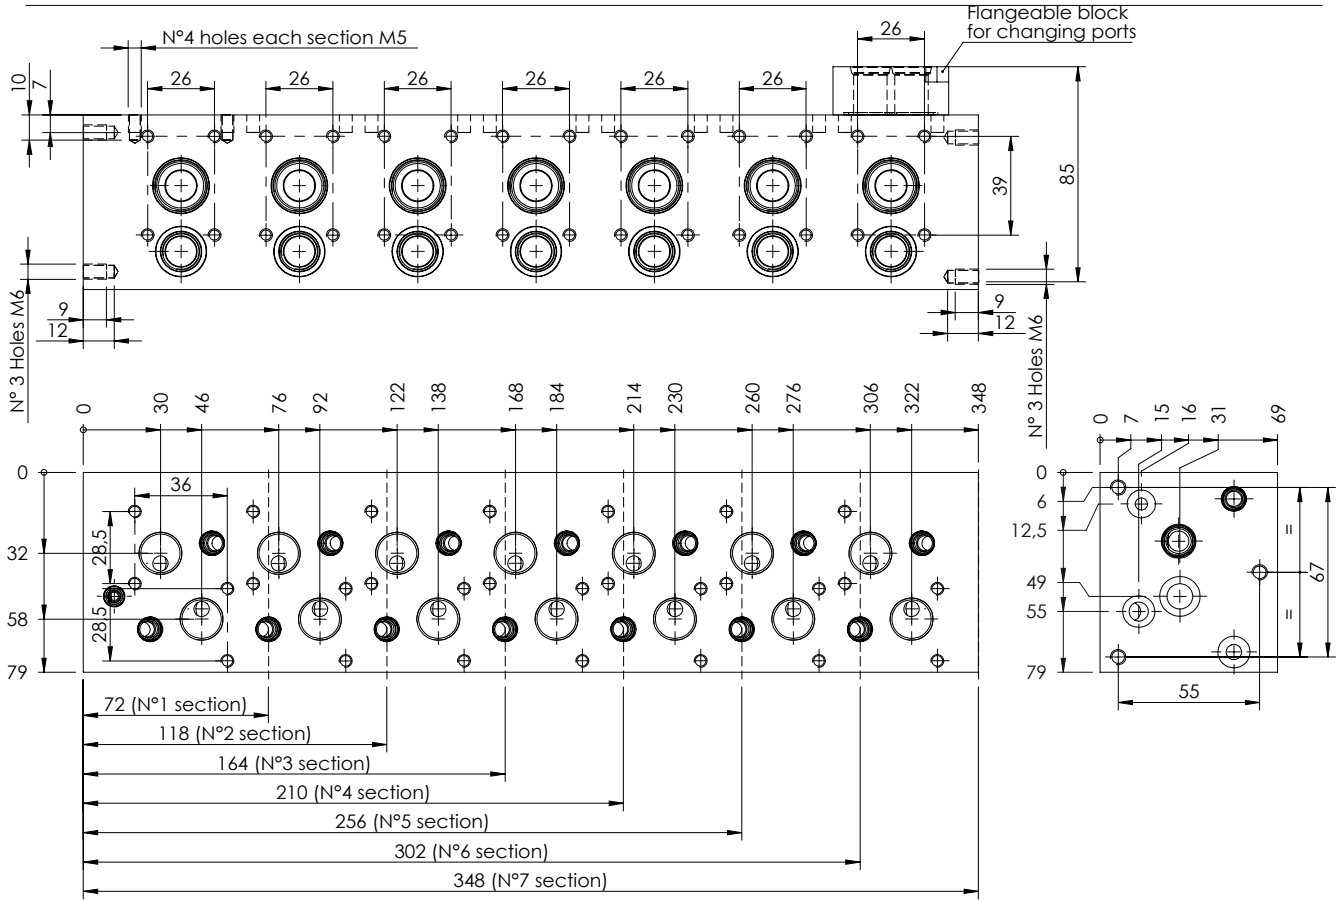

SAE VERSION

METRIC VERSION

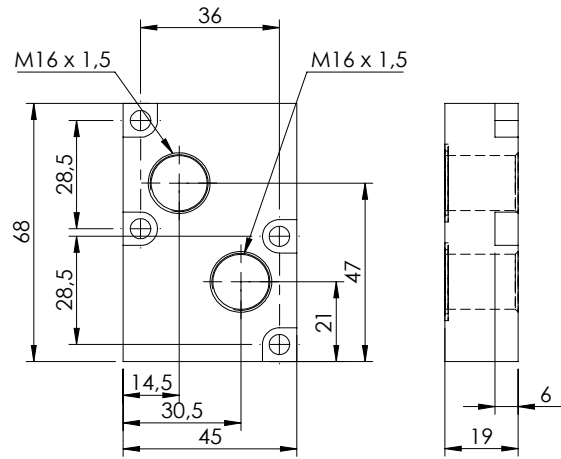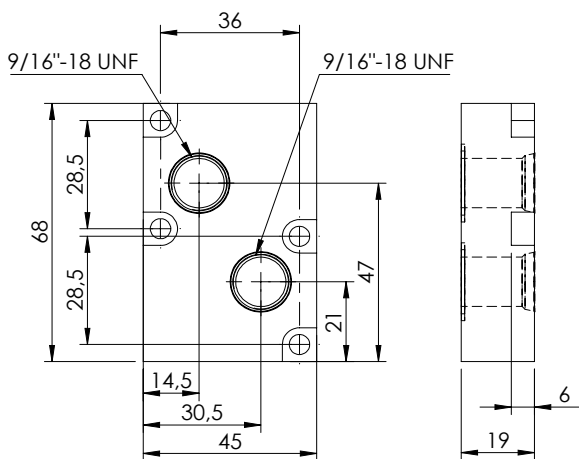

This top flangeable block transform the monoblock to a UNF version.

This top flangeable block transform the monoblock to a Metric version.


Quick code: MP000096

Quick code: MP000097

EBP series - SPOOL SECTION

SHNE-030-LSON

**30 L/MIN
SOLENOID VALVE**

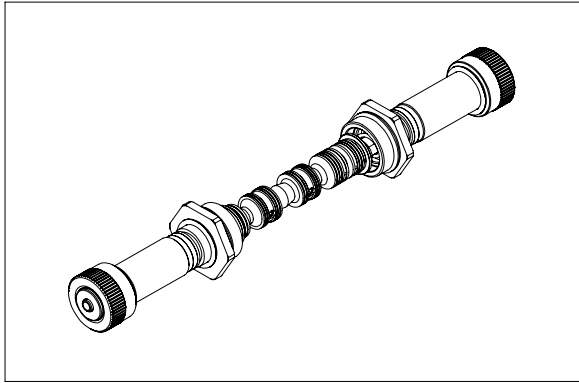

This spool group is rated for 30 lpm and for a maximum pressure of 320 bar; the spool is actuated by on off tubes and can be ordered with different hydraulic schemes. Each spools is interchangeable to give maximum flexibility and can be fit in all monoblock sections, changing spools require adequate training. The group is made by two tubes, one spool, two springs and mounting components.

TECHNICAL DATA

Max pressure	320 bar
Rated flow	30 l/min
Max excitation frequency	3 Hz
Duty cycle	100 % ED
Hydraulic fluid	Mineral oil DIN 51 524
Fluid viscosity	10/500 mm ² /s
Fluid temperature	-25°C/75°C
Enviroment temperature	-25°C/60°C
Weight with one solenoid	0,12 Kg
Weight with two solenoid	0,15 kg

ORDERING DETAILS: SEPARATE ELEMENTS

SH - 030 - LS ** - ** - 396 - ** N**

*	VERRIDE TYPE
N	Standard
P	Push
V	Screw

*	SECTION TYPE
E	Solenoid operated
L	Solenoid operated plus lever operated
M	Lever operated

**	ACTUATION TYPE
ON	On/Off
SS	Soft shift

**	SPOOL TYPE
...	See table n°1

*	COILS VOLTAGE
	no coils
A	12 V DC
B	24 V DC

**	COILS TYPE
	no coils
HR	Hirschmann (ISO 4400 DIN 43650)
DT	Deutshc (DT04-2P)
AJ	Amp Junior (AJ type)


QUICK CODE	
DESCRIPTION	CODE
SHNE-030-LSON-74-396	
SHNE-030-LSON-75-396	

HYDRAULIC SYMBOLS


Table n°1

SPOOL CODE	HYDRAULIC SCHEME	TRANSITORY POSITION	
74			
75			
SPOOL CODE	HYDRAULIC SCHEME	TRANSITORY POSITION	
a	b	a	b


VERRIDE TYPE

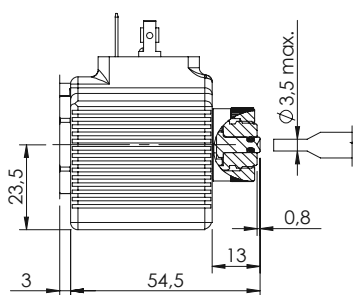

VERRIDE TYPE "N"

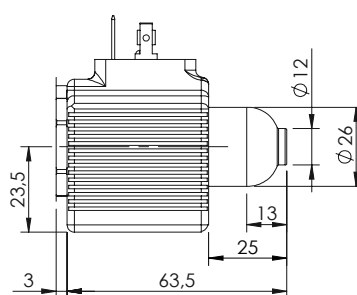

VERRIDE TYPE "P"

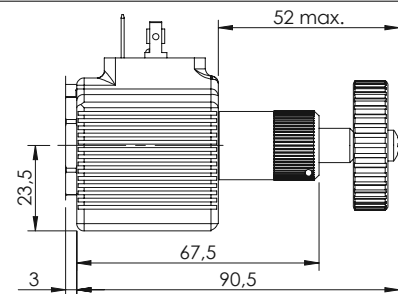


VERRIDE TYPE "V"

SHNE-030-LSON

30 L/MIN SOLENOID VALVE

PERFORMANCE LIMITS CURVES - STANDARD SECTION

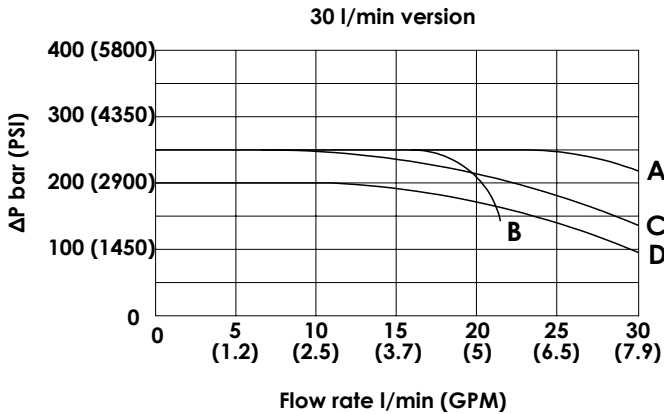


Spool type	Performance limits curve
74	A
75	A
	B
	A
	A
	A
	C
	D

The tests are carried out with hot solenoids, powered with 90 % of nominal voltage, with 50 ° C fluid temperature. The fluid used is mineral oil having a viscosity of 46 mm² / s @ 40 ° C.

The values in the diagram refer to tests carried out with flow simultaneously in both directions (P > A, B > T).

In cases of schemes 4/2 or 4/3 used with the flow in one direction only the performance can change.

PRESSURE DROP CURVES - STANDARD SECTION

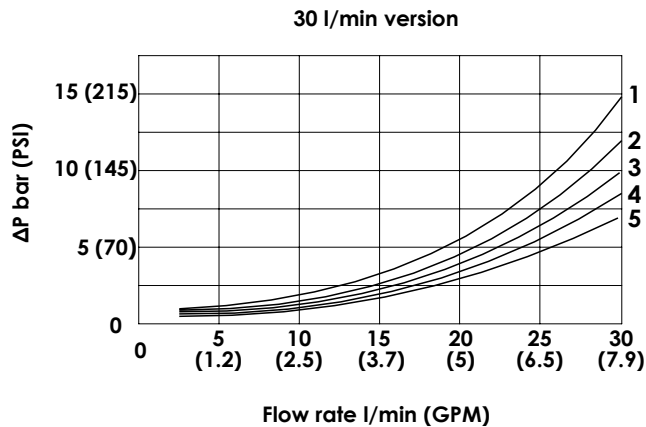



Spool type	Pressure drop curve				
	P>A	P>B	A>T	B>T	P>T
74	3	3	4	4	/
75	3	3	5	5	/
	2	2	1	1	2
	/	3	4	/	/
	/	3	5	/	/
	2	/	/	1	/
	/	3	4	/	/
	/	2	3	/	/

The diagram shows the performance limit curve of standard section. The fluid used is mineral oil viscosity 46 mm²/s at 40 ° C ; the tests are performed at a 40 ° C temperature

OVERALL DIMENSION - STANDARD SECTION


In case of top modular valve MA or MC type installation the coil connection can be faced to the top or to the bottom of the block. (See modular valve section)

In case of top modular valve MB, KE and KF type installation the coil connection can be faced only to the bottom of the block. (See modular valve section)

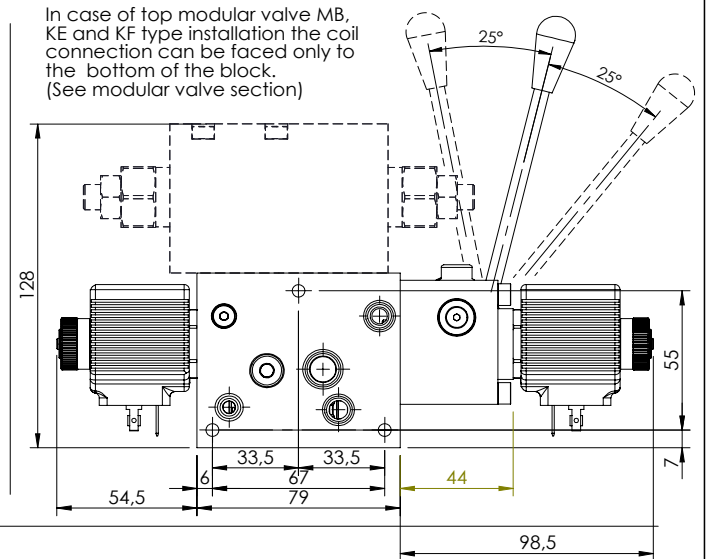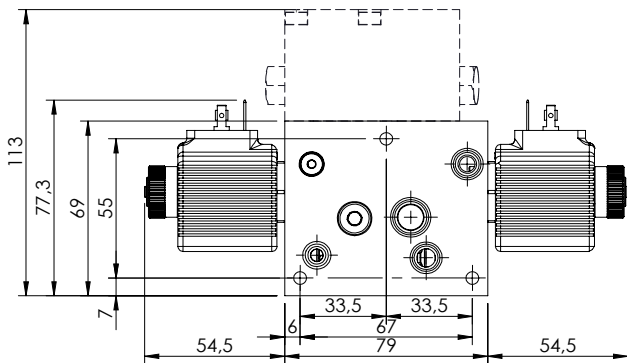

SHNE-060-LSON

60 L/MIN
SOLENOID VALVE

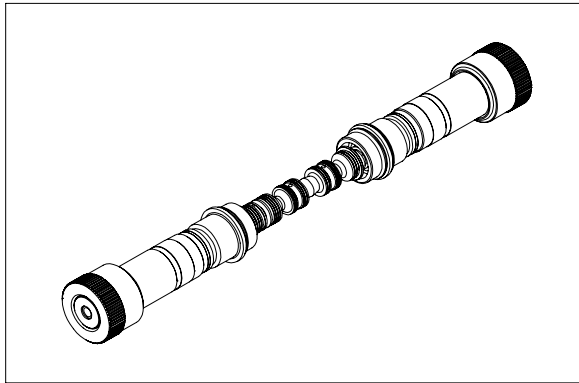

This spool group is rated for 60 lpm and for a maximum pressure of 320 bar; the spool is actuated by on off tubes and can be ordered with different hydraulic schemes. Each spools is interchangeable to give maximum flexibility and can be fit in all monoblock sections, changing spools require adequate training. The group is made by two tubes, one spool, two springs and mounting components.

TECHNICAL DATA

Max pressure	320 bar
Rated flow	60 l/min
Max excitation frequency	3 Hz
Duty cycle	100 % ED
Hydraulic fluid	Mineral oil DIN 51524
Fluid viscosity	10/500 mm ² /s
Fluid temperature	-25°C/75°C
Enviroment temperature	-25°C/60°C
Weight with one solenoid	0,2 Kg
Weight with two solenoid	0,4 kg

ORDERING DETAILS: SEPARATE ELEMENTS

SH* *- 060 - LS ** - ** -396 - ** *N

*	VERRIDE TYPE
N	Standard
P	Push
V	Screw

*	SECTION TYPE
E	Solenoid operated
L	Solenoid operated plus lever operated
M	Lever operated

**	ACTUATION TYPE
ON	On/Off
SS	Soft shift

**	SPOOL TYPE
...	See table n°1

*	COILS VOLTAGE
	no coils
A	12 V DC
B	24 V DC

**	COILS TYPE
	no coils
HR	Hirschmann (ISO 4400 DIN 43650)
DT	Deutshc (DT04-2P)
AJ	Amp Junior (AJ type)


QUICK CODE	
DESCRIPTION	CODE
SHNE-060-LSON-74-396	
SHNE-060-LSON-75-396	

HYDRAULIC SYMBOLS


Table n°1

SPOOL CODE	HYDRAULIC SCHEME	TRANSITORY POSITION
74		
75		
SPOOL CODE	HYDRAULIC SCHEME	TRANSITORY POSITION
a b	a b	a b


VERRIDE TYPE

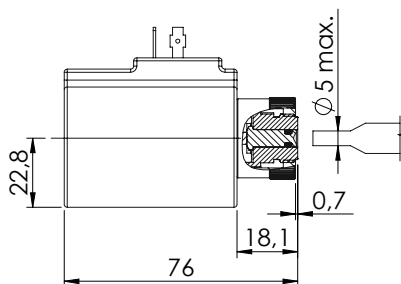

VERRIDE TYPE "N"

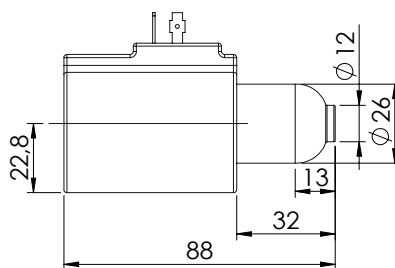


VERRIDE TYPE "P"

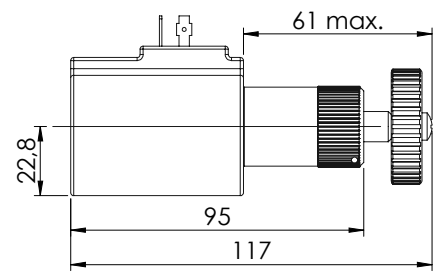

VERRIDE TYPE "V"

PERFORMANCE LIMIT CURVES - STANDARD SECTION

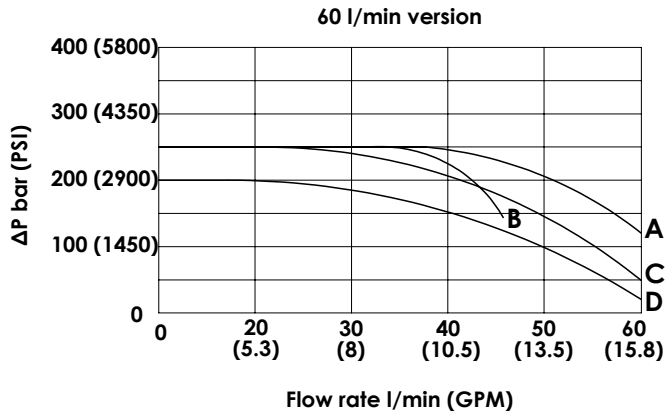


Spool type	Performance limits curve
74	A
75	A
	B
	A
	A
	A
	C
	D

The tests are carried out with hot solenoids, powered with 90 % of nominal voltage, with 50 °C fluid temperature. The fluid used is mineral oil having a viscosity of 46 mm² / s @ 40 °C.

The values in the diagram refer to tests carried out with flow simultaneously in both directions (P > A, B > T).

In cases of schemes 4/2 or 4/3 used with the flow in one direction only the performance can change.

PRESSURE DROP CURVES - STANDARD SECTION

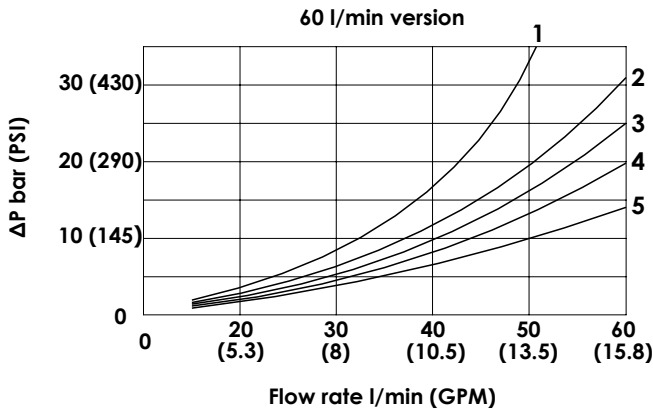



Spool type	Pressure drop curve				
	P>A	P>B	A>T	B>T	P>T
74	3	3	4	4	/
75	3	3	5	5	/
	2	2	1	1	2
	/	3	4	/	/
	/	3	5	/	/
	2	/	/	1	/
	/	3	4	/	/
	/	2	3	/	/

The diagram shows the performance limit curve of standard section. The fluid used is mineral oil viscosity 46 mm²/s at 40 °C ; the tests are performed at a 40 °C temperature

OVERALL DIMENSION - STANDARD SECTION


In case of top modular valve MA or MC type installation the coil connection can be faced to the top or to the bottom of the block. (See modular valve section)

In case of top modular valve MB, KE and KF type installation the coil connection can be faced only to the bottom of the block. (See modular valve section)

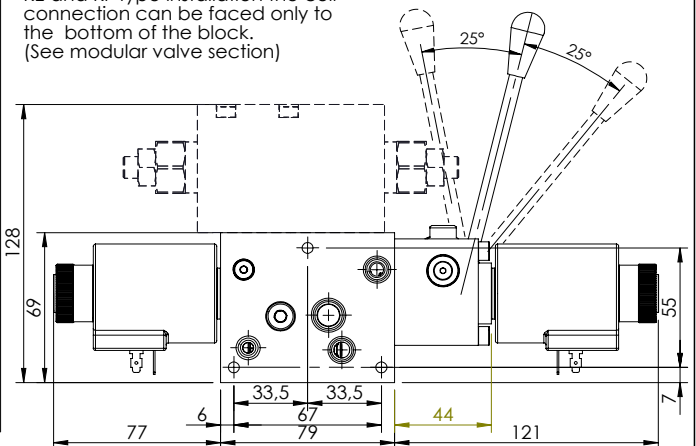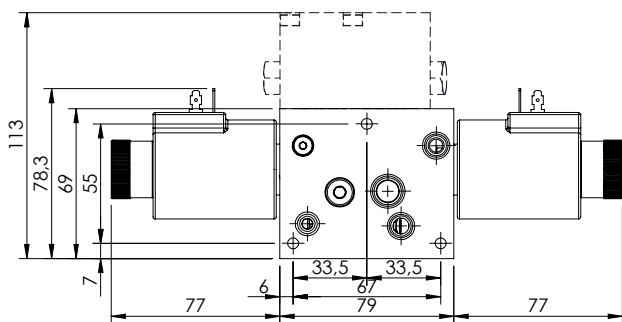

SHNE-050-LSPR

50 L/MIN
PROPORTIONAL
SOLENOID VALVE

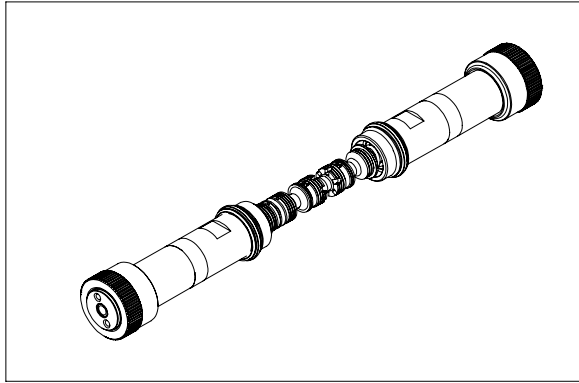

This spool group is rated for 50 lpm and for a maximum pressure of 320 bar; the spool is actuated by proportional tubes and can be ordered with different hydraulic schemes. Each spools is interchangeable to give maximum flexibility and can be fit in all monoblock sections, changing spools require adequate training. The group is made by two tubes, one spool, two springs and mounting components.

TECHNICAL DATA

Max pressure	320 bar
Rated flow	50 l/min
Max excitation frequency	3 Hz
Duty cycle	100 % ED
Max current	1.76A (12 V dc) 0.88A (24 V dc)
Hydraulic fluid	Mineral oil DIN 51524
Fluid viscosity	10/500 mm ² /s
Fluid temperature	-25°C/75°C
Environment temperature	-25°C/60°C
Weight with one solenoid	0,2 Kg
Weight with two solenoid	0,4 kg

ORDERING DETAILS: SEPARATE ELEMENTS

SH** - 0** - LSPR - ** - 396 - ** * N

*	VERRIDE TYPE
N	Standard
P	Push
V	Screw

*	SECTION TYPE
E	Solenoid operated
L	Solenoid operated plus lever operated
M	Lever operated

**	SPOOL FLOW
20	20 l/min at 12 bar - 10 l/min at 6 bar
35	35 l/min at 12 bar - 20 l/min at 6 bar
50	50 l/min at 12 bar - 30 l/min at 6 bar

**	SPOOL TYPE
...	See table n°1

*	COILS VOLTAGE
	no coils
A	12 V DC
B	24 V DC

**	COILS TYPE
	no coils
HR	Hirschmann (ISO 4400 DIN 43650)
DT	Deutshc (DT04-2P)
AJ	Amp Junior (AJ type)

QUICK CODE	
DESCRIPTION	CODE
SHNE-030-LSPR-77-396	
SHNE-030-LSPR-78-396	

TECHNICAL FEATURES

Proportionl type	Spool flow	Rated flow with 12 bar ΔP	Maximum flow	Max. operating pressure
All	20	15	20	320
All	35	30	35	320
All	50	45	50	320


Proportionl type	Spool flow	Rated flow with 6 bar ΔP	Maximum flow	Max. operating pressure
All	20	10	15	320
All	35	20	25	320
All	50	30	35	320

HYDRAULIC SYMBOLS


Table n°1

SPOOL CODE	HYDRAULIC SCHEME	TRANSITORY POSITION
77		
78		


VERRIDE TYPE

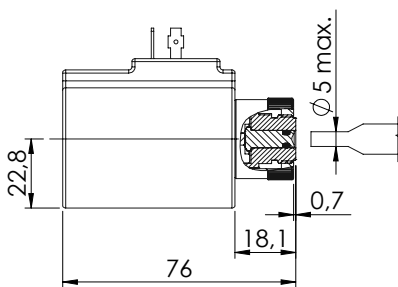

VERRIDE TYPE "N"

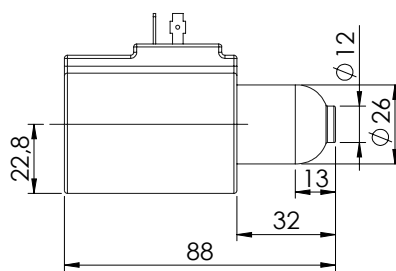

VERRIDE TYPE "P"

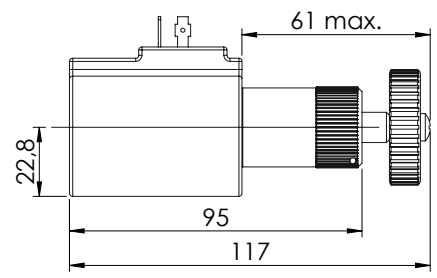


VERRIDE TYPE "V"


SHNE-050-LSPR

50 L/MIN
PROPORTIONAL
SOLENOID VALVE


FLOW DIAGRAM - 050

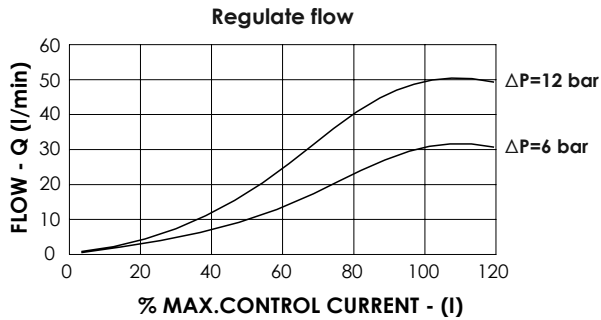


COMPESATION DIAGRAM - 050

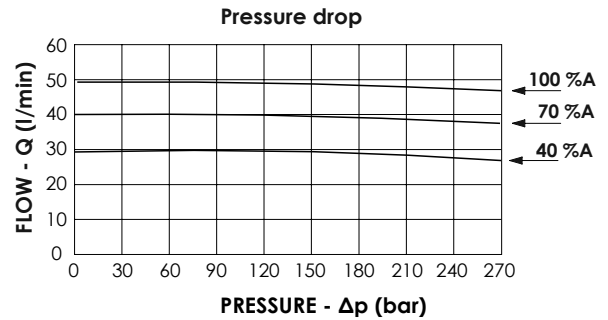


FLOW DIAGRAM - 035

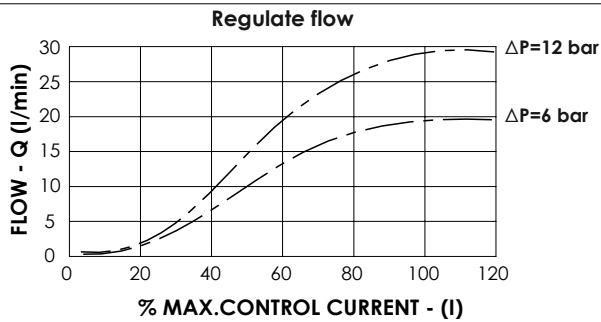


COMPENSATION DIAGRAM - 035

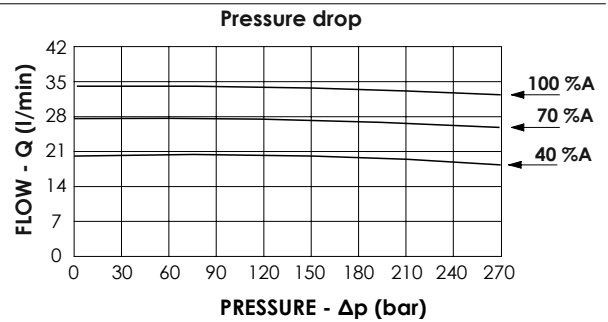

FLOW DIAGRAM - 020

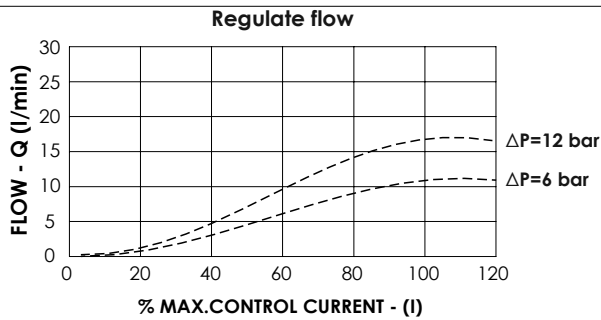

COMPENSATION DIAGRAM - 020

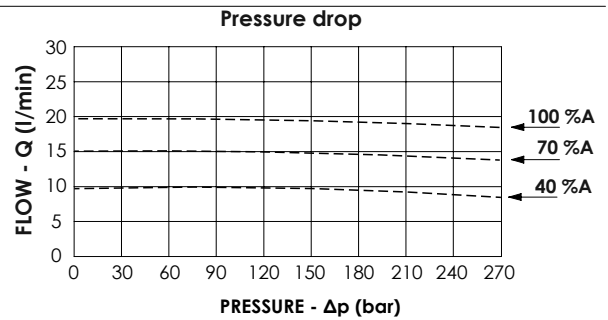

Spool type:



- 10 _____
- 20 _____
- 30 _____

In the diagram shows the performance limits curves of standard section. The fluid used is mineral oil viscosity 46 mm²/s at 40 °C; the tests were performed at a 40 °C temperature


OVERALL DIMENSION - STANDARD SECTION

In case of top modular valve MA or MC type installation the coil connection can be faced to the top or to the bottom of the block. (See modular valve section)

In case of top modular valve MB, KE and KF type installation the coil connection can be faced only to the bottom of the block. (See modular valve section)

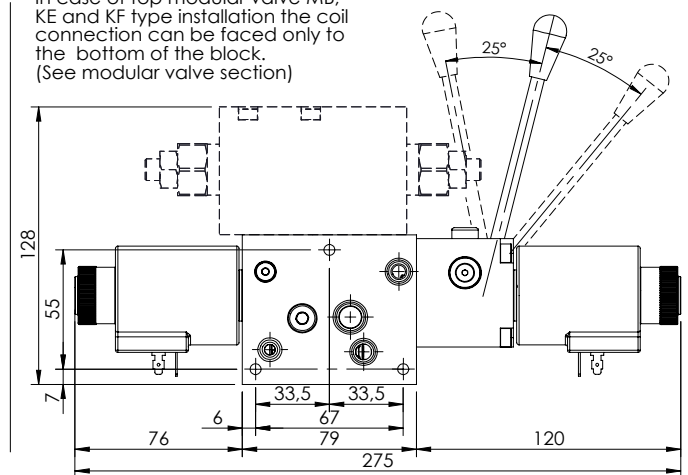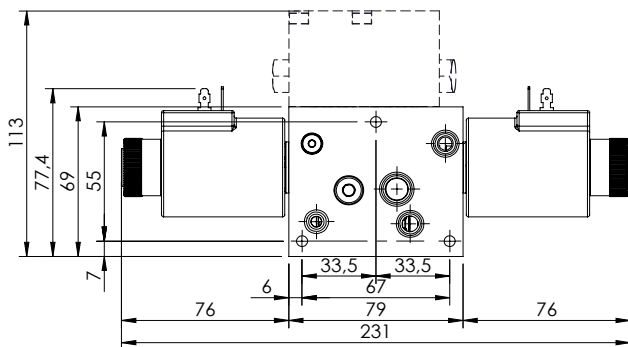

MANUAL LEVER

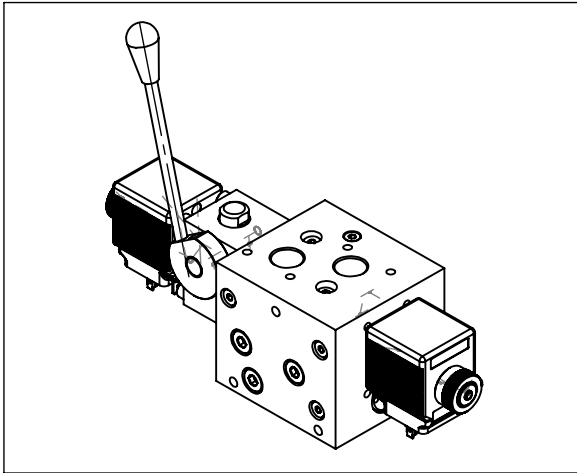


The lever option allow to operate manually the spool and can be ordered for all hydraulic schemes; in the standard version it is installed between monoblock and B port side coil. The lever is normally installed on the monoblock port side but can be installed also rotated of 180°; in each of these two positions the lever can be mounted vertical or horizontal simply removing the lever and reinstalling. The lever is not engaged during solenoid operation and doesn't move when a coil is energized.

TECHNICAL DATA

Max pressure	210/320 bar
Max pressure in line type	210 bar
Rated flow	30/60 l/min
Insertion	100 % ED
Weight more than standard	3 Kg
Weight more than standard	3,5 kg


OVERALL DIMENSIONS/ LEVER FOR 30 L/MIN SECTION

The lever option is designed to activate the spool manually, when the lever is pulled the flow is delivered from the port close to the lever, when it is pushed the flow is delivered from the port opposite to the lever. The standard operation deliver full flow, in case of override operation it is possible to reduce the maximum stroke and consequently the speed, for this option contact AFT sales network. The lever can be easily positioned vertical or horizontal by unscrewing it from the rotating shaft.

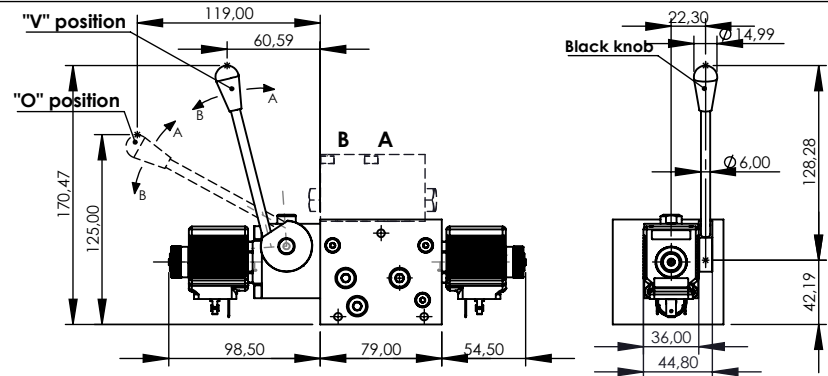


OVERALL DIMENSIONS/ LEVER FOR 60 L/MIN SECTION

The lever option is designed to activate the spool manually, when the lever is pulled the flow is delivered from the port close to the lever, when it is pushed the flow is delivered from the port opposite to the lever. The standard operation deliver full flow, in case of override operation it is possible to reduce the maximum stroke and consequently the speed, for this option contact AFT sales network. The lever can be easily positioned vertical or horizontal by unscrewing it from the rotating shaft.

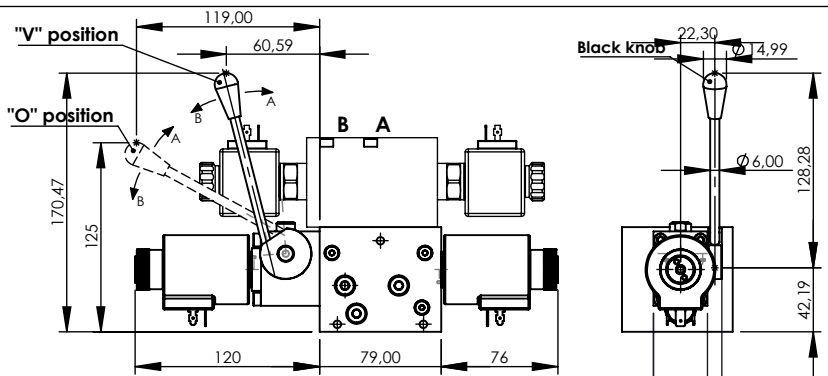


OVERALL DIMENSION/ LEVER FOR 50 L/MIN PROPORTIONAL SECTION

The lever option is designed to activate the spool manually, when the lever is pulled the flow is delivered from the port close to the lever, when it is pushed the flow is delivered from the port opposite to the lever. The standard operation deliver full flow, in case of override operation it is possible to reduce the maximum stroke and consequently the speed, for this option contact AFT sales network. The lever can be easily positioned vertical or horizontal by unscrewing it from the rotating shaft.

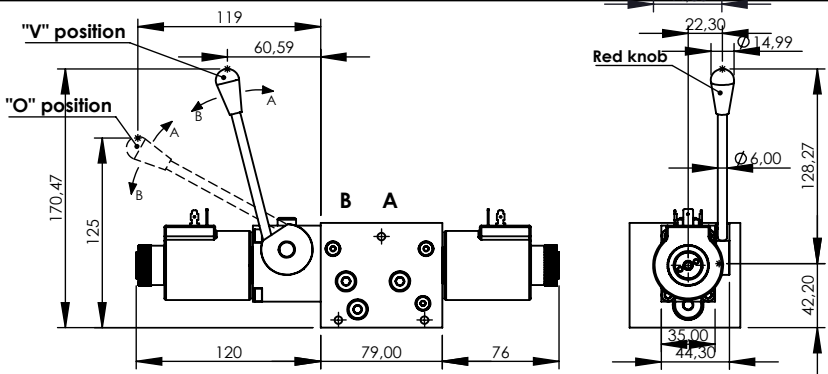

MOUNTING SCREW


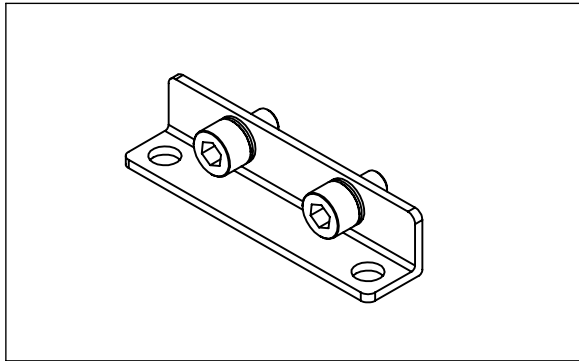


This accessories it use for mounting and fixing distributor on machine, in case the mounting brackets, or for mounting the different componets who assemble the whole distributor.

TECHNICAL DATA


Screw type	ISO 4762
Thread type	coarse thread
Standard screw	resistence class 8.8
High resistance screw	resistence class 12.9
Standard screw treatment	zinc-plated (white)
High res. screw treatment	Anodized (black)

MOUNTING BRACKETS

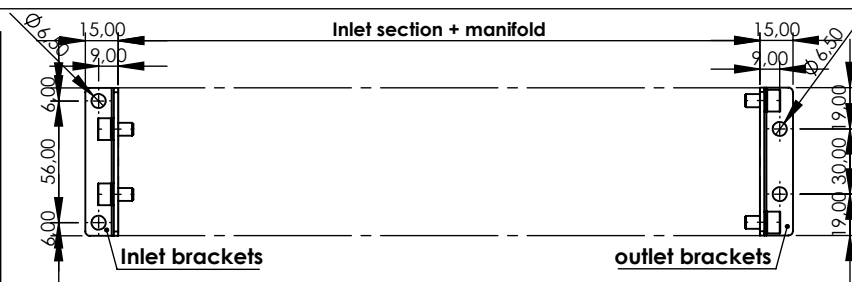


Mounting brackets	Screw lenght (mm)	Reference	Tightening Torque
PV000371	M6x10	AV000015 + PR000129	6 - 7 N/m

MOUNTING INLET SECTION



Inlet section	Screw lenght (mm)	Reference	Tightening Torque
SF000048	85	PE000491	6 - 7 N/m
SF000047	85	PE000491	6 - 7 N/m
SF000046	85	PE000491	6 - 7 N/m
SF000041	85	PE000491	6 - 7 N/m

FIXING STACKING MODULES




Flangiabile valve	Screw lenght (mm)	Reference	Tightening Torque
MP	M5x16	AV000035	3 - 4 N/m
MA, MC and MB	M5x45	PE000148	3 - 4 N/m
KE and MF	M5x60	AV000016	3 - 4 N/m




1800-OILSOL
1800-645765

<https://oilsolutions.com.au/>

sales@oilsolutions.com.au

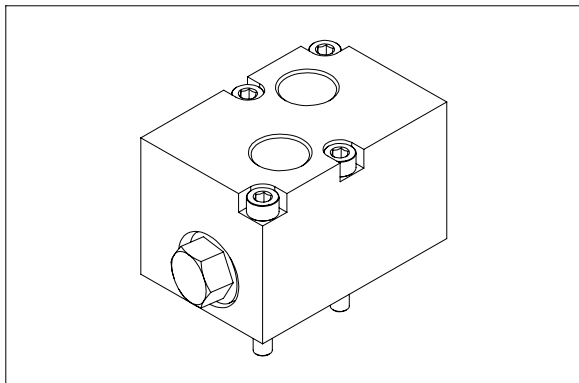

HYDRAULIC SCHEME

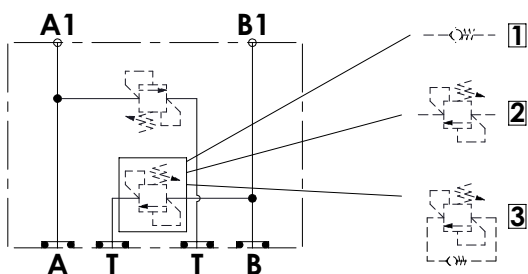


This flangeable valve can be mounted on top of the monoblock after removing the T line plugs; it has different configurations such as anti-shock, anti-cavitation or anti-shock/cavitation. There are three mounting options, single valve on A or on B for single effect operation or valves on A and B for double effect operation. The manifold is made in aluminium with anodization surface treatment or on request in steel with zinc plating treatment.

TECHNICAL DATA

Max pressure	210/320 bar
Rated flow	60 l/min
Hydraulic fluid	Mineral oil DIN 51 524
Fluid viscosity	10-500 mm ² /s
Fluid temperature	-25°C/75°C
Environment temperature	-25°C/60°C
Weight	0,4 Kg

PRESSURE DROP

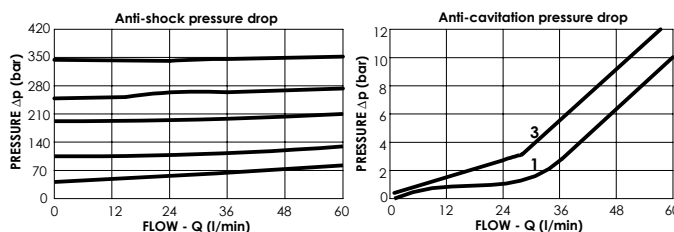

ORDERING DETAILS: SEPARATE ELEMENTS

MA** -060- *NFD- ** -***-N***

* VALVE TYPE	
S	Single effect
D	Double effect

* VALVE OPTION	
N	Valves in both ports
A	Valve only A port
B	Valve only B port

* MATERIAL TYPE	
A	Steel zinc-plated (320 bar)
Z	Aluminium anodized (210 bar)


** VALVE TYPE		
	A line	B line
	no valve	no valve
1	anti-cavitation	anti-cavitation
2	anti-shock	anti-shock
3	anti-cav/shock	anti-cav/shock

*** PORTS			
	A line	B line	M
G38	G 3/8"	G 3/8"	/
U09	9/16"-18 UNF	9/16"-18 UNF	/

* SETTINGS RANGE	
...	10 - 310 bar
../..	For difference A e B setting sign it


QUICK CODE	
DESCRIPTION	CODE

OVERALL DIMENSIONS

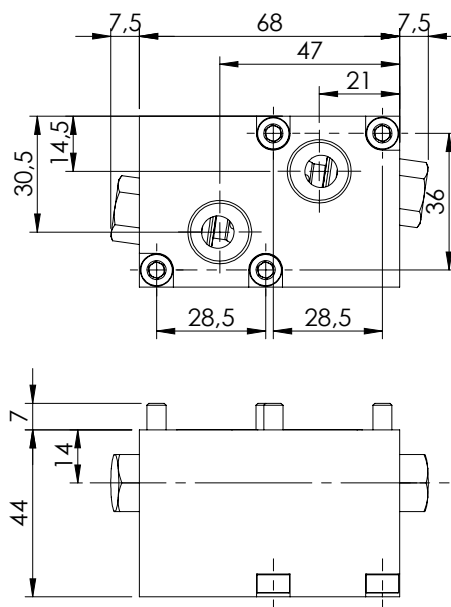


MCDN-060-ZNFD

PO CHECK VALVE FLANGIABLE VALVE

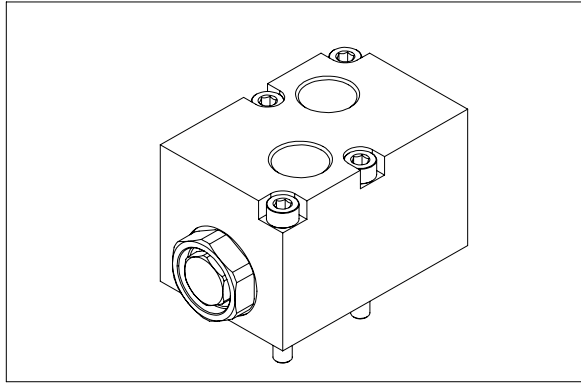

This flangeable valve can be mounted on top of the monoblock keeping the T line plugs.
The valve consist in two pilot operated check piloted by the opposite line and is poppet type.
The manifold is made in aluminium with anodization surface treatment or on request in steel with zinc plating treatment.


HYDRAULIC SCHEME



TECHNICAL DATA

Max pressure	210/320 bar
Rated flow	60 l/min
Pilot ratio	6:1
Hydraulic fluid	Mineral oil DIN 51524
Fluid viscosity	10-500 mm ² /s
Fluid temperature	-25°C/75°C
Environment temperature	-25°C/60°C
Weight	0,4 Kg

PRESSURE DROP

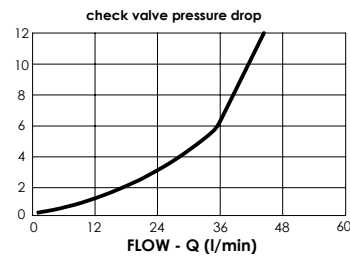

ORDERING DETAILS: SEPARATE ELEMENTS

MC - 060 - * NFD-06-*** - N**

*	VALVE TYPE
S	Single effect
D	Double effect


*	VALVE OPTION
N	Check valve on A e B ports
A	Check valve only A port
B	Check valve only B port

*	MATERIAL TYPE
A	Steel zinc-plated (320 bar)
Z	Aluminium anodized (210 bar)

***	PORTS		
	A line	B line	M
G38	G 3/8"	G 3/8"	/
U09	9/16"-18 UNF	9/16"-18 UNF	/

QUICK CODE	
DESCRIPTION	CODE
MCDN-060-ZNFD-06-G38-N210	MC000173
MCSA-060-ZNFD-06-G38-N210	MC000185

OVERALL DIMENSIONS

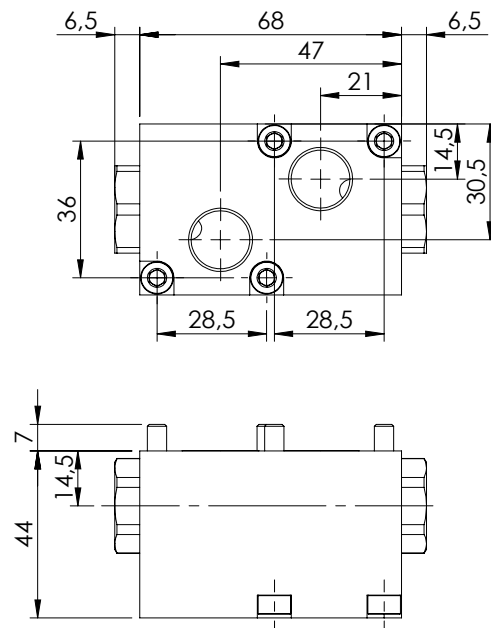


EB - MODULAR VALVE SECTION




MBDN-060-ZNFD

**OVERCENTER
FLANGEABLE VALVE**

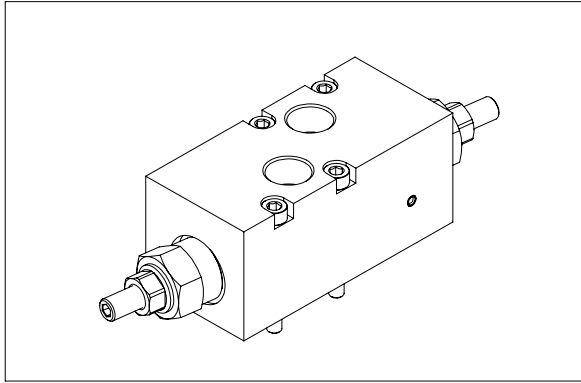

HYDRAULIC SCHEME

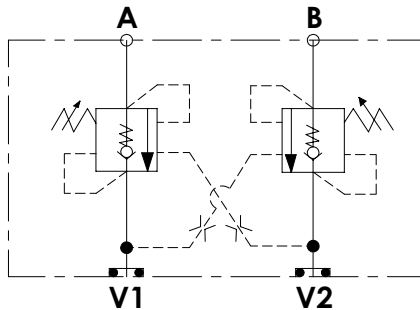


This modular block is made with overcenter valves to control the load on A and B port. The valves are poppet type with a pilot ratio of 4:1, other pilot ratios are available on request. The standard configuration provides valves on both lines, it is possible to order also valves on only one side. The manifold is made in aluminium with anodization surface treatment or on request in steel with zinc plating treatment.

TECHNICAL DATA

Max pressure	210/320 bar
Rated flow	60 l/min
Pilot ratio	4:1
Hydraulic fluid	Mineral oil DIN 51524
Fluid viscosity	10-500 mm ² /s
Fluid temperature	-25°C/75°C
Environment temperature	-25°C/60°C
Weight	0,4 Kg

PRESSURE DROP

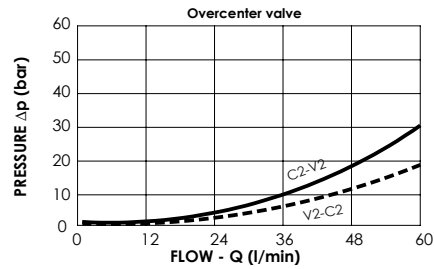

ORDERING DETAILS: SEPARATE ELEMENTS

MB - 060 - *NFD-04-*** - N*****

*	VALVE TYPE
S	Single effect
D	Double effect

*	VALVE OPTION
N	Check valve on A e B ports
A	Check valve only A port
B	Check valve only B port


*	MATERIAL TYPE
A	Steel zinc-plated (320 bar)
Z	Aluminium anodized (210 bar)

***	PORTS		
	A line	B line	M
G38	G 3/8"	G 3/8"	/
U09	9/16"-18 UNF	9/16"-18 UNF	/

*	O-RING TYPE
100	100 bar settings
210	210 bar settings (standard)
320	320 bar settings (steel manifold)

QUICK CODE	
DESCRIPTION	CODE
MBDN-060-ZNFD-04-G38-N210	MB000874
MBSA-060-ZNFD-04-G38-N210	MB000875

OVERALL DIMENSIONS

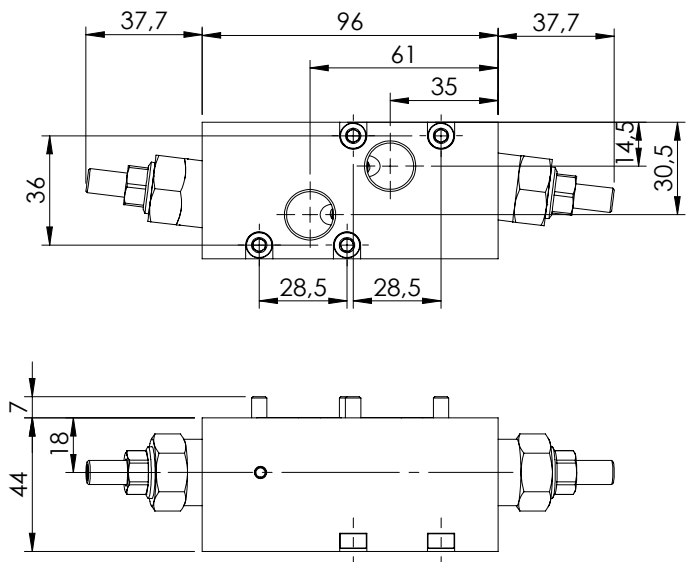


EB - MODULAR VALVE SECTION




KEDN-060-ZNFD

IN LINE ELETRICAL FLANGEABLE VALVE

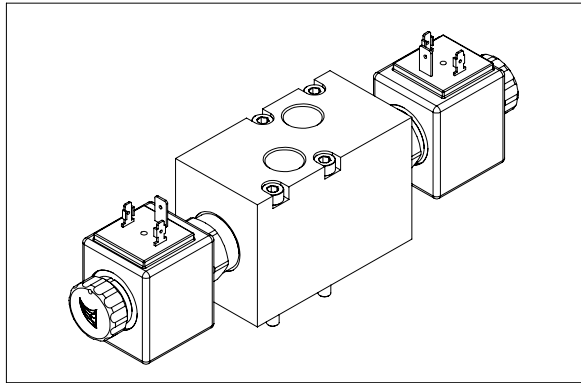

HYDRAULIC SCHEME

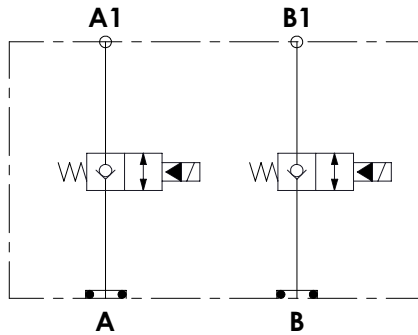


This modular block is equipped with solenoid valves, normally closed, poppet type and can be used to obtain a leak free function on the spool valve or to stop functions. It is available in three configurations, with valves on both lines or on A or on B line.

The manifold is made in aluminium with anodization surface treatment or on request in steel with zinc plating treatment.

TECHNICAL DATA

Max pressure	210/320 bar
Rated flow	60 l/min
Insertion	100% ED
Hydraulic fluid	Mineral oil DIN 51524
Fluid viscosity	10-500 mm ² /s
Fluid temperature	-25°C/75°C
Environment temperature	-25°C/60°C
Weight	0,4 Kg

PRESSURE DROP

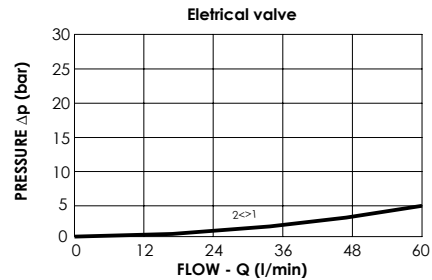

ORDERING DETAILS: SEPARATE ELEMENTS

KE - 060 - *NFD-04 - *** - **N**

*	VALVE TYPE
S	Single effect
D	Double effect

*	VALVE OPTION
N	EV on A e B ports
A	EV only A port
B	EV only B port


*	MATERIAL TYPE
A	Steel zinc-plated (320 bar)
Z	Aluminium anodized (210 bar)

***	PORTS		
	A line	B line	M
G38	G 3/8"	G 3/8"	/
U09	9/16"-18 UNF	9/16"-18 UNF	/

*	VOLTAGE
	no coils
A	12 V dc
B	24 V dc

**	COILS TYPE
	no coils
HR	Hirschmann (ISO 4400 DIN 43650)
DT	Deutsch (DT04-2P)
AJ	Amp junior (AJ type)


QUICK CODE	
DESCRIPTION	CODE

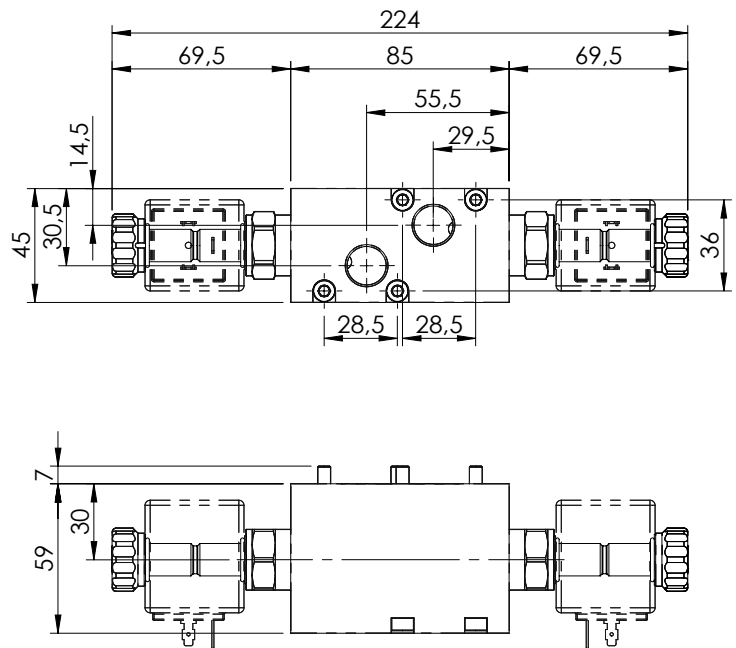


EB - MODULAR VALVE SECTION

KFDN-060-ZNFD

IN LINE FLOW RESTRICTOR FLANGIABLE VALVE

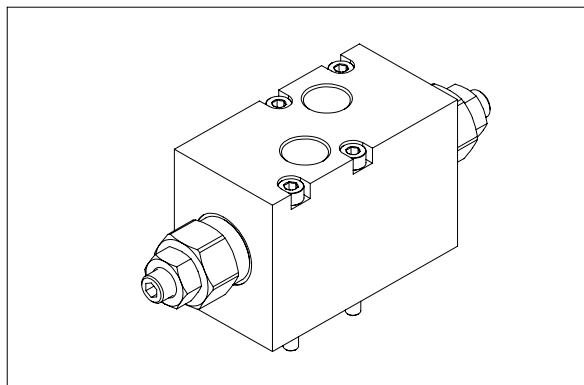

HYDRAULIC SCHEME

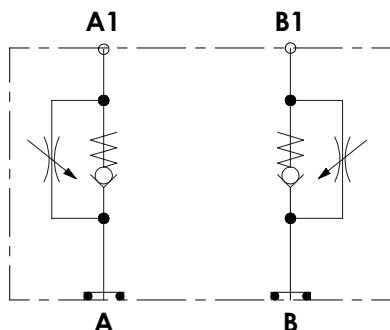


This modular valve is equipped with mono directional flow restrictor not compensated to adjust the speed of the application; it is available in three configurations, with valves on A line, on B line (single effect) or A and B line (double effect). The manifold is made in aluminium with anodization surface treatment or on request in steel with zinc plating treatment.

TECHNICAL DATA

Max pressure	210/320 bar
Rated flow	60 l/min
Hydraulic fluid	Mineral oil DIN 51524
Fluid viscosity	10-500 mm ² /s
Fluid temperature	-25°C/75°C
Environment temperature	-25°C/60°C
Weight	0,8 Kg

PRESSURE DROP

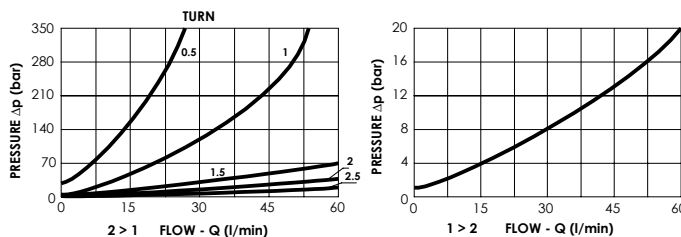

ORDERING DETAILS: SEPARATE ELEMENTS

KF * * - 060 - * NFD-04 - * - N**

* VALVE TYPE	
S	Single effect
D	Double effect


* VALVE OPTION	
N	Flow restrictor on A e B ports
A	Flow restrictor only A port
B	Flow restrictor only B port

* MATERIAL TYPE	
A	Steel zinc-plated (320 bar)
Z	Aluminium anodized (210 bar)

*** PORTS			
	A line	B line	M
G38	G 3/8"	G 3/8"	/
U09	9/16"-18 UNF	9/16"-18 UNF	/

QUICK CODE	
DESCRIPTION	CODE


OVERALL DIMENSIONS

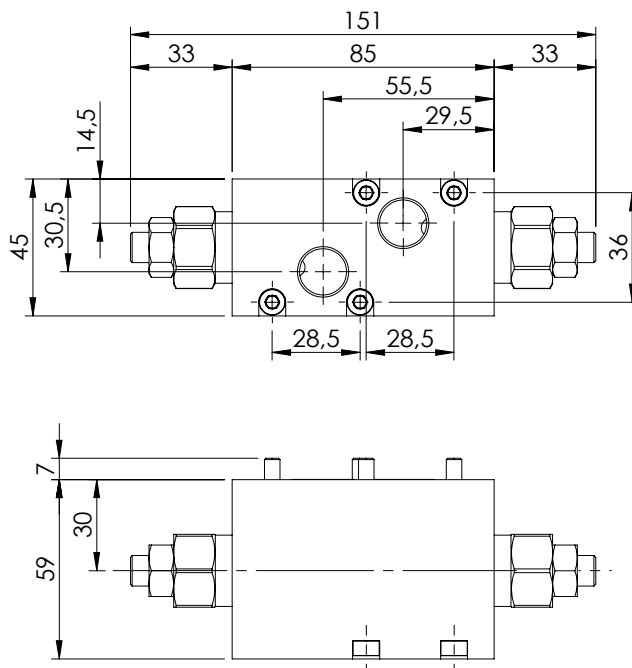

EB - COIL SECTION



COIL SERIES M7

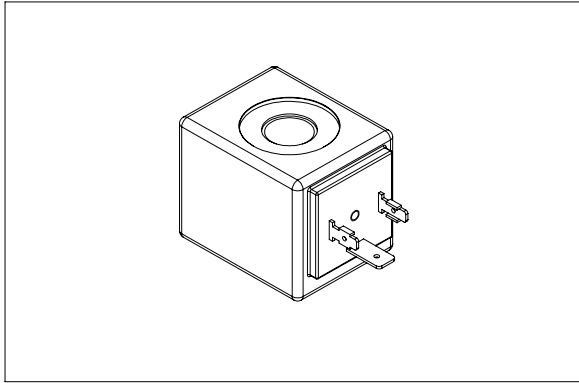

COIL TYPE

The coils have the magnetic circuit coated with black thermoplastic material. All metal parts are protected against oxidation according to RoHS directive. For proper insulation it is required to install the proper seals supplied with the tubes.

TECHNICAL DATA

Protection type	IP 65 with all seal
Protection type	IP 69K with all seal only DT
Alimentation tolerance	+10%
Ambient temperature	-20°C +50°C
Duty cycle	100% ED (max 40°C ambient)
Isolation class	Class H (max 180°C)
Weight	0,18 kg

Coils are available with three different connections type, special voltage are available on request, please contact AFT sales network.


(1) Ambient temperature 25°C

(2) Ambient temperature 20°C

OVERALL DIMENSIONS


DIN 43650 (HR)

Coils		Max winding temperature (1)	Nominal potency	Resistance (±7%) (2)	Code parts
Code	Voltage				
A	12 V DC	135°C	20 W	7.2	AB000002
B	24 V DC	135°C	20 W	28.8	AB000003
C	48 V DC	135°C	20 W	115.2	AB000046
D	110 R AC	120°C	20 W	605	AB000012
E	220 R AC	120°C	20 W	2420	AB000007

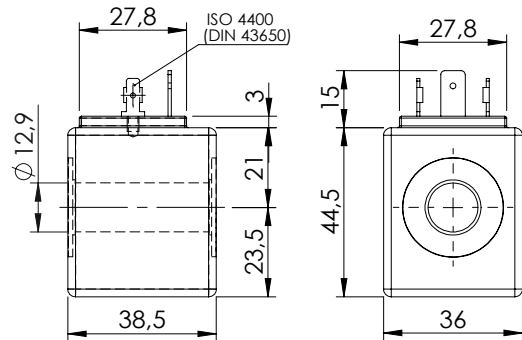


DEUTSCH (DTV)

Coils		Max winding temperature (1)	Nominal potency	Resistance (±7%) (2)	Code parts
Code	Voltage				
A	12 V DC	135°C	20 W	7.2	AB000022
B	24 V DC	135°C	20 W	28.8	AB000023
C	48 V DC	135°C	20 W	115.2	
D	110 R AC	120°C	20 W	605	
E	220 R AC	120°C	20 W	2420	

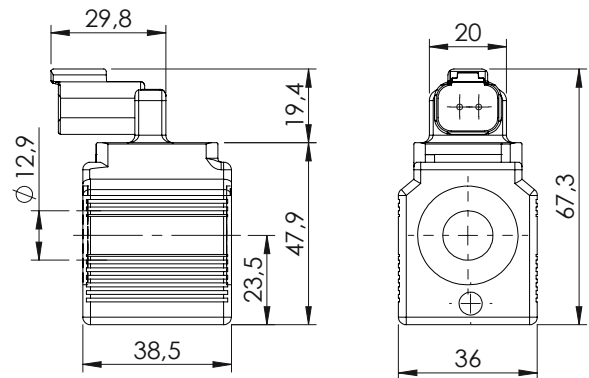


AMP JUNIOR (AJ)

Coils		Max winding temperature	Nominal potency	Resistance (±7%)	Code parts
Code	Voltage				
A	12 V DC	135°C	20 W	7.2	AB000005
B	24 V DC	135°C	20 W	28.8	AB000014
C	48 V DC	135°C	20 W	115.2	AB000021
D	110 R AC	120°C	20 W	605	
E	220 R AC	120°C	20 W	2420	

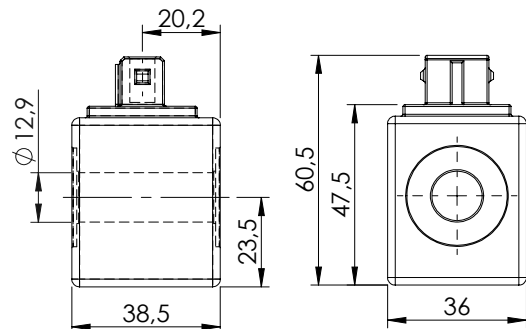

COIL SERIES M14

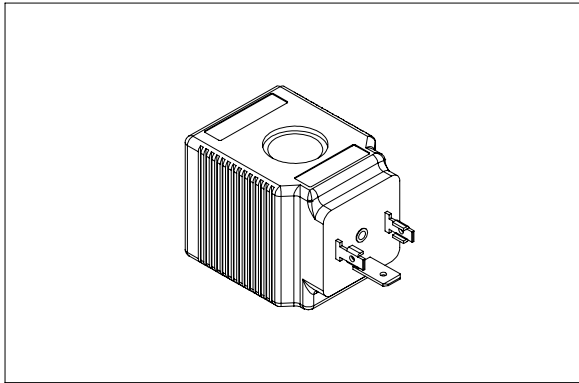

COILS TYPE

The coils have the magnetic circuit coated with black thermoplastic material. All metal parts are protected against oxidation according to RoHS directive. For proper insulation it is required to install the proper seals supplied with the tubes.

TECHNICAL DATA

Protection type	IP 65 with all seal
Protection type	IP 69K with all seal only DT
Activation	18000/h
Alimentation tolerance	+10%
Ambient temperature	-20°C + 50°C
Duty cycle	100% ED (max 40°C ambient)
Isolation class	Class H (max 180°C)
Weight	0,18 kg

OVERALL DIMENSIONS

Coils are available with three different connections type, special voltage are available on request, please contact AFT sales network.

- (1) Ambient temperature 25°C
- (2) Ambient temperature 20°C

DIN 43650 (HR)







Coils		Max winding temperature (1)	Nominal potency	Resistance (±7%) (2)	Code parts
Code	Voltage				
A	12 V DC	135°C	26 W	5.54	AB000143
B	24 V DC	135°C	26 W	22.15	AB000144
C	48 V DC	135°C	26 W	88.6	
D	110 R AC	120°C	26 W	465.4	
E	220 R AC	120°C	26 W	1861.5	

DEUTSCH (DTV)


Coils		Max winding temperature (1)	Nominal potency	Resistance (±7%) (2)	Code parts
Code	Voltage				
A	12 V DC	135°C	26 W	5.54	AB000132
B	24 V DC	135°C	26 W	22.15	AB000133
C	48 V DC	135°C	26 W	88.6	
D	110 R AC	120°C	26 W	465.4	
E	220 R AC	120°C	26 W	1861.5	

AMP JUNIOR (AJ)

Coils		Max winding temperature	Nominal potency	Resistance (±7%)	Code parts
Code	Voltage				
A	12 V DC	135°C	26 W	5.54	AB000136
B	24 V DC	135°C	26 W	22.15	
C	48 V DC	135°C	26 W	88.6	AB000131
D	110 R AC	120°C	26 W	465.4	
E	220 R AC	120°C	26 W	1861.5	

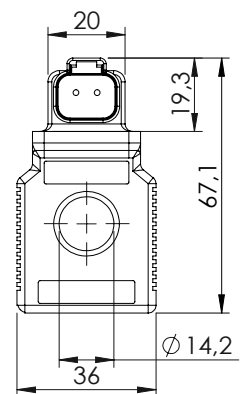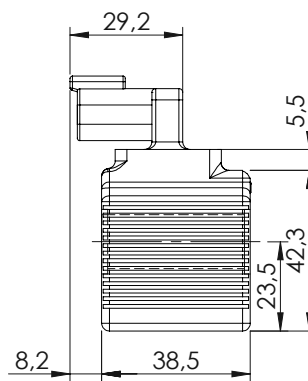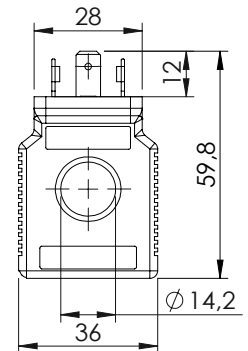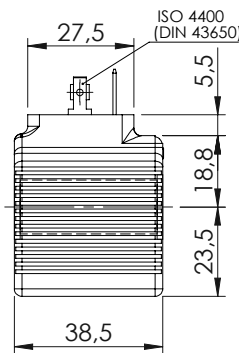

COIL SERIES M8

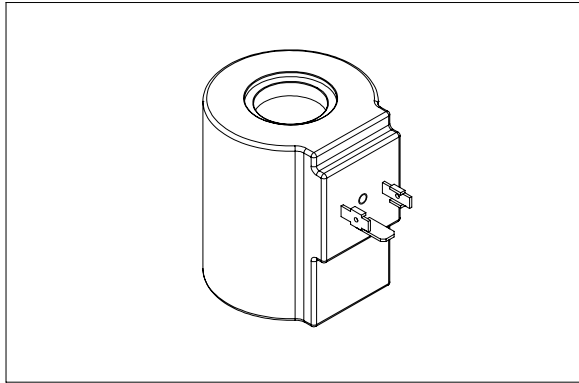

COILS TYPE

The coils have the magnetic circuit coated with black thermoplastic material. All metal parts are protected against oxidation according to RoHS directive. For proper insulation it is required to install the proper seals supplied with the tubes.

TECHNICAL DATA


Protection type	IP 65 with all seal
Protection type	IP 69K with all seal only DT
Alimentation tolerance	+10%
Ambient temperature	-20°C + 50°C
Duty cycle	100% ED (max 40°C ambient)
Isolation class	Class H (max 180°C)
Weight	0,18 kg

Coils are available with three different connections type, special voltage are available on request, please contact AFT sales network.
 (1) Ambient temperature 25°C
 (2) Ambient temperature 20°C

OVERALL DIMENSIONS


HIRSCHMANN (HR)

Coils		Max winding temperature (1)	Nominal potency	Resistance (±7%) (2)	Code parts
Code	Voltage				
A	12 V DC	135°C	33 W	4.36	AB000015
B	24 V DC	135°C	33 W	17.5	AB000029
C	48 V DC	135°C	33 W	69.8	AB000158
D	110 R AC	120°C	33 W	366.7	AB000092
E	220 R AC	120°C	33 W	1466.7	

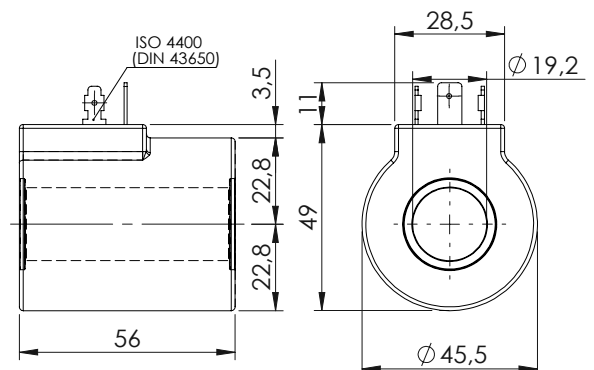


DEUTSCH (DTV)

Coils		Max winding temperature (1)	Nominal potency	Resistance (±7%) (2)	Code parts
Code	Voltage				
A	12 V DC	135°C	33 W	4.36	AB000104
B	24 V DC	135°C	33 W	17.5	AB000105
C	48 V DC	135°C	33 W	69.8	
D	110 R AC	120°C	33 W	366.7	
E	220 R AC	120°C	33 W	1466.7	

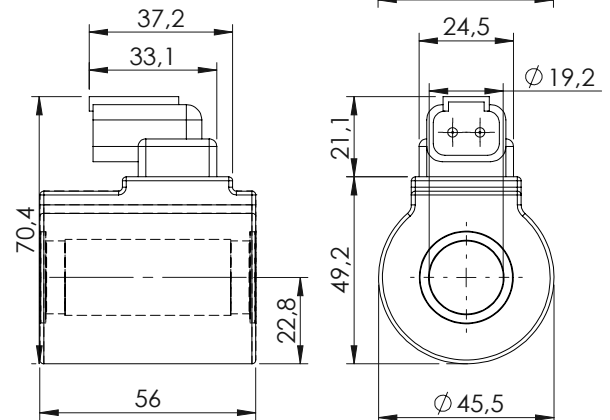


AMP JUNIOR (AJ)

Coils		Max winding temperature	Nominal potency	Resistance (±7%)	Code parts
Code	Voltage				
A	12 V DC	135°C	33 W	4.36	AB000048
B	24 V DC	135°C	33 W	17.5	
C	48 V DC	135°C	33 W	69.8	
D	110 R AC	120°C	33 W	366.7	
E	220 R AC	120°C	33 W	1466.7	

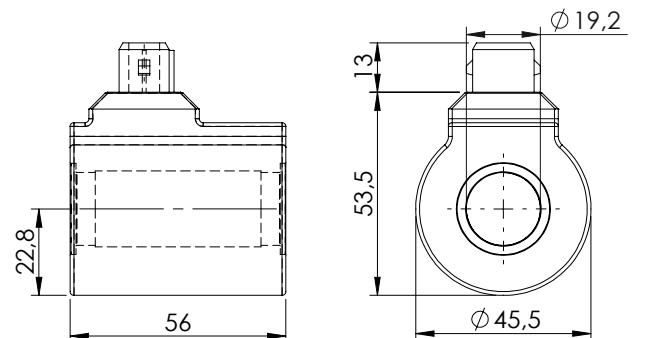

COIL SERIES M15

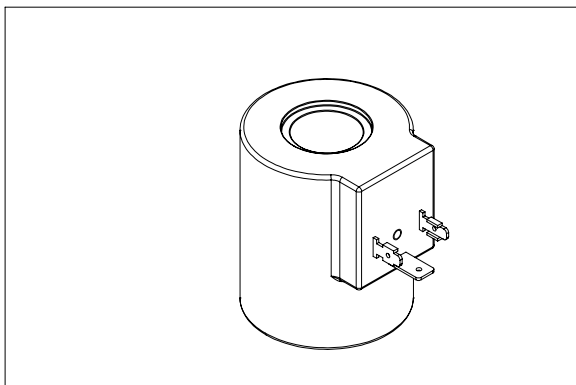

COILS TYPE

The coils have the magnetic circuit coated with black thermoplastic material. All metal parts are protected against oxidation according to RoHS directive. For proper insulation it is required to install the proper seals supplied with the tubes.

TECHNICAL DATA

Protection type	IP 65 with all seal
Protection type	IP 69K with all seal only DT
Alimentation tolerance	+10%
Ambient temperature	-20°C + 50°C
Duty cycle	100% ED (max 40°C ambient)
Isolation class	Class H (max 180°C)
Weight	0,18 kg


Coils are available with three different connections type, special voltage are available on request, please contact AFT sales network.

- (1) Ambient temperature 25°C
- (2) Ambient temperature 20°C

OVERALL DIMENSIONS


HIRSCHMANN (HR)

Coils		Max winding temperature (1)	Nominal potency	Resistance (±7%) (2)	Code parts
Code	Voltage				
A	12 V DC	135°C	23 W	6.3	AB000137
B	24 V DC	135°C	23 W	25	AB000138
C	48 V DC	135°C	23 W	100.2	
D	110 R AC	120°C	23 W	526	
E	220 R AC	120°C	23 W	2104.3	

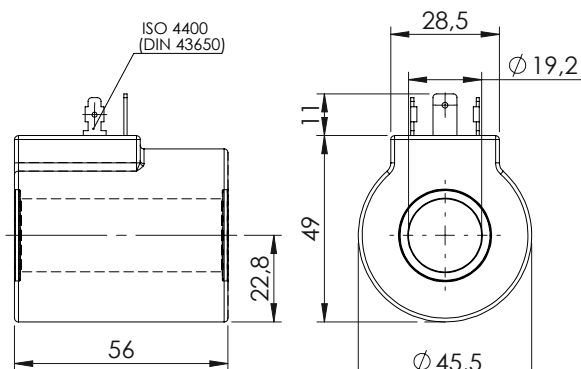


DEUTSCH (DTV)

Coils		Max winding temperature (1)	Nominal potency	Resistance (±7%) (2)	Code parts
Code	Voltage				
A	12 V DC	135°C	23 W	6.3	AB000141
B	24 V DC	135°C	23 W	25	AB000142
C	48 V DC	135°C	23 W	100.2	
D	110 R AC	120°C	23 W	526	
E	220 R AC	120°C	23 W	2104.3	

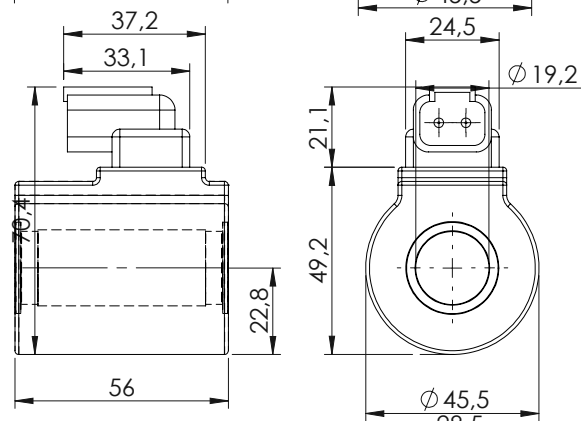


AMP JUNIOR (AJ)

Coils		Max winding temperature	Nominal potency	Resistance (±7%)	Code parts
Code	Voltage				
A	12 V DC	135°C	23 W	6.3	AB000139
B	24 V DC	135°C	23 W	25	AB000140
C	48 V DC	135°C	23 W	100.2	
D	110 R AC	120°C	23 W	526	
E	220 R AC	120°C	23 W	2104.3	

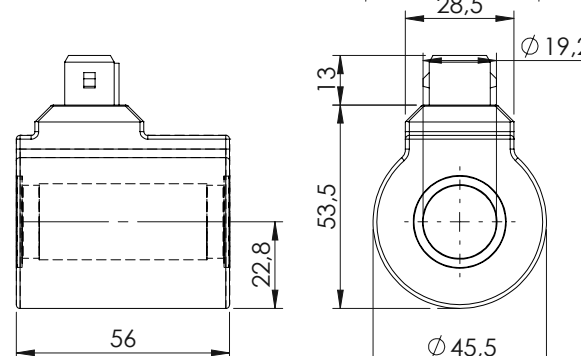


CONNECTORS

CONNECTOR FOR SOLENOID VALVE

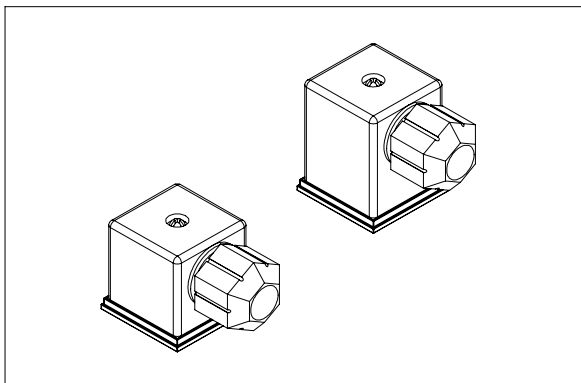

Connector for solenoid valve according to standards DIN 43650 / ISO 4400, different types of circuits are available, standard circuit, circuit with "VDR", circuit with "VDR+ rectifier" or circuit with LED


ELECTRIC SCHEME

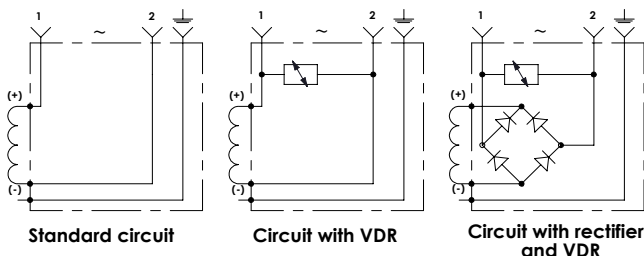

TECHNICAL DATA

Voltage rating	AC/DC: up to 250/300 V max
Max current	16.0 A
Contact resistance	≤ 4 mΩ
Max conductor	1.5 mm ²
Cable range	Ø4.0 to Ø9.0 mm
Protection class	IP 67 EN60529
Seal	Nitrile rubber
Poles	2 plus ground
Connector	EN 175301-803 (DIN 43650)

OVERALL DIMENSIONS

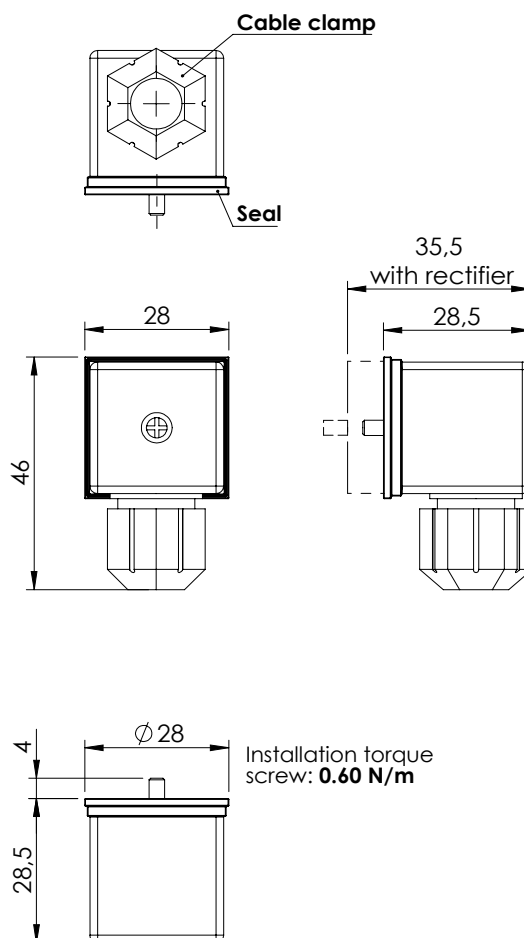


ORDERING DETAILS: SEPARATE ELEMENTS

Quick code	Colour	VDR	LED	Rectifier	Voltage
PV000171	Black	No	No	No	12V to 230V
PV000195	Black	Yes	No	No	12V dc
PV000349	Black	Yes	No	No	24V dc
PV000198	Trasparent	Yes	Yes	No	12V dc
PV000196	Trasparent	Yes	Yes	No	24V dc
PV000347	Black	Yes	No	Yes	12V RAC
PV000348	Black	Yes	No	Yes	24V RAC
	Black	Yes	No	Yes	110V RAC
	Black	Yes	No	Yes	220V RAC
	Trasparent	Yes	Yes	Yes	110V RAC
	Trasparent	Yes	Yes	Yes	220V RAC

NB: To have full performance and to guarantee the IP 65 level of protection, it is essential to assemble connectors with the supplied seals and with screw properly installed.

EB - ORDERING PART SECTION

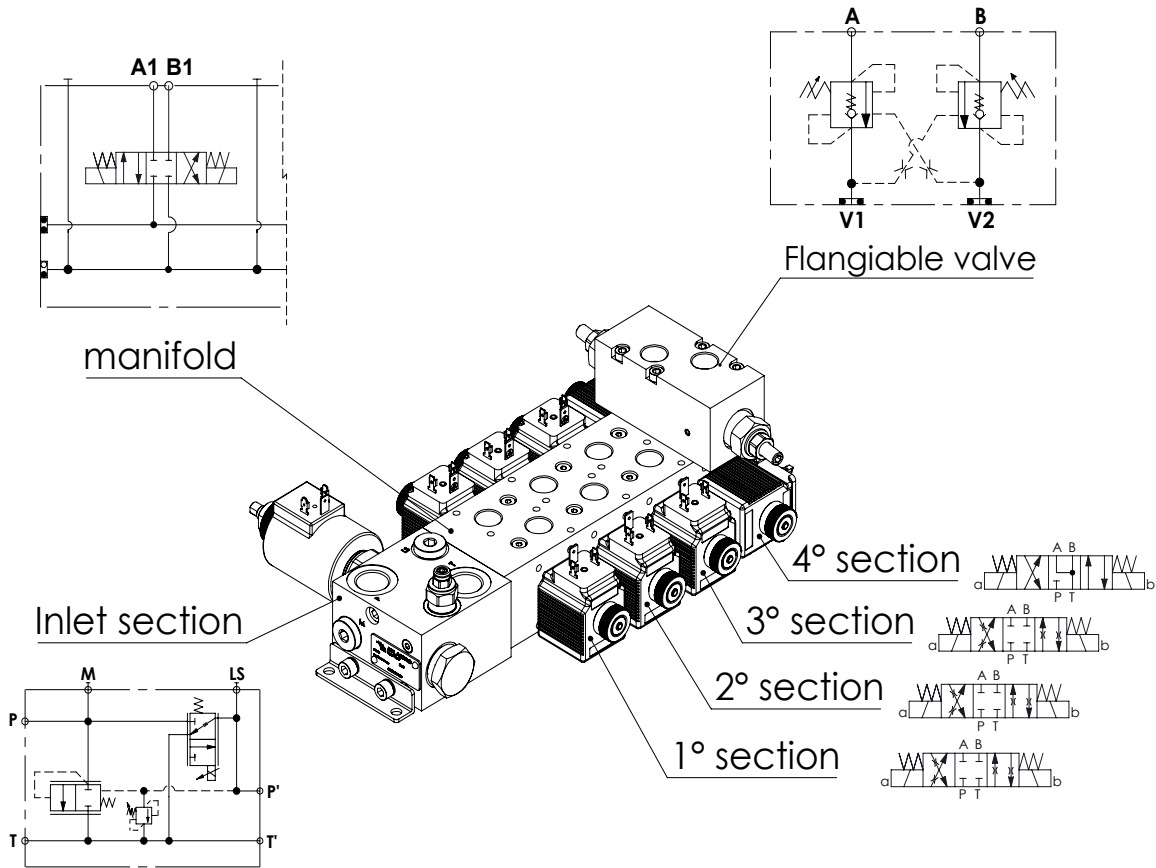

ORDER CODE

	QUICK CODE OR DESCRIPTION	COIL QUICK CODE OR DESCRIPTION
INLET SECTION		
MANIFOLD		
SPOOL SECTION 1		
FLANGEABLE VALVE SECTION 1		
SPOOL SECTION 2		
FLANGEABLE VALVE SECTION 2		
SPOOL SECTION 3		
FLANGEABLE VALVE SECTION 3		
SPOOL SECTION 4		
FLANGEABLE VALVE SECTION 4		
SPOOL SECTION 5		
FLANGEABLE VALVE SECTION 5		
SPOOL SECTION 6		
FLANGEABLE VALVE SECTION 6		
SPOOL SECTION 7		
FLANGEABLE VALVE SECTION 7		
SPOOL SECTION 8		
FLANGEABLE VALVE SECTION 8		
COILS		
OPTIONS		
OPTIONS		