


CHILD COUPLING END STYLE NOMENCLATURE



Child couplings feature description by combining end-style codes shown below that make thread end identification fast and easy. Always refer to Child Crimp Data Charts when selecting hose and coupling combinations.

In the following example, the Child description **SFJ90C-0906SS** identifies a Supercrimp Female JIC swivel 90° Close drop Stainless Steel coupling for -09 (9/16") thread and -06 (3/8") hose size (Child couplings indicate thread size first).

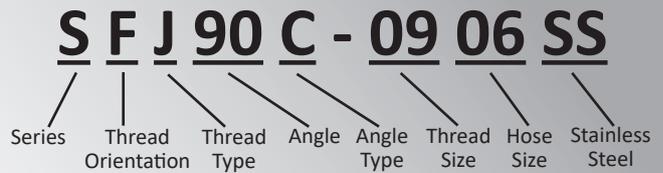

Code	Description
Series	
E	Ezicrimp – 1 Piece
S	Supercrimp – 2 Piece
C5	Field-Fit – Suit R5 Hose
C5E	Field-Fit – Suit R5E Hose
R	Field-Fit – Suit G1,G2, R3 Hose
L	Lock-On – Suit Pushlock Hose
Thread Orientation	
F	Female
M	Male
Thread Type	
B	BSP Tapered
DKL	DIN Light Series
DKS	DIN Heavy Series
DKO	DIN Heavy Series & O-Ring
FL	Flange Code 61
FLH	Flange Code 62
FLK	Flange Komatsu
FO	Flat Face O-Ring (ORFS)
G	Grease Fitting
GAZ	French GAZ
HJ	Hose Joiner
IX	Inverted Flare
J	JIC
K	JIS-Metric (Japanese)
LS	Life Saver
N	NPT
NF	NPT – Female Fixed

Code	Description
Thread Type (Continued)	
NL	NPT – Long Series
NP	JIS-BSPP (Japanese)
OX	SAE O-Ring Boss Swivel
P	BSP Parallel
R	Encapsulated O-Ring (BSPP)
S	SAE
SS	Staple Series
Angle	
(None)	Straight
22	22.5° Bend
30	30° Bend
45	45° Bend
60	60° Bend
67	67.5° Bend
90	90° Bend
110	110° Bend
135	135° Bend
Angle Type	
(None)	Standard Drop
C	Close Drop
S	Short Drop
M	Medium Drop
L	Long Drop
Material or Special Request	
(None)	Steel
SS	Stainless Steel
Z	Special Request