




HYDRAULIC MOTORS

GEAR MOTORS 60 SERIES Specifications Sheet



The CROSS series 60 gear type motors feature advanced design concepts which produce long service life and high reliability when operated up to rated speeds and pressures. Improved gear tooth design and pressure-balanced loading plates provide for a high volumetric and overall efficiency, while operating at a low noise level.

GENERAL SPECIFICATIONS

Displacement sizes

4.05	5.15	6.15	7.15	8.15	9.25	cu.in./Rev.
66.4	84.4	100.8	117.2	133.6	151.6	cc/Rev.

Rated working pressure (Max. relief valve setting at full flow) 3000 psi (207 bar)
Maximum shock and surge pressure 3500 psi (242 bar)
Maximum flow rate (input) 108 gpm (409 l/m)
Maximum speed (continuous) up to 3,000 rpm
Maximum horsepower (at rated speed and pressure) 189 hp (148 Kw)
Mounting (any position) SAE "C" size, 2 and 4-bolt
Weight Approx. 42 lbs. (19 Kg)

MATERIAL SPECIFICATIONS

End covers Die cast aluminum alloy
Gears and shafts Hardened steel
Bearings Pressure lubricated, Teflon impregnated sleeve
Seals Buna N
Body Permold aluminum alloy

STANDARD FEATURES

- Rotation: Bi-directional (Dual Rotation) • Ports: 1 1/2" SAE #24, o-ring (1 7/8 - 12 side location • 1/4" NPTF drain port • Internal check valves (no external drain required if back pressure is below shaft seal rating) • Shaft: 1 1/4" dia. with straight key • Shaft seal: 250 psi (17 bar)

OPTIONAL FEATURES AVAILABLE

- Rotation: Right hand (clockwise); Left hand (counterclockwise)
- Ports: Straight thread inlet and outlet, rear location; 1 1/4" and 1 1/2" split flange side ports, inlet and outlet
- Shaft: 1 1/4" splined (14 tooth, 12/24 pitch, 30° P.A. flat root side fit)

NOTE: Refer to CROSS pump and motor technical/service sheet for side and end load limitations, oil recommendations, start-up procedures, etc.






1800-OILSOL
1800-645765

<https://oilsolutions.com.au/>

sales@oilsolutions.com.au


DIMENSIONAL DATA in inches and (millimeters)

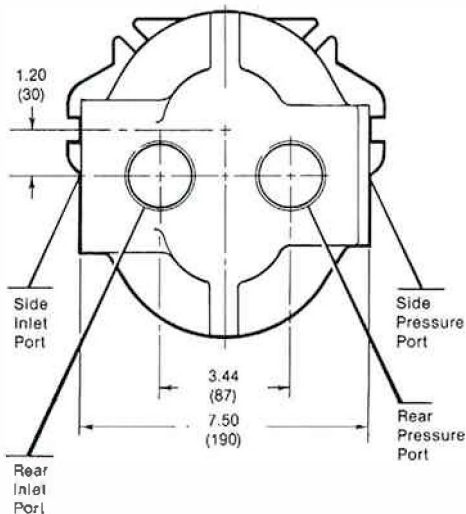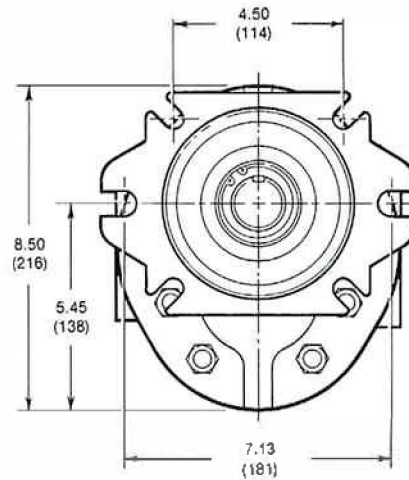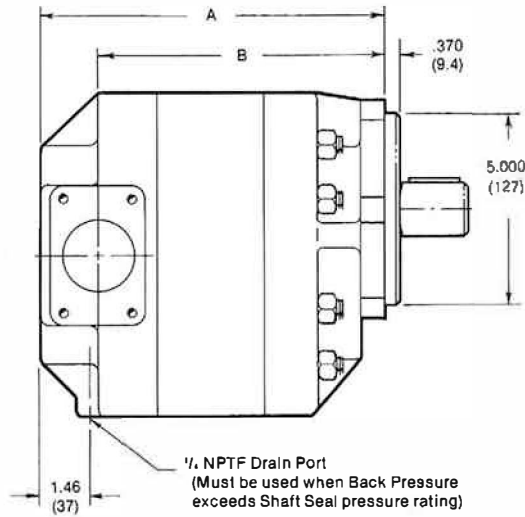

Displacement		Dimension "A"		Dimension "B"	
cu.in./Rev.	cc/Rev.	Inches	mm	Inches	mm
4.05	(66.4)	7.75	(197)	6.24	(158)
5.15	(84.4)	8.00	(203)	6.50	(165)
6.15	(100.8)	8.27	(210)	6.77	(172)
7.15	(117.2)	8.52	(216)	7.02	(178)
8.15	(133.6)	8.77	(223)	7.27	(185)
9.25	(151.6)	9.05	(230)	7.55	(192)


OUTPUT SHAFT

SHAFT A



Splined, 14 tooth,
12/24 pitch, 30°
pressure angle, flat root
side fit, Class 6.
Diameter 1.25"
(31.75)

SHAFT C (Standard)



Keyway for straight key
is .3120 inches wide,
and .160 inches deep.
Diameter 1.25"
(31.75)




HYDRAULIC MOTORS

GEAR MOTORS 60 SERIES


TYPICAL PERFORMANCE DATA

(FOR SPECIFIC PERFORMANCE DATA,
CONTACT CROSS ENGINEERING)


MODEL 60M040

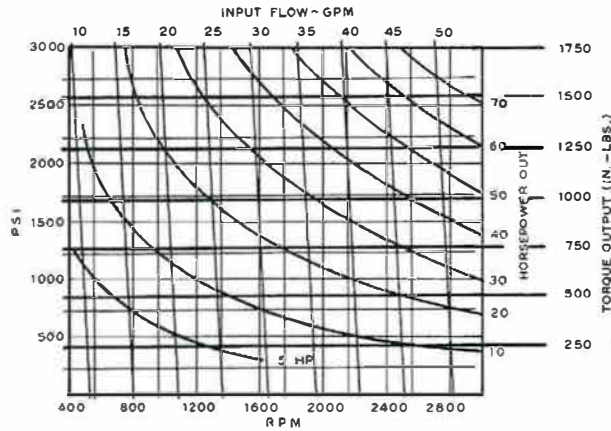


MODEL 60M071

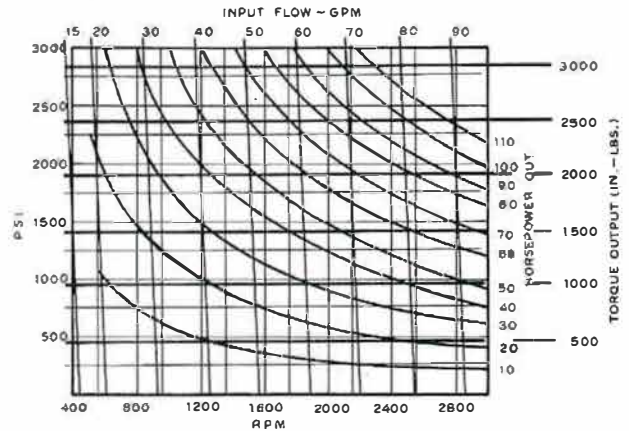


MODEL 60M051

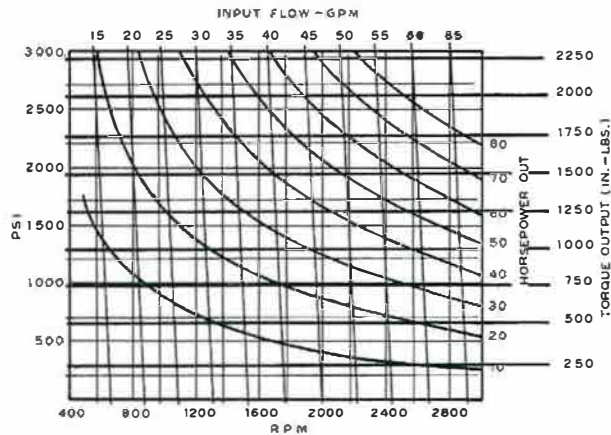


MODEL 60M081

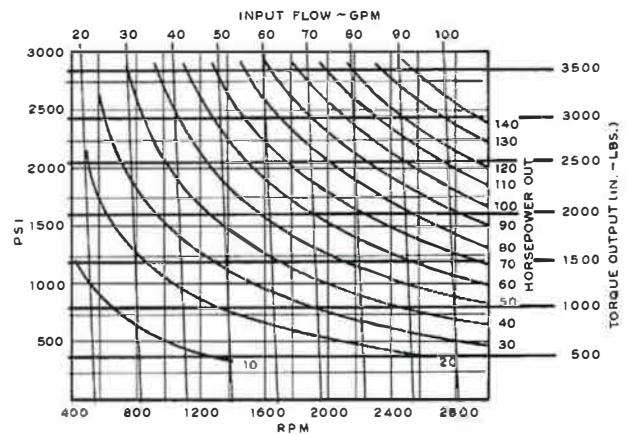

MODEL 60M061

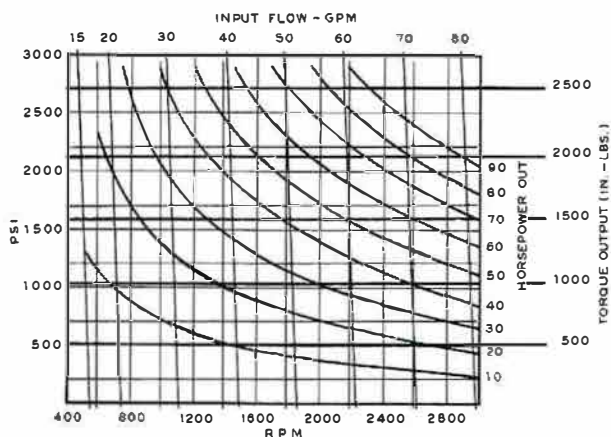

MODEL 60M092

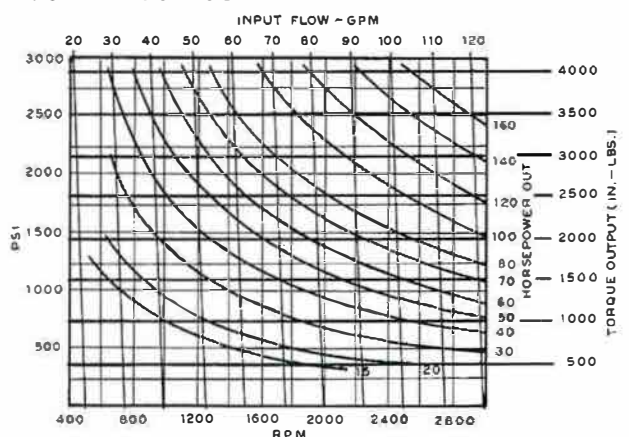

1800-OILSOL
1800-645765

<https://oilsolutions.com.au/>


sales@oilsolutions.com.au




TYPICAL PERFORMANCE DATA

(FOR SPECIFIC PERFORMANCE DATA,
CONTACT CROSS ENGINEERING)

STARTING TORQUE (in.-lbs.) vs. PRESSURE (PSI)

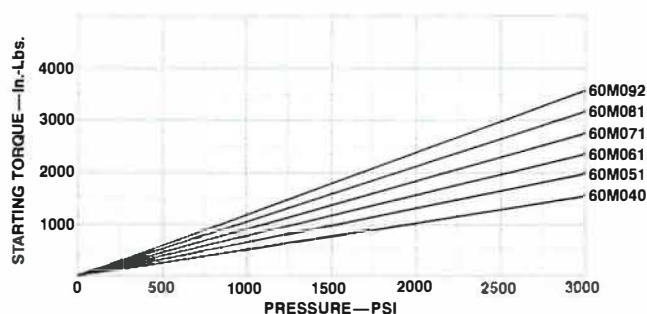

VOLUMETRIC EFFICIENCY vs RPM at 120° F

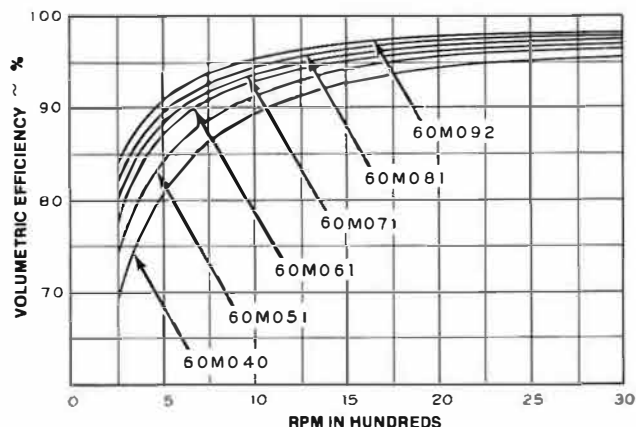

ORDERING DATA

Series	Type	Special Options	Size cu.in./ Rev. x 10	Rotation	Mounting	Shaft Size & Type	Port Location, Size & Type Inlet and Outlet	
60	M motor	H 250 psi Shaft Seal	40	D dual	C SAE 2 & 4 bolt combin- ation	A 1 1/4 dia. splined C 1 1/4 dia. straight keyway	SF 1 7/8 - 12 SAE #24 SH 1 1/2" spl. flg.	SIDE PORTS
			51	L left				
			61	R right				
			71					
			81					
			92					
							RK 1 7/8 - 12 SAE #24	REAR PORTS

EXAMPLE: 60MH40DCCSF

Describes a Series 60 Gear Motor with 250 psi shaft deal; displacement of 4.0 cu. in. per revolution; bi-directional rotation; combination SAE two and four bolt "C" mount; 1 1/4" dia. shaft with straight keyway and 1 7/8 - 12 side ports.



CROSS MANUFACTURING, INC.

100 James H. Cross Blvd.

Lewis, Kansas 67552

Phone 620/324-5525; FAX 620/324-5737; e-mail: info@crossmfg.com



1800-OILSOL
1800-645765


<https://oilsolutions.com.au/>

sales@oilsolutions.com.au



HYDRAULIC PUMPS

GEAR PUMPS 60 Series Specification Sheet



The CROSS Series 60 gear pumps, with a maximum of 175 hp., feature a gear tooth design that provides more displacement within a given package design. Displacements from 4.05 to 9.25 cu. in./rev. are offered in 6 sizes with the largest delivering 100 gpm in a space less than 8" x 8½" x 9¼". Gear tooth design and pressure-balanced loading plates provide high volumetric and overall efficiency while operating at a low noise level.

GENERAL SPECIFICATIONS

Displacement sizes:

4.05	5.15	6.15	7.15	8.15	9.25	cu.in./Rev.
66.4	84.4	100.8	117.2	133.6	151.6	cc/Rev.

Rated working pressure (Max. relief setting at full flow) 3000 psi (207 bar)
Maximum shock and surge pressure 3500 psi (242 bar)
Maximum flow rate (delivery) 90 gpm (341 l/m)
Maximum speed (Continuous - see Inlet Vacuum Curves). Up to 3000 rpm
Maximum horsepower (at rated speed and pressure). 175 hp (130 kw)
Mounting (any position). SAE "C" size (2 and 4-bolt)
Weight Approx. 42 lbs. (19 kg)

MATERIAL SPECIFICATIONS

End covers Die cast aluminum alloy
Gears and shafts Hardened steel
Bearings Pressure lubricated, Teflon impregnated sleeve
Seals Buna N
Body Permold aluminum alloy

STANDARD FEATURES

- Rotation: Left hand (counterclockwise), right hand (clockwise) or bi-directional (dual)
- O-ring ports: 1½" SAE #24 (1⅞ - 11) side location
- Shaft: 1¼" dia. with straight key • Shaft seal: 20 psi (1.4 bar)*

OPTIONAL FEATURES AVAILABLE

- Ports, straight thread inlet and outlet, rear port location, 1½" and 2" split flange side ports, inlet and outlet • Shaft: 1¼" splined (14 tooth, 12/24 pitch, 30° P.A. flat root, side fit) • Shaft seal: high pressure, 250 psi (17.2 bar)*

NOTE: Refer to Cross pump and motor technical/service sheet for side and end load limitations, oil recommendations, start-up procedures, etc.

* Dual rotation pumps are provided with 100 psi shaft seal.




1800-OILSOL
1800-645765

<https://oilsolutions.com.au/>

sales@oilsolutions.com.au




DIMENSION DATA
in inches and (millimeters)

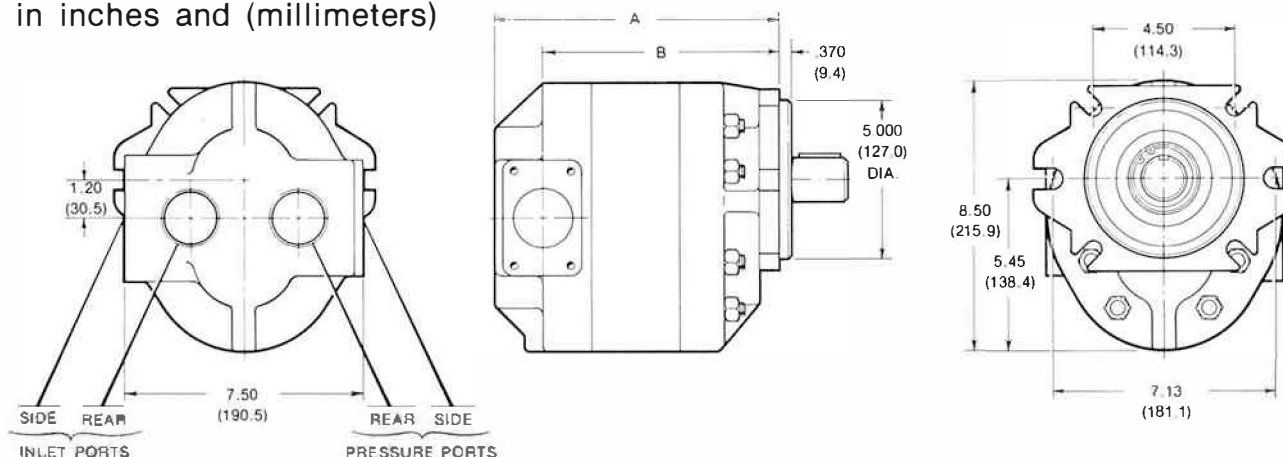


Displacement	4.05 (66.4)	5.15 (84.4)	6.15 (100.8)	7.15 (117.2)	8.15 (133.6)	9.25 (151.6)	cu.in./Rev. cc/Rev.
Dimension "A"	7.75 (197.0)	8.00 (203.2)	8.27 (210.1)	8.52 (216.4)	8.77 (222.8)	9.05 (229.9)	inches mm
Dimension "B"	6.24 (158.5)	6.50 (164.1)	6.77 (172.0)	7.02 (178.3)	7.27 (184.7)	7.55 (191.8)	inches mm

OUTPUT SHAFT

Shaft A



Shaft C*

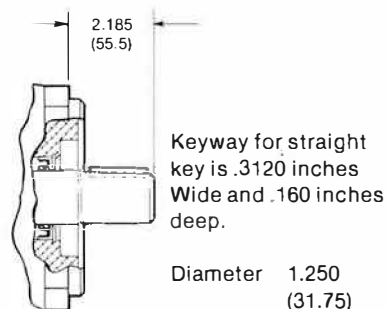

Port Location, Size and Type			
Inlet		Outlet	
SA	1½ (SAE #24)	1¼ (SAE #20)	SIDE
SB	1½" Spl. Flg.	1¼" Spl. Flg.	
SC*	2" Spl. Flg.	1¼" Spl. Flg.	
SF	1½ (SAE #24)	1½ (SAE #24)	
SH	1½" Spl. Flg.	1½" Spl. Flg.	
RK	1½ (SAE #24)	1½ (SAE #24)	REAR

ORDERING DATA

Series	Type	Special Options	Size cu.in./Rev. x 10	Rotation	Mounting	Shaft size and type
60	P pump	O 20 psi Shaft Seal B 100 psi Shaft Seal (Std. for dual rotation) H 250 psi Shaft Seal	40 51 61 71 81 92	D dual L Left R Right	C SAE "C" 2 & 4 Bolt combi- nation	A 1 1/4" dia. splined C 1 1/4" dia. straight keyway

EXAMPLE: 60P040RCCSC is a 60 series pump with 20 psi shaft seal, 4.05 cu. in. displacement per rev., right hand rotation, SAE "C" 2 and 4 bolt combination mounting with 2" split flange side inlet and 1 1/4" split flange side outlet.




HYDRAULIC PUMPS


GEAR PUMPS 60 Series

TYPICAL PERFORMANCE DATA


MODEL 60P040

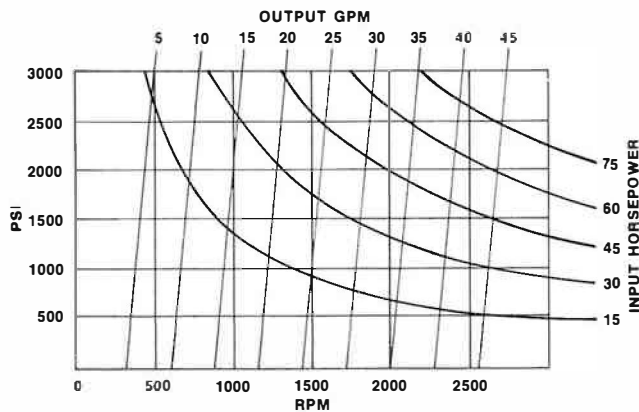


MODEL 60P071

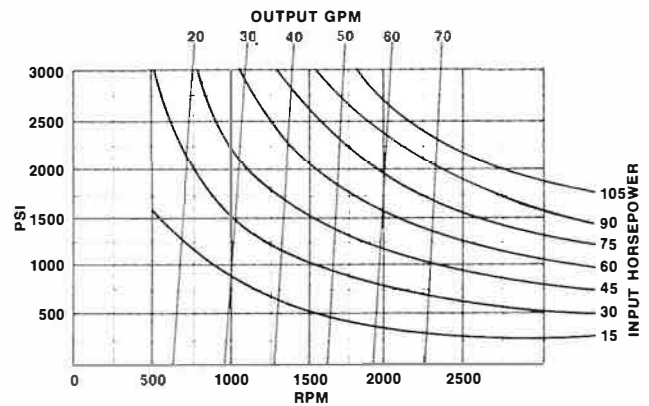


MODEL 60P051

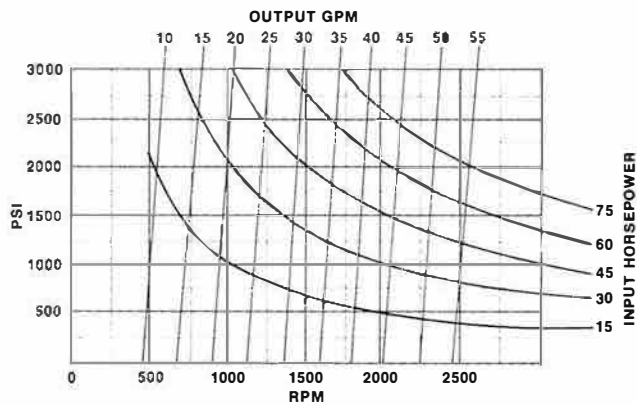


MODEL 60P081

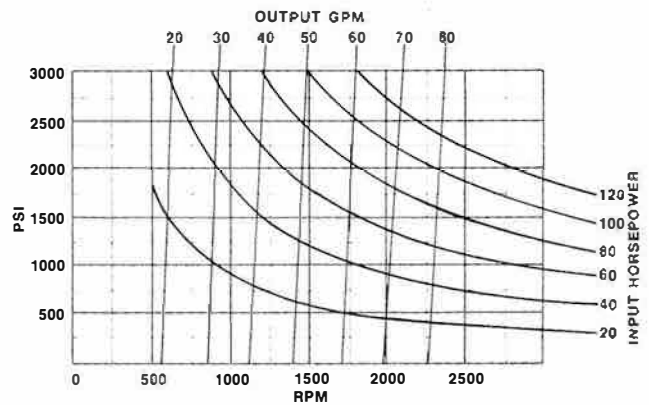

MODEL 60P061

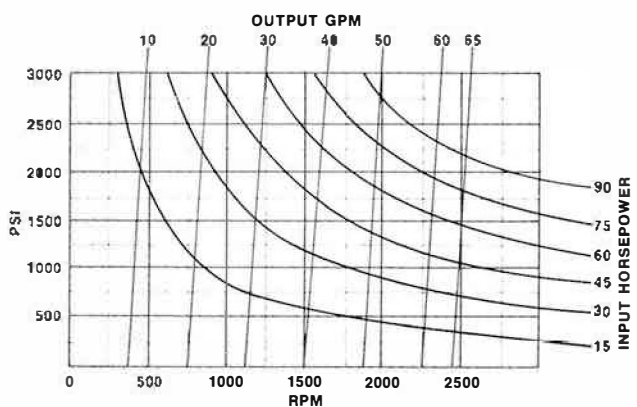


MODEL 60P092

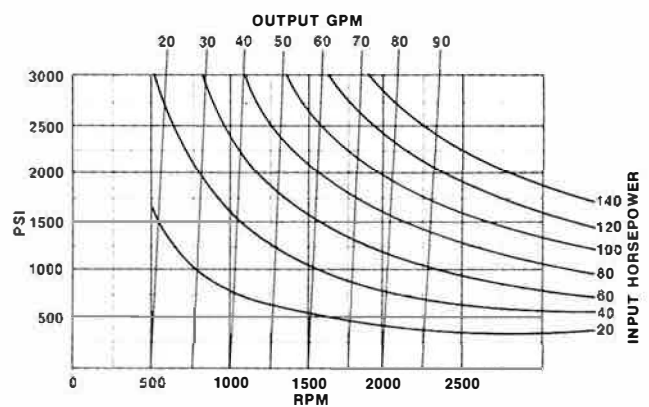


TYPICAL PERFORMANCE DATA


MODEL 60P040

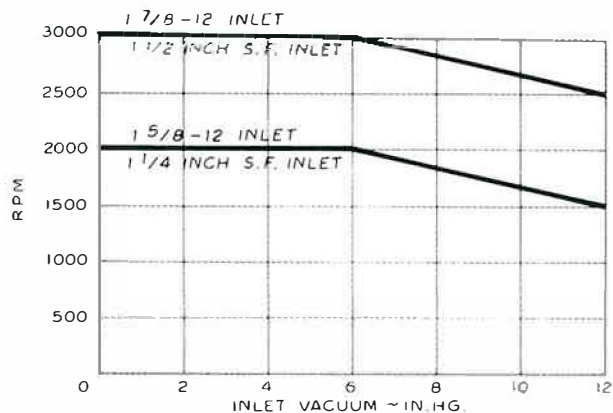


MODEL 60P071

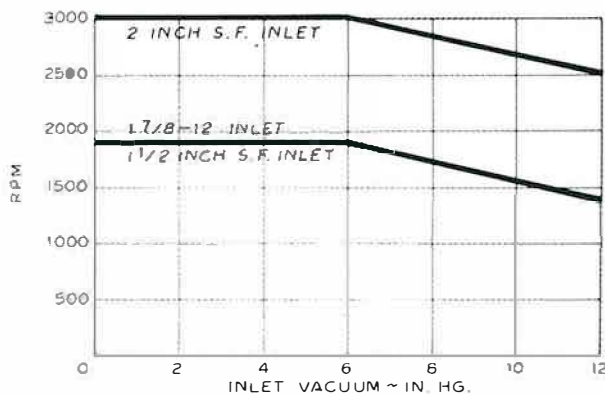


MODEL 60P051

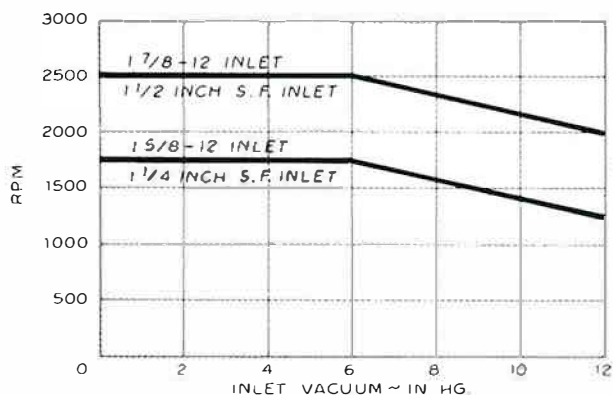


MODEL 60P081

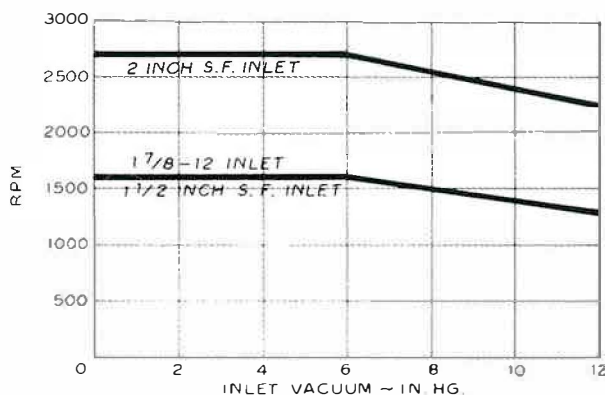

MODEL 60P061

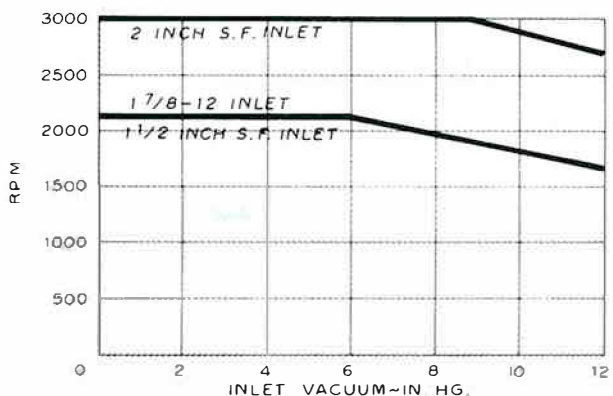

MODEL 60P092

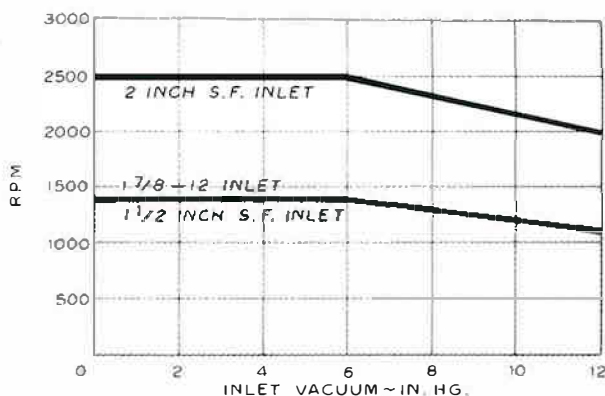

CROSS MANUFACTURING, INC.
100 Factory Street
Lewis, Kansas 67552
Phone: 620-324-5525



1800-OILSOL
1800-645765

<https://oilsolutions.com.au/>

sales@oilsolutions.com.au