




CROSS HYDRAULIC RELIEF VALVES

PILOT OPERATED TYPE RV SERIES Specification Sheet



RV 2



1R0002

The CROSS series RV pilot operated relief valves have been designed to provide good response with low differential between opening and full flow pressures. These units give smooth, quiet operation and a built-in pilot flow filter provides trouble free operation.

GENERAL SPECIFICATIONS

Pressure range	400 psi (28 bar) to *3000 psi (207 bar)
Maximum flow capacity	40 gpm (114 l/m)
Weight	4 lbs. (1.8 Kg)
	*with SAE ports

MATERIAL SPECIFICATIONS

Housing	High tensile strength gray iron
Poppet	Hardened and ground steel
Seals	Buna N

STANDARD FEATURES

- 1¹/₁₆ - 12 (3³/₄" SAE #12) straight thread o-ring ports
- Screw adjustment with knob (for frequent adjustment)
- Bodied, "in-line" mounting, with mounting holes for 5⁵/₁₆" dia. bolts

OPTIONAL FEATURES

- 7⁷/₈ - 14 (5⁵/₈" SAE #10) straight thread o-ring ports
- 3³/₄" NPTF dry seal pipe thread ports
- Cartridge type, for installation in machined housing
- Screw adjustment with acorn nut (for infrequent adjustment)

STYLES AVAILABLE

RV1: RV series, with body, with screw adjustment and acorn nut

RV2: RV series, with body, with screw/knob adjustment

1R0001: RV series, cartridge only, with screw adjustment and acorn nut

1R0002: RV series, cartridge only, with screw/knob adjustment





1800-OILSOL
1800-645765

<https://oilsolutions.com.au/>

sales@oilsolutions.com.au




DIMENSIONAL DATA inches and (millimeters)

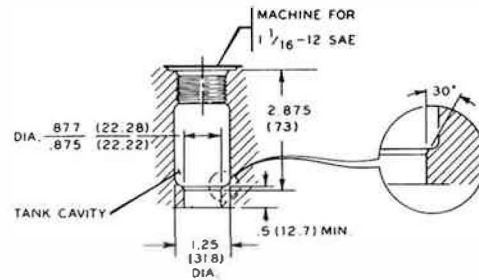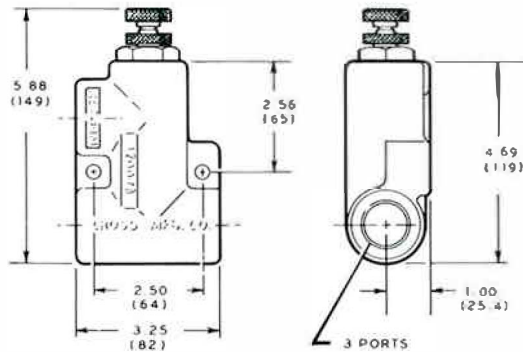

MACHINING DIMENSIONS FOR CARTRIDGE

TYPICAL PERFORMANCE DATA

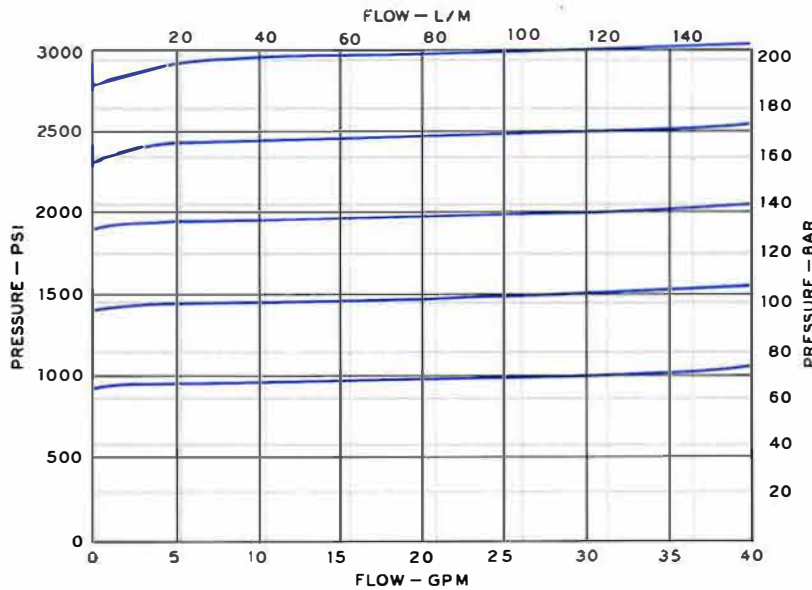

100 SSU oil at 120° F

ORDERING DATA

SERIES	ADJUSTABLE	PORT SIZE & TYPE	PRESSURE SETTING (psi) (at 10 gpm)
RV	1 Adjustable w/acorn nut	1-3/4" NPTF	A - 500 psi B - 1000 psi C - 1500 psi D - 2000 psi E - 2500 psi F - 3000 psi G - Other psi
	*2 Adjustable w/knob	2-5/8" SAE #10 7/8 - 14	
		*3-3/4" SAE #12 1 1/16 - 12	
RV	X	X	X

*Standard



CROSS MANUFACTURING, INC.

100 Factory Street

Lewis, Kansas 67552

Phone 620/324-5525; FAX 620/324-5737; e-mail: info@crossmfg.com



1800-OILSOL
1800-645765

<https://oilsolutions.com.au/>

sales@oilsolutions.com.au