
PRODUCT NEWS FLASH

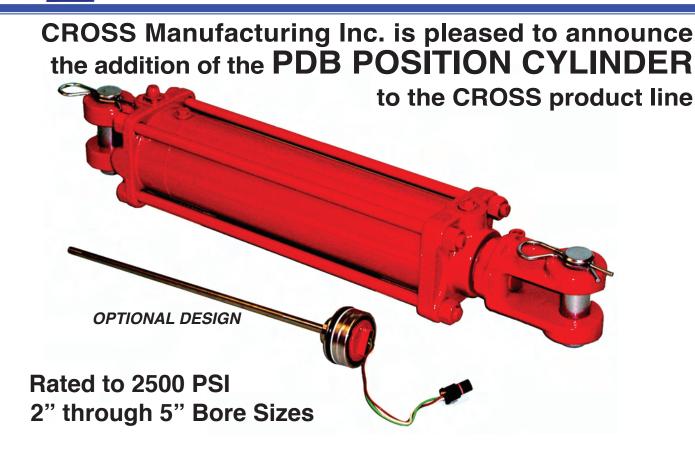

Sensor:

CROSS

- Non-Contact and Absolute Measurement
- Output Options: Analog: Voltage, Current Digital: J1939
- Sensor Voltage Supply: 12/24 Vdc

All Sensor components (except for electrical connector) may be embedded internally within the CROSS cylinder for superior durability and long field life

Sample Applications:

- Loader Bucket Angle & Height
- Paver Height
- 3 Point Hitch Position
- Steering Control

- Leveling Jacks
- Marine Steering
- Snow Plow Blade Control
- Trash Truck Automation

Call, write or e-mail us. We invite your inquiries and look forward to serving your needs!



CROSS MANUFACTURING, INC.

100 James H. Cross Blvd. Lewis, KS 67552 Phone 620/324-5525, FAX 620/324-5737; e-mail: info@crossmfg.com



1800-OILSOL 1800-645765

OL <u>https://oilsolutions.com.au/</u>

sales@oilsolutions.com.au