

Battery Charger Rocket Flex

Product description

The battery charger also works as a holder for the Rocket Flex. The charger can be assembled on the machine with a 1/4" UNC screw, same as RAM-Mount Size B holders. While the Rocket Flex is charging the blue LED is flashing. When charging is finished, the blue LED is lit. The charger is delivered with a 1.8meter cable with open wires.

Illustration




IMPORTANT!

During charging, the ambient temperature needs to be between +5° and +45°C.
~ 41°F to +113°F

Technical data

Power Supply	9-36 VDC	
IP-Class	IP21	
Overload protection	Yes (still recommended to use a 3A fuse)	
Current consumption	<15mA (idle) 200-900mA during charging (depending on supply voltage)	
Charging time	2 hours and 20 minutes	
Cable length	1,8 m	
Assembly	1/4" UNC (Suited for RAM-Mount Size B)	
Ambient temperature	-20°C to +70°C	~ -4°F to +160°F
Charging temperature	+5°C to +45°C	~ 41°F to +113°F
Dimensions	70 x 35,5 x 113 mm	2,75 x 1,4 x 4,45 in
Weight	70 g	~ 0.2 lbs

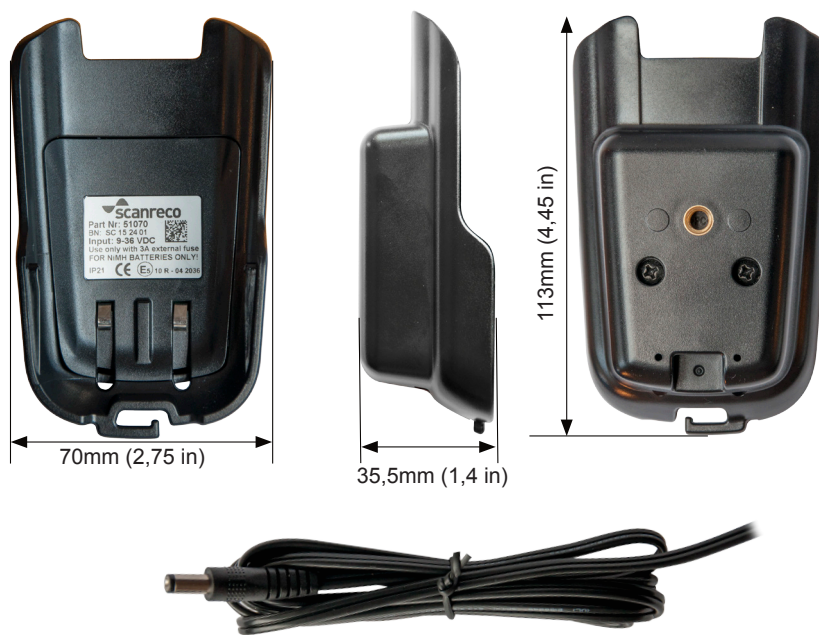

Order information

Part number	Description
51070	Battery Charger for Rocket Flex (incl cable)
46207	Cable for charger (spare part)