



OIL SOLUTIONS

---

**PO Box 38**  
**Strathfieldsaye, VIC, 3551**  
**1800 OIL SOL**  
**1800 645 765**  
**[sales@oilsolutions.com.au](mailto:sales@oilsolutions.com.au)**  
**[www.oilsolutions.com.au](http://www.oilsolutions.com.au)**  
**"For All Your Hydraulic Needs"**

# **Technical Information**

## **ATEX certified OMR**



# Contents

<b>Chapter 1: General Information.....</b>	<b>5</b>
ATEX introduction.....	6
Explosive atmosphere.....	6
Explosion triangle.....	6
General zone classification.....	6
Equipment category and zones.....	7
Marking of motors.....	8
 <b>Chapter 2: T codes / Maximum surface temperature.....</b>	 <b>11</b>
T codes and maximum surface temperature for OMR motors.....	12
 <b>Chapter 3: Versions and code numbers.....</b>	 <b>13</b>
OMR motors.....	14
 <b>Chapter 4: Technical specification - ATEX OMR motors.....</b>	 <b>15</b>
Ambient temperature.....	16
Oil types / Operating fluids.....	16
Mineral oils.....	16
Oil temperature.....	16
Viscosity.....	16
Filtering.....	17
 <b>Chapter 5: Cross list.....</b>	 <b>19</b>
OMR motor cross list.....	20
 <b>Chapter 6: Declaration.....</b>	 <b>21</b>



---

# Chapter

# 1

---

## General Information

---

### Topics:

- [ATEX introduction](#)
  - [Explosive atmosphere](#)
-

## ATEX introduction

---

Hydraulic Orbital Motors are designed for mobile and stationary applications. Some motors are used in related applications, where locations are classified as hazardous areas.

The ATEX Directive 2014/34/EU specifies the minimum safety requirements for equipment intended for use in potentially explosive atmospheres in European Union member states. ATEX is derived from the French term “ATmosphères EXplosives”.

The equipment intended for use in hazardous areas are divided into two groups:

**Group I:** Equipment intended for use in underground parts of mines (mining equipment).

**Group II:** Equipment intended for use in other places than mines (non-mining equipment).


The hydraulic orbital motors are intended for use in Group II applications.

## Explosive atmosphere

---

### Explosion triangle

A “hazardous area” is defined as an area in which the atmosphere contains, or may contain in sufficient quantities, flammable or explosive gases, dusts or vapours. In such an atmosphere a fire or explosion is possible when three basic conditions are met. This is often referred to as the “hazardous area” or “explosion” triangle.

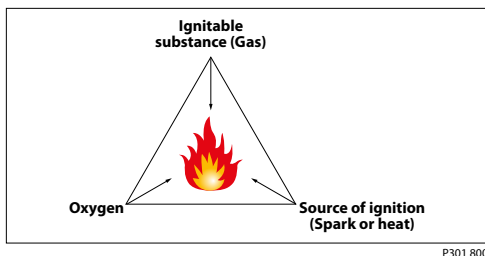


P301 800

An atmosphere with the potential to become an explosive atmosphere during operating conditions and/or under the influence of the surroundings is defined as a potentially explosive atmosphere. Products covered by directive 2014/34/EU are defined as intended for use in potentially explosive atmospheres. Removing one of the elements eliminates all risk of explosion.

### General zone classification

Directive 99/92/EC divides the Hazardous areas into zones and defines criteria by which products are categorized within these zones; Zone 0 / 20 is the most restrictive and Zones 1 / 21 and 2 / 22 are less restrictive. The following table describes the zones in an installation where there is a potential for explosive atmospheres. The owner of the installation must analyze and assess the area in which the explosive gas/dust mixture may occur, and if necessary must divide it into zones. This process of zoning then allows the correct plant and equipment to be selected for use in the area.

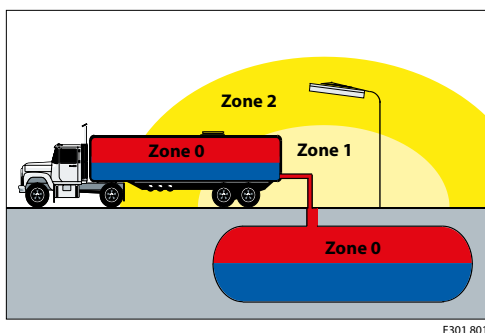

F301 801

Zones		Presence of potentially explosive atmosphere	Type of risk
Gas (G)	Dust (D)		
0	20	Present continuously or for long periods	Permant
1	21	Likely to occur in normal operation occasionally	Potential
2	22	Not likely to occur in normal operation but. If it does occur, will persist for a short period of time	Minimal

## Equipment category and zones

Mechanical components with potential ignition sources e.g. components containing non-conductive materials or layers or components with hot surface are covered by the ATEX-directive.

Non-mining equipment for potentially explosive atmosphere is classified as:

Equipment Group II – this group comprises three categories according to the level of safety provided:

- Category 1
- Category 2
- Category 3

Category 1 equipment has the highest degree of protection – see the following below.


Degree of protection	Protection	Category
Very high	Two independent protection measures or safe if two errors occur independently	<b>Category 1</b>
High	Safe in normal operation and in anticipated case of commonly occurring errors	<b>Category 2</b>
Normal	Safe in normal operation	<b>Category 3</b>

P301 802

These products have to fulfil all requirements in the ATEX directive, and have to be marked with the required “Ex” marking.


Equipment located in zone specified areas must fulfil the following requirements (see also the following figure):

- Category 3 – approved equipment can be installed in hazardous areas zone 2 / 22 and outside zone categorized areas.
- Category 2 – approved equipment can be installed in hazardous areas zone 1 / 21, zone 2 / 22 and outside zone categorized areas.
- Category 1 – approved equipment can be installed in hazardous areas zone 0 / 20, zone 1 / 21, zone 2 / 22 and outside zone categorized areas.

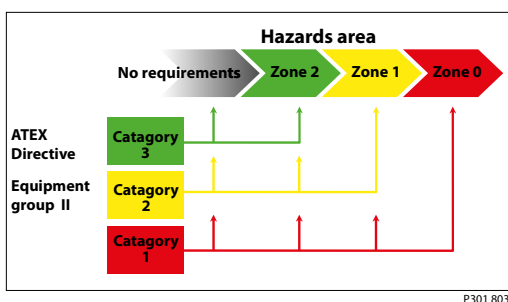

## Marking of motors


The OMR motors are marked for application gaseous and dusty environments according to the below:

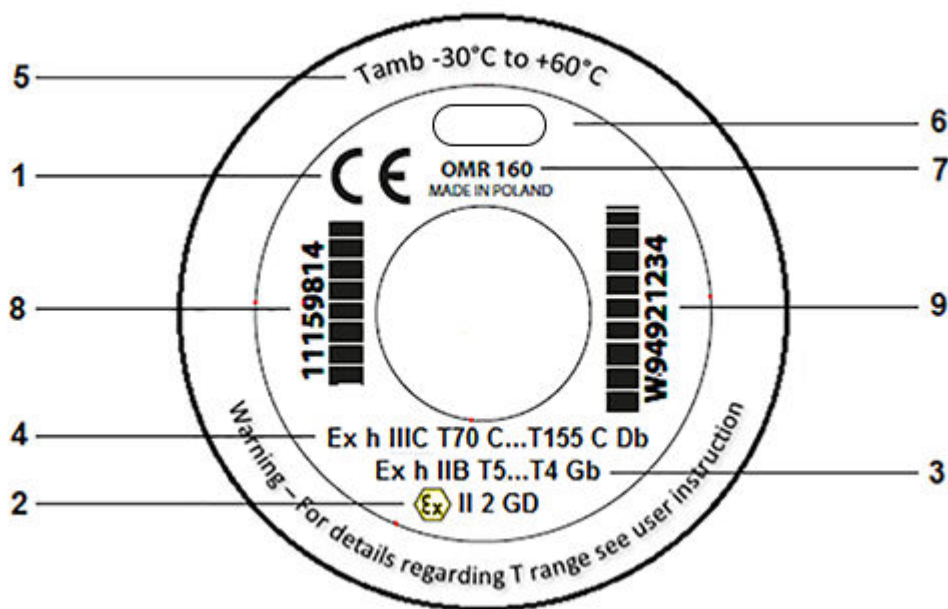

**Figure 1: ATEX label layout**

Key to label image:

1. CE Conformity marking
2. EU marking (per 2014/34/EU) - Directive part

Description	EU Marking
CE conformity marking	CE
Explosion protection marking	
Equipment group	II
Equipment category	2G / 2D

3. EU marking (per EN ISO 80078-36.2016 Standard part)

Description	EU marking
Protection principle	h
Explosion protection marking	Ex

Description		EU marking
Equipment group		II / III
Equipment protection level (EPL)		Gb / Db
T-class	Gas	T5...T4
	Dust	T70°C...T155°C

**Table 1: EPL/Equipment category**

Definition	Level of protection	Typical zone of application	EN ISO		EU	
			EPL	Group	Category	Group
Gas atmosphere	Very high	0	Ga	II	1G	II
	High	1	Gb		2G	
	Enhanced	2	Gc		3G	
Dust atmosphere	Very high	20	Da	III	1D	II
	High	21	Db		2D	
	Enhanced	22	Dc		3D	

4. See item 3
5. Min and max ambient temperature (see *T codes and maximum surface temperature for OMR motors* on page 12)
6. Manufacturer
7. Motor type and displacement
8. Code number
9. Production number, date, and series number

Item 9 example: **W94921234**

<b>W</b>	Manufacturing location (W = Wroclaw)
<b>9</b>	Year 2019
<b>49</b>	Week 49
<b>2</b>	Tuesday (1 = Monday)
<b>1234</b>	Consecutive number



---

# Chapter

# 2

---

## T codes / Maximum surface temperature

---

### Topics:

- *T codes and maximum surface temperature for OMR motors*

## T codes and maximum surface temperature for OMR motors

### T codes for OMR motors – Gaseous environment (Group II)

**Table 2: OMR motors - fluid and ambient temperature**

Maximum oil temperature	Maximum ambient temperature		
	≤ 20 °C [64 °F]	≤ 40 °C [104 °F]	≤ 60 °C [140 °F]
≤ 20 °C [68 °F]	T5	T5	T5
≤ 40 °C [104 °F]	T5	T5	T4
≤ 60 °C [140 °F]	T5	T4	T4
≤ 80 °C [176 °F]	T4	T4	T4

**Table 3: Classification of maximum surface temperatures for Group II equipment:**

Temperature class	Maximum surface temperature	
	°C	[°F]
T4	135	[275]
T5	100	[212]

**Note:**

For Group II with T4 classification it is acceptable that small surface areas (total areas  $\geq 20 \text{ mm}^2$  and  $\leq 1000 \text{ mm}^2$ ) can have surface temperature up to 200 °C.

For T5 classification it is acceptable that small surface areas (total areas  $\leq 1000 \text{ mm}^2$ ) can have surface temperature up to 150 °C.

### Maximum surface temperature – Dusty environment (Group III)

**Table 4: OMR motors - Maximum surface temperature**

Maximum oil temperature	Maximum ambient temperature		
	≤ 20 °C [68 °F]	≤ 40 °C [104 °F]	≤ 60 °C [140 °F]
≤ 20 °C [68 °F]	70	90	110
≤ 40 °C [104 °F]	85	105	125
≤ 60 °C [140 °F]	100	120	140
≤ 80 °C [176 °F]	115	135	155

**Note:** Above maximum surface temperature is without any deposited dust on the motors. The possible insulation effect of a dust layer on the surface temperature has to be taken into account by the safety margin to the minimum ignition temperature of the dust concerned. Up to 5 mm [1.97 in] layer thickness the safety margin is 75 °C [167 °F]. For further information please see IEC 60079-14.



**Warning:** The above operating temperatures (ambient and oil) of the motor must be guaranteed by the end user.



**Warning:** It is compulsory to use oils whose inflammable degree is at least 50K above the maximum surface temperature of the motor. See also *Oil types / Operating fluids* on page 16.

---

# Chapter

# 3

---

## Versions and code numbers

---

### Topics:

- *OMR motors*
-

# OMR motors

## OMR standard motor

**Table 5: Mounting flange: 2 hole flange (A2)**

Spigot diameter		Ø82.5 mm [3.25 in]					
Bolt circle diameter		Ø106.4 mm [4.20 in]					
Shaft	Main port size	Drain port size	Check valve	Standard shaft seal	High pressure shaft seal	Main type designation	Conf. code
Cyl. Ø25 mm	G 1/2	G 1/4	Yes	-	Yes	OMR	<i>A1</i>
Splined 1in (SAE 6B)	G 1/2	G 1/4	Yes	-	Yes	OMR	<i>A2</i>
Cyl. Ø32 mm	G 1/2	G 1/4	Yes	Yes	-	OMR	<i>A3</i>

**Table 6: Code numbers**

Conf. code	Displacement								
	50	80	100	125	160	200	250	315	375
<i>A1</i>	11159797	11159798	11159799	11159801	11159802	11159803	11159804	11159805	11159806
<i>A2</i>	11159809	11159810	11159812	11159813	11159814	11159815	11159816	11159817	11159818
<i>A3</i>	11181934	11181935	11181936	11181937	11181938	11181939	11181940	11181941	11181942

---

# Chapter

# 4

---

## Technical specification - ATEX OMR motors

---

### Topics:

- *Ambient temperature*
- *Oil types / Operating fluids*

All necessary design information for instance maximum pressure rating, maximum flow, maximum radial load etc. are provided in the relevant Technical Information documents.

For easy collection of the technical specifications see *Cross list* on page 19 which shows a cross list between the code number for the standard motor and the equivalent ATEX certified motor.

The rated data published in the Technical Information are based on the use of premium mineral based hydraulic oil with a viscosity of 35 mm<sup>2</sup>/s.

## Ambient temperature

Maximum ambient temperature depends on the requested ATEX class needed – please see [T codes / Maximum surface temperature](#) on page 11.

In general the ambient temperature should lie between -30 °C [-22 °F] and +60 °C [+140 °F].

## Oil types / Operating fluids

In a hydraulic system the most important task of the oil is to transfer energy. At the same time the oil must lubricate moving parts in hydraulic components, protect them from corrosion, and transport dirt particles and heat out of the system. To ensure that hydraulic components operate without problems and have long operating life it is therefore vital to select the correct oil type with the necessary additives.

Ratings and performance data are based on operating with hydraulic fluids containing oxidation, rust and foam inhibitors. These fluids must possess good thermal and hydrolytic stability to prevent wear, erosion and corrosion of components.

### Mineral oils

For systems containing hydraulic motors, mineral hydraulic oil with anti-wear additives type HLP [DIN 51524] or HM (ISO 11158) **must be used**. Mineral oils without anti-wear additives or engine oils can also be used, provided operating conditions are suitable.



**Warning:** It is compulsory to use oils whose inflammable degree is at least 50K above the maximum surface temperature of the motor. Maximum surface temperature for Group II and III can be found under: [T codes / Maximum surface temperature](#) on page 11.

### Oil temperature

Maximum oil temperature depends on the requested ATEX class needed. See .

Under normal operating conditions it is recommended to keep the temperature in the range of 30 °C [86 °F] to 60 °C [140 °F].

Fluid temperature affects the viscosity of the fluid and resulting lubricity and film thickness. High temperatures can also limit seal life, at most nonmetallic materials are adversely affected by use at elevated temperatures.

Fluids may break down or oxidize at high temperature, reducing their lubricity and resulting in reduced life of the unit. Oil life is greatly reduced if its temperature exceeds +60 °C [+140 °F]. As a general rule, oil life is halved for each 8 °C [46 °F] its temperature exceeds +60 °C [+140 °F].

### Viscosity

Maintain fluid viscosity within the recommended range for maximum efficiency and bearing life. Minimum viscosity should only occur during brief occasions of maximum ambient temperature and severe duty cycle operation. Maximum viscosity should only occur at cold start. Limit speeds until the system warms up.

**Table 7: Fluid viscosity limits**

Conditions	mm <sup>2</sup> /s (cSt)	SUS
Minimum	12	66
Continuous	20 - 80	98 - 370
Maximum	1500	6950

We recommend the use of an oil type having a viscosity of 35 mm<sup>2</sup>/s at the actual operating temperature.

## Filtering

It is necessary to keep the level of oil contamination at an acceptable level to ensure problem-free operation. The recommended maximum level of contamination in systems with hydraulic orbital motors is 22/20/16 ( ISO 4406-1999).



---

# Chapter

# 5

---

## Cross list

---

### Topics:

- [OMR motor cross list](#)

For easy collection of the technical specifications are the following lists shown a cross list between the code number for the standard motor and the equivalent ATEX certified motor.

## OMR motor cross list

**Table 8: Mounting flange: A2 flange**

Shaft type	Cylindrical 25 mm (Conf. Code A1)		Splined 1" (SAE 6B) (Conf. Code A2)	
	Standard motor	ATEX certified	Standard motor	ATEX certified
Code number	151-0710	11159797	151-0720	11159809
	151-0711	11159798	151-0721	11159810
	151-0712	11159799	151-0722	11159812
	151-0713	11159801	151-0723	11159813
	151-0714	11159802	151-0724	11159814
	151-0715	11159803	151-0725	11159815
	151-0716	11159804	151-0726	11159816
	151-0717	11159805	151-0727	11159817
	151-0718	11159806	151-0728	11159818

**Table 9: Mounting flange: A2 flange**

Shaft type	Cylindrical 32 mm (Conf. Code A3)	
	Standard motor	ATEX certified
Code number	151-0248	11181934
	151-0242	11181935
	151-0243	11181936
	151-0208	11181937
	151-0244	11181938
	151-0245	11181939
	151-0247	11181940
	151-0246	11181941
	151-6294	11181942

---

# Chapter

# 6

---

## Declaration

---

| EU Declaration of Conformity to be added by White.



---

# Notice

---

## Back Cover

---

**Topics:**

- [Products we offer](#)
- [About Danfoss Power Solutions](#)

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed.

All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.

## Products we offer

---

### Products we offer:

- Cartridge valves
- DCV directional control valves
- Electric converters
- Electric machines
- Electric motors
- Gear motors
- Gear pumps
- Hydraulic integrated circuits (HICs)
- Hydrostatic motors
- Hydrostatic pumps
- Orbital motors
- PLUS+1<sup>®</sup> controllers
- PLUS+1<sup>®</sup> displays
- PLUS+1<sup>®</sup> joysticks and pedals
- PLUS+1<sup>®</sup> operator interfaces
- PLUS+1<sup>®</sup> sensors
- PLUS+1<sup>®</sup> software
- PLUS+1<sup>®</sup> software services, support and training
- Position controls and sensors
- PVG proportional valves
- Steering components and systems
- Telematics

## About Danfoss Power Solutions

---

**Danfoss Power Solutions** is a global manufacturer and supplier of high-quality hydraulic and electric components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market as well as the marine sector. Building on our extensive applications expertise, we work closely with you to ensure exceptional performance for a broad range of applications. We help you and other customers around the world speed up system development, reduce costs and bring vehicles and vessels to market faster.

Danfoss Power Solutions – your strongest partner in mobile hydraulics and mobile electrification.

**Go to [www.danfoss.com](http://www.danfoss.com) for further product information.**

We offer you expert worldwide support for ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide you with comprehensive global service for all of our components.