

Welcome To **BUCHER**
hydraulics

POWER UNITS

Our quality: We always adhere to the implementation of ISO9001 quality management system and continuously strengthen and improve internal management, as well as providing our customers with best quality products. Quality and service is our sincere commitment.



Search:

Position: Index >> Products

Gear Pumps and Gear Motors **Power Units** **Hydraulic Valves** **Accessories**

Lift Table Power Units 3


Lift Table Power Units 3

General Description



Consisting of high pressure gear pump, DC motor, multi-functional manifold, valves and tank, this power unit has been widely used in the industry of logistic devices such as fork lift, mini lift table and scissors lift. The lowering movement is controlled by the solenoid valve with the lower speed controlled by adjustable throttle valve. The needle release valve is used for lowering movement in case of power failure.

Outline Dimension

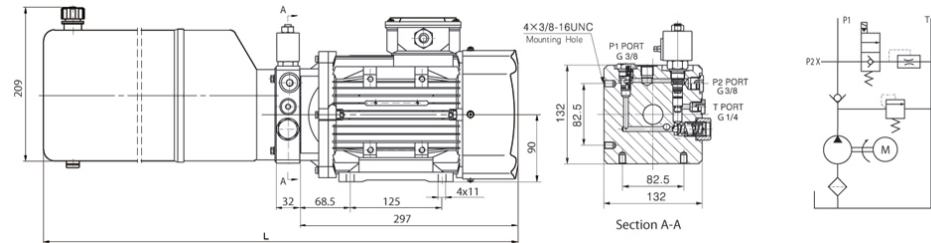

Model Specifications

Model	Motor Volt	Motor power	Rated Speed	Displacement	System pressure	Tank Capacity	L(mm)
YBZ-F1.6B3G2/LCABD1	220VAC	1.5KW	2800 RPM	1.6mL/r	20MPa	6L	629
YBZ-E2.1B3G2/LCAED1				2.1mL/r	16MPa	6L	629
YBZ-D2.5C3G2/LCAED1				2.5mL/r	12MPa	8L	699
YBZ-F2.1C4H2/LCAED1	380VAC	2.2KW		2.1mL/r	20MPa	8L	699
YBZ-E2.5D4H2/LCABD1				2.5mL/r	16MPa	10L	769
YBZ-E2.7E4H2/LCAED1				2.7mL/r	15MPa	12L	869

Remark: 1. Please go to page 38 or consult our sales engineer for the different pump displacement, motor power or tank capacity.

- Clean all the hydraulic parts concerned before mounting the power unit.
- 60HZ motors with CSA or UL certification are available upon request.

Special notes

- The duty of this power unit is S3, i.e., 30 seconds on and 270 seconds off.
- Clean all the hydraulic parts concerned before mounting the power unit.
- Viscosity of the hydraulic oil should be 15-68 cst, which should also be clean and free of impurities. N46 hydraulic oil is recommended.
- Oil changing is required after the initial 100 operation hours, afterwards once every 3000 hours.
- The power unit should be mounted horizontally.

Copyright: Bucher Hydraulics (Wuxi)Co.,Ltd. 编号: 苏ICP备18069474号-1