

Hydraulics Network



SECTIONAL VALVES

2023



OIL SOLUTIONS

PO Box 38

Strathfieldsaye, VIC, 3551

1800 OIL SOL

1800 645 765

sales@oilsolutions.com.au

www.oilsolutions.com.au

"For All Your Hydraulic Needs"

SECTIONAL VALVES

SN3 (50 LPM)

SN3 Sectional Valve

Part #	List Price \$	Qty	Spool	Max Flow (lpm)	Max Pressure (bar)		Ports (BSPP)		Dimension (mm)	
					P	T	T-C	P-A-B	X	Y
SN3/1S3/18L/P3T/G3-4-M3		1	Cylinder	50	315	25	1/2"	3/8"	118.5	58
SN3/2S3/18L/P3T/G3-4-M3		2	Cylinder	50	315	25	1/2"	3/8"	156.5	96
SN3/3S3/18L/P3T/G3-4-M3		3	Cylinder	50	315	25	1/2"	3/8"	194.5	134
SN3/4S3/18L/P3T/G3-4-M3		4	Cylinder	50	315	25	1/2"	3/8"	232.5	172
SN3/5S3/18L/P3T/G3-4-M3		5	Cylinder	50	315	25	1/2"	3/8"	270.5	210
SN3/6S3/18L/P3T/G3-4-M3		6	Cylinder	50	315	25	1/2"	3/8"	308.5	248
SN3/7S3/18L/P3T/G3-4-M3		7	Cylinder	50	315	25	1/2"	3/8"	346.5	286
SN3/8S3/18L/P3T/G3-4-M3		8	Cylinder	50	315	25	1/2"	3/8"	384.5	324
SN3/9S3/18L/P3T/G3-4-M3		9	Cylinder	50	315	25	1/2"	3/8"	422.5	362
SN3/10S3/18L/P3T/G3-4-M3		10	Cylinder	50	315	25	1/2"	3/8"	460.5	400
SN3/11S3/18L/P3T/G3-4-M3		11	Cylinder	50	315	25	1/2"	3/8"	498.5	438
SN3/12S3/18L/P3T/G3-4-M3		12	Cylinder	50	315	25	1/2"	3/8"	536.5	476

SN3 Seal Kits & Replacement Handles





Part #	List Price \$	Description
FPSN-3-SK		Inlet relief seal
EWSN-3-SK		Working section seal kit
FTSN-3-SK		Outlet section seal kit
YLWSN33080-SK		SN3 pneumatic actuator seal kit
YLWSN08160		SN3 handle

Relief valve standard
range 63-200 bar

Relief valve standard
setting 120 bar

Port cavities in all
sections

Series sections available
Max 210 bar

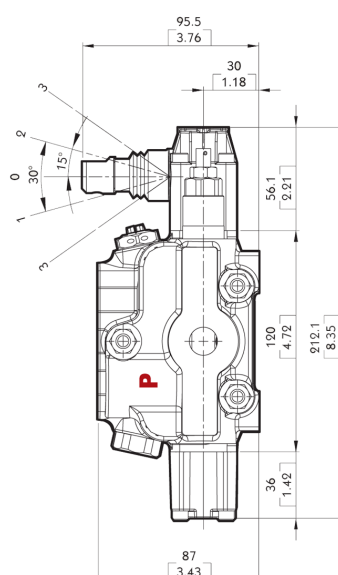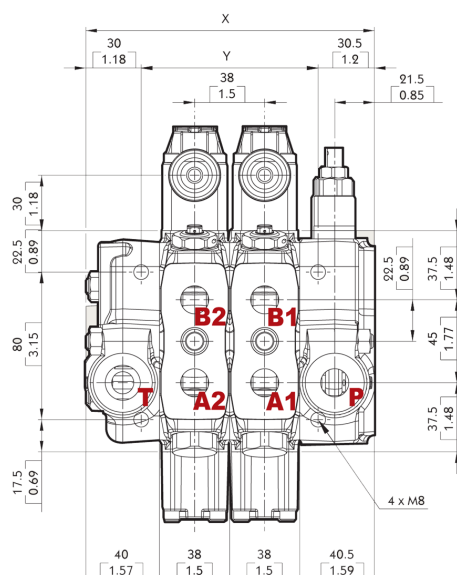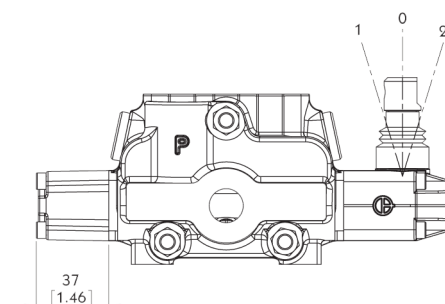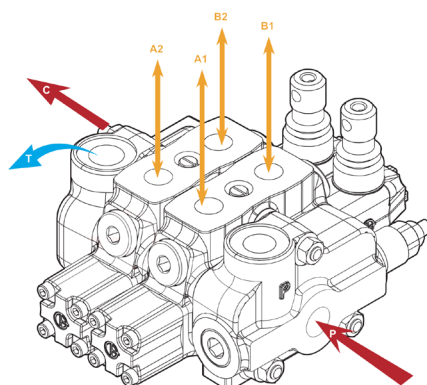


SN-3 / 2S - 3 / 18LPG2 / 26-1L / G-3-4 - M3

NOMENCLATURE GUIDE

2S	No. of working sections	8	B-side spool positioner	G-3	3/8" BSP ports
3	Inlet pressure relief valve	L	A-side option	G-4	1/2" BSP ports
1	Spool option	PG2	Port relief (optional)	M3	Outlet cover

* Spool sequence starts from the spool closest to the relief valve.

* Spool option B-side and A-side must be repeated for each spool section unless the configuration is common throughout the valve.

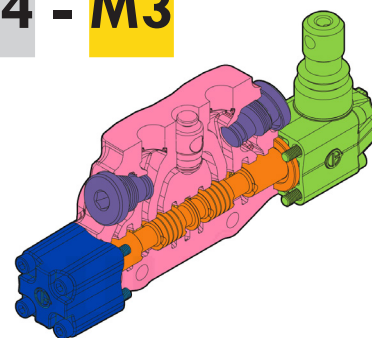

BODY KITS	Code	Description	List Price	Code	Description	List Price
	1S	1 section		1S	7 sections	
	2S	2 sections		2S	8 sections	
	3S	3 sections		3S	9 sections	
	4S	4 sections		4S	10 sections	
	5S	5 sections		5S	11 sections	
	6S	6 sections		6S	12 sections	

INLET PRESSURE RELIEF VALVE	Code	Part #	Description	List Price
	3	YLPSN33003	Range 63 to 200 bar STANDARD	
	4	YLPSN33004	Range 160 to 315 bar	
	5V	YLPSN34000	Relief valve blanking plug	
	XYG	YLPSN33000	Pilot operated pressure relief valve, range 25 to 315 bar	

SPOOL OPTIONS	Code	Part #	Description	List Price
	1	YLWSN32001	Double acting, 3 positions, A+B closed in neutral position STANDARD	
	1S	-	Double acting, 3 positions, A+B closed in neutral position, for series circuit	-
	2S	-	Double acting, 3 positions, A+B open to tank in neutral position, for series circuit	-
	2	YLWSN32002	Double acting, 3 positions, A+B open to tank in neutral position STANDARD	
	3	YLWSN32003	Single acting on A closed in neutral position, 3 positions, B plugged	
	4	YLWSN32004	Single acting on B closed in neutral position, 3 positions, A plugged	

B-SIDE SPOOL POSITIONER	Code	Part #	Description	List Price
	6-1	YLWSN33061	Detent in position 1-0-2, without spring centered	
	6-2	YLWSN33062	2 positions, detent in position 0-2, without spring centered	
	8	YLWSN33008	Spring return to neutral position STANDARD	
	9-1	YLWSN33091	Detent in position 1, 2 with spring centered	
	9-2	YLWSN33092	Detent in position 2 with spring centered	
	9-3	YLWSN33093	Detent in position 1 with spring centered	
	8EP3A	YLWSN34300-12V	ON/OFF electro-pneumatic actuator 12v DC	
	8EP3B	YLWSN34300-24V	ON/OFF electro-pneumatic actuator 24v DC	
	8P	YLWSN33080	ON/OFF pneumatic actuator	
	8MG3	YLWSN34803	Microswitch kit operated in position 1 & 2 (normally open)	
	8IM	YLWSN330810	Hydraulic pilot kit - SN3 - pilot pressure max 50 bar	

PORT RELIEF (optional)	Code	Part #	Description	List Price
	PG2	YLWSN35002	Anti-shock valve, range 63 to 125 bar	
	PG3	YLWSN35003	Anti-shock valve, range 100 to 250 bar	
	PG4	YLWSN35004	Anti-shock valve, range 200 to 315 bar	
	UG2	YLWSN35012	Anti-shock valve and anti-cavitation valve, range 63 to 125 bar	
	UG3	YLWSN35013	Anti-shock valve and anti-cavitation valve, range 100 to 250 bar	
	UG4	YLWSN35014	Anti-shock valve and anti-cavitation valve, range 200 to 315 bar	

A-SIDE OPTION	Code	Part #	Description	List Price
	L	YLWSN34000	Standard lever STANDARD	
	LCB	YLWSN34002	Joystick lever for 2 section operation	

OUTLET COVER	Code	Part #	Description	List Price
	M3	-	Open centre STANDARD	-
	M8	-	Closed centre (power beyond conversion plug)	-

SECTIONAL VALVES

SN4 (80 LPM)

SN4 Sectional Valve





Part #	List Price \$	Qty	Spool	Max Flow (lpm)	Max Pressure (bar)		Ports (BSPP)		Dimension (mm)	
					P	T	T-C	P-A-B	X	Y
SN4/1S3/18L/P3T/G4-6-M3		1	Cylinder	80	315	25	3/4"	1/2"	128	82
SN4/2S3/18L/P3T/G4-6-M3		2	Cylinder	80	315	25	3/4"	1/2"	169	123
SN4/3S3/18L/P3T/G4-6-M3		3	Cylinder	80	315	25	3/4"	1/2"	210	164
SN4/4S3/18L/P3T/G4-6-M3		4	Cylinder	80	315	25	3/4"	1/2"	251	205
SN4/5S3/18L/P3T/G4-6-M3		5	Cylinder	80	315	25	3/4"	1/2"	292	246
SN4/6S3/18L/P3T/G4-6-M3		6	Cylinder	80	315	25	3/4"	1/2"	333	267
SN4/7S3/18L/P3T/G4-6-M3		7	Cylinder	80	315	25	3/4"	1/2"	374	328
SN4/8S3/18L/P3T/G4-6-M3		8	Cylinder	80	315	25	3/4"	1/2"	415	369
SN4/9S3/18L/P3T/G4-6-M3		9	Cylinder	80	315	25	3/4"	1/2"	456	410
SN4/10S3/18L/P3T/G4-6-M3		10	Cylinder	80	315	25	3/4"	1/2"	497	451
SN4/11S3/18L/P3T/G4-6-M3		11	Cylinder	80	315	25	3/4"	1/2"	538	492
SN4/12S3/18L/P3T/G4-6-M3		12	Cylinder	80	315	25	3/4"	1/2"	579	533

SN4 Seal Kits & Replacement Handles

Part #	List Price \$	Description
FPSN-4-SK		Inlet relief seal
EWSN-4-SK		Working section seal kit
FTSN-4-SK		Outlet section seal kit
YLWSN43080-SK		SN4 pneumatic actuator seal kit
YLWSN10200		SN4 handle

Relief valve standard
range 125-250 bar

Relief valve standard
setting 120 bar

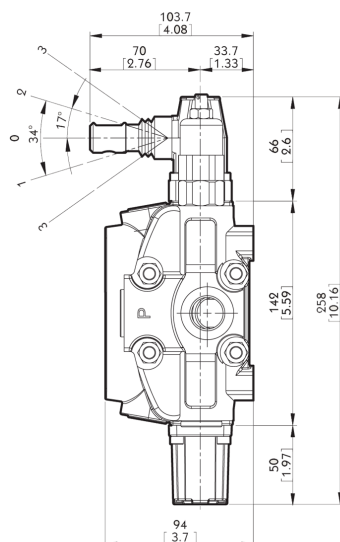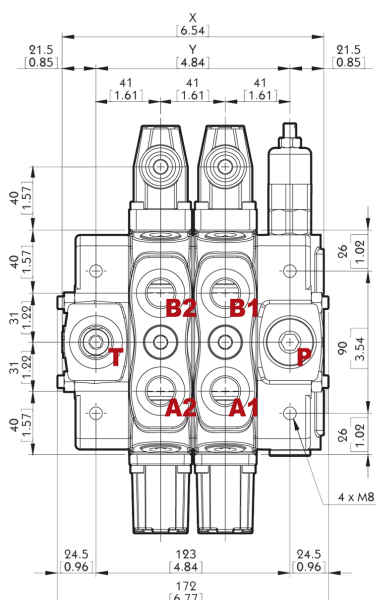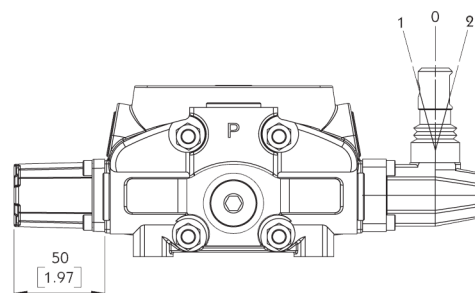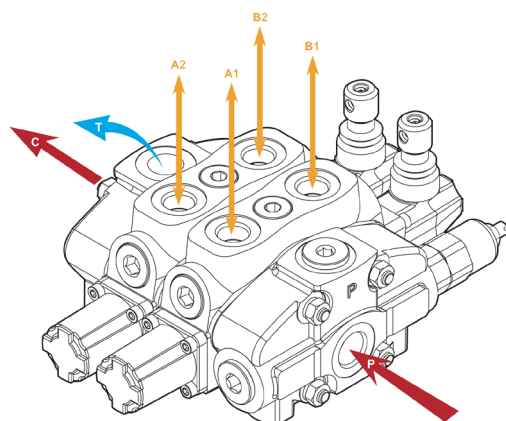


SN-4 / 2S - 3 / 18LPG2 / 26-1L / G-4-6 - M3

NOMENCLATURE GUIDE

2S	No. of working sections	8	B-side spool positioner	G-4	1/2" BSP ports
3	Inlet pressure relief valve	L	A-side option	G-6	3/4" BSP ports
1	Spool option	PG2	Port relief (optional)	M3	Outlet cover

* Spool sequence starts from the spool closest to the relief valve.

* Spool option B-side and A-side must be repeated for each spool section unless the configuration is common throughout the valve.

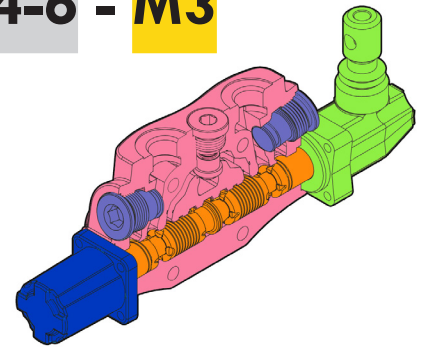

BODY KITS	Code	Description	List Price	Code	Description	List Price
	1S	1 section		1S	7 sections	
	2S	2 sections		2S	8 sections	
	3S	3 sections		3S	9 sections	
	4S	4 sections		4S	10 sections	
	5S	5 sections		5S	11 sections	
	6S	6 sections		6S	12 sections	

INLET PRESSURE RELIEF VALVE	Code	Part #	Description	List Price
	3	YLPSN43003	Range 125 to 250 bar STANDARD	
	4	YLPSN43004	Range 200 to 315 bar	
	SV	YLPSN44000	Relief valve blanking plug	
	XSG	YLX21000	Pilot operated pressure relief valve, range 25 to 315 bar	

SPOOL OPTIONS	Code	Part #	Description	List Price
	1	YLWSN42001	Double acting, 3 positions, A+B closed in neutral position STANDARD	
	2	YLWSN42002	Double acting, 3 positions, A+B open to tank in neutral position STANDARD	
	3	YLWSN42003	Single acting on A closed in neutral position, 3 positions, B plugged	
	1KOL	EWSN-4/1KOL/G-4	SN4 pressure kickout working section	

B-SIDE SPOOL POSITIONER	Code	Part #	Description	List Price
	6-1	YLWSN43061	Detent in position 1-0-2, without spring centered	
	8	YLWSN43008	Spring return to neutral position STANDARD	
	9-1	YLWSN43091	Detent in position 1, 2 with spring centered	
	9-2	YLWSN43092	Detent in position 2 with spring centered	
	9-3	YLWSN43093	Detent in position 1 with spring centered	
	8EP3A	YLWSN44300-12V	ON/OFF electro-pneumatic actuator 12v DC	
	8EP3B	YLWSN44300-24V	ON/OFF electro-pneumatic actuator 24v DC	
	8P	YLWSN43080	ON/OFF pneumatic actuator	
	8MG3	YLWSN43803	Microswitch kit operated in position 1 & 2 (normally open)	
	8IM	YLWSN430810	Hydraulic pilot with single spring, exclusive for standard spool (type 1+2)	
	8D2	YLWSN43082	Spring return to neutral position, pin with M8 thread for dual control	

PORT RELIEF (optional)	Code	Part #	Description	List Price
	PG2	YLWSN45002	Anti-shock valve, range 63 to 125 bar	
	PG3	YLWSN45003	Anti-shock valve, range 100 to 250 bar	
	PG4	YLWSN45004	Anti-shock valve, range 200 to 315 bar	
	UG2	YLWSN45012	Anti-shock valve and anti-cavitation valve, range 63 to 125 bar	
	UG3	YLWSN45013	Anti-shock valve and anti-cavitation valve, range 100 to 250 bar	
	UG4	YLWSN45014	Anti-shock valve and anti-cavitation valve, range 200 to 315 bar	
	C	YLWSN45100	Anti-cavitation valve	

A-SIDE OPTION	Code	Part #	Description	List Price
	L	YLWSN44000	Standard lever STANDARD	
	LCB	YLWSN44002	Joystick lever for 2 section operation	

OUTLET COVER	Code	Part #	Description	List Price
	M3	-	Open centre STANDARD	-
	M8	-	Closed centre (power beyond conversion plug)	-

SECTIONAL VALVES

SN6 (140 LPM)

SN6 Sectional Valve

Part #	List Price \$	Qty	Spool	Max Flow (lpm)	Max Pressure (bar)		Ports (BSPP)		Dimension (mm)	
							T	P-A-B-C	X	Y
SN6/1S3/18L/P3T/G6-1-M3		1	Cylinder	140	315	25	1"	3/4"	176	124
SN6/2S3/18L/P3T/G6-1-M3		2	Cylinder	140	315	25	1"	3/4"	224	172
SN6/3S3/18L/P3T/G6-1-M3		3	Cylinder	140	315	25	1"	3/4"	272	220
SN6/4S3/18L/P3T/G6-1-M3		4	Cylinder	140	315	25	1"	3/4"	320	268
SN6/5S3/18L/P3T/G6-1-M3		5	Cylinder	140	315	25	1"	3/4"	368	316
SN6/6S3/18L/P3T/G6-1-M3		6	Cylinder	140	315	25	1"	3/4"	416	364
SN6/7S3/18L/P3T/G6-1-M3		7	Cylinder	140	315	25	1"	3/4"	464	412
SN6/8S3/18L/P3T/G6-1-M3		8	Cylinder	140	315	25	1"	3/4"	512	460
SN6/9S3/18L/P3T/G6-1-M3		9	Cylinder	140	315	25	1"	3/4"	560	508
SN6/10S3/18L/P3T/G6-1-M3		10	Cylinder	140	315	25	1"	3/4"	608	556
SN6/11S3/18L/P3T/G6-1-M3		11	Cylinder	140	315	25	1"	3/4"	656	604
SN6/12S3/18L/P3T/G6-1-M3		12	Cylinder	140	315	25	1"	3/4"	704	652





SN6 Seal Kits & Replacement Handles

Part #	List Price \$	Description
FPSN-6-SK		Inlet relief seal
EWSN-6-SK		Working section seal kit
FTSN-6-SK		Outlet section seal kit
YLWSN63080-SK		SN6 pneumatic actuator kit
YLWSN10200		SN6 handle

Relief valve standard
range 25-215 bar

Relief valve standard
setting 125 bar

Port cavities in all
sections

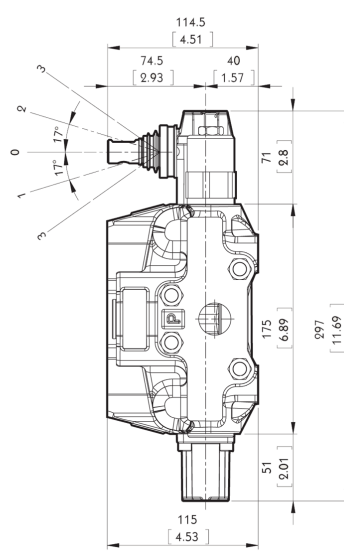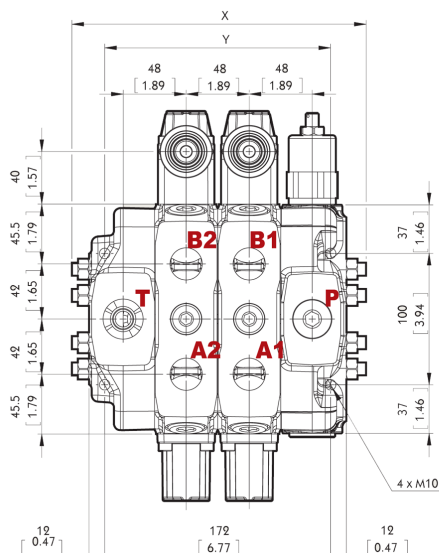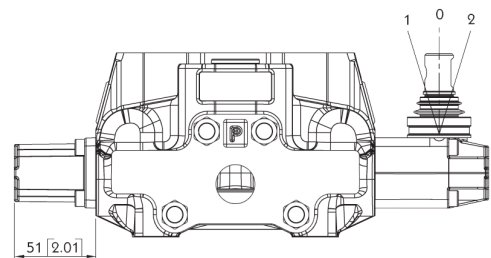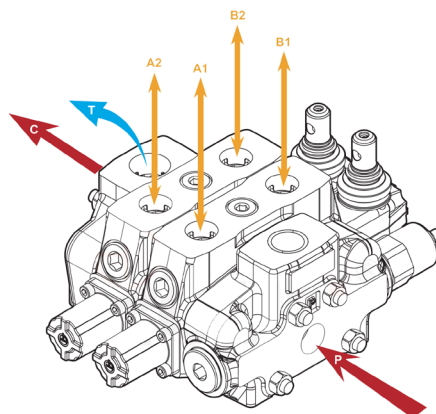

1800-OILSOL
1800-645765

<https://oilsolutions.com.au/>

sales@oilsolutions.com.au


SN-6 / 2S - 3 / 18LPG2 / 26-1L / G-6-1 - M3

NOMENCLATURE GUIDE

2S	No. of working sections	8	B-side spool positioner	G-6	3/4" BSP ports
3	Inlet pressure relief valve	L	A-side option	G-1	1" BSP ports
1	Spool option	PG2	Port relief (optional)	M3	Outlet cover

* Spool sequence starts from the spool closest to the relief valve.

* Spool option B-side and A-side must be repeated for each spool section unless the configuration is common throughout the valve.

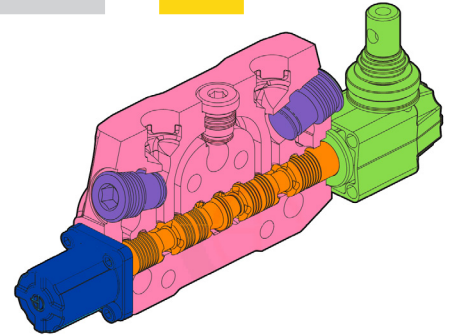

BODY KITS	Code	Description	List Price	Code	Description	List Price
	1S	1 section		1S	7 sections	
	2S	2 sections		2S	8 sections	
	3S	3 sections		3S	9 sections	
	4S	4 sections		4S	10 sections	
	5S	5 sections		5S	11 sections	
	6S	6 sections		6S	12 sections	

INLET PRESSURE RELIEF VALVE	Code	Part #	Description	List Price
	3	YLPSN63003	Range 125 to 250 bar STANDARD	
	SV	YLPSN64000	Relief valve blanking plug	
	XFG	YLPSN63000	Pilot operated pressure relief valve, range 25 to 315 bar	

SPOOL OPTIONS	Code	Part #	Description	List Price
	1	YLWSN62001	Double acting, 3 positions, A+B closed in neutral position STANDARD	
	2	YLWSN62002	Double acting, 3 positions, A+B open to tank in neutral position STANDARD	
	3	YLWSN62003	Single acting on A closed in neutral position, 3 positions, B plugged	

B-SIDE SPOOL POSITIONER	Code	Part #	Description	List Price
	6-1	YLWSN63061	Detent in position 1-0-2, without spring centered	
	8	YLWSN63008	Spring return to neutral position STANDARD	
	9-1	YLWSN63091	Detent in position 1, 2 with spring centered	
	9-2	YLWSN63092	Detent in position 2 with spring centered	
	9-3	YLWSN63093	Detent in position 1 with spring centered	
	8EP3A	YLWSN64300-12V	ON/OFF electro-pneumatic actuator 12v DC	
	8EP3B	YLWSN64300-24V	ON/OFF electro-pneumatic actuator 24v DC	
	8P	YLWSN63080	ON/OFF pneumatic actuator	
	8MG3	YLWSN63803	Microswitch kit operated in position 1 & 2 (normally open)	
	8IM	YLWSN630810	Hydraulic pilot kit, pilot pressure maximum 50 bar	

PORT RELIEF (optional)	Code	Part #	Description	List Price
	PG2	YLWSN65002	Anti-shock valve, range 63 to 125 bar	
	PG3	YLWSN65003	Anti-shock valve, range 100 to 250 bar	
	PG4	YLWSN65004	Anti-shock valve, range 200 to 315 bar	
	UG2	YLWSN65012	Anti-shock valve and anti-cavitation valve, range 63 to 125 bar	
	UG3	YLWSN65013	Anti-shock valve and anti-cavitation valve, range 100 to 250 bar	
	UG4	YLWSN65014	Anti-shock valve and anti-cavitation valve, range 200 to 315 bar	
	C	YLWSN65100	Anti-cavitation valve	

A-SIDE OPTION	Code	Part #	Description	List Price
	L	YLWSN64000	Standard lever STANDARD	
	LCB	YLWSN64002	Joystick lever for 2 section operation	

OUTLET COVER	Code	Part #	Description	List Price
	M3	-	Open centre STANDARD	-
	M8	-	Closed centre (power beyond conversion plug)	-



1800-OILSOL
1800-645765

<https://oilsolutions.com.au/>

sales@oilsolutions.com.au

SECTIONAL VALVES

SN8 (220 LPM)

SN8 Sectional Valve

Part #	List Price \$	Qty	Spool	Max Flow (lpm)	Max Pressure (bar)		Ports (BSPP)		Dimension (mm)	
					P	T	T	P-A-B-C	X	Y
SN8/1S3/18L/P3T/G8-8-10-M3		1	Cylinder	220	315	25	1.1/4"	1"	235	162
SN8/2S3/18L/P3T/G8-8-10-M3		2	Cylinder	220	315	25	1.1/4"	1"	297	224
SN8/3S3/18L/P3T/G8-8-10-M3		3	Cylinder	220	315	25	1.1/4"	1"	359	286
SN8/4S3/18L/P3T/G8-8-10-M3		4	Cylinder	220	315	25	1.1/4"	1"	421	348
SN8/5S3/18L/P3T/G8-8-10-M3		5	Cylinder	220	315	25	1.1/4"	1"	483	410
SN8/6S3/18L/P3T/G8-8-10-M3		6	Cylinder	220	315	25	1.1/4"	1"	545	472
SN8/7S3/18L/P3T/G8-8-10-M3		7	Cylinder	220	315	25	1.1/4"	1"	607	534
SN8/8S3/18L/P3T/G8-8-10-M3		8	Cylinder	220	315	25	1.1/4"	1"	669	596
SN8/9S3/18L/P3T/G8-8-10-M3		9	Cylinder	220	315	25	1.1/4"	1"	731	658
SN8/10S3/18L/P3T/G8-8-10-M3		10	Cylinder	220	315	25	1.1/4"	1"	793	720
SN8/11S3/18L/P3T/G8-8-10-M3		11	Cylinder	220	315	25	1.1/4"	1"	855	782
SN8/12S3/18L/P3T/G8-8-10-M3		12	Cylinder	220	315	25	1.1/4"	1"	917	844





SN8 Seal Kits & Replacement Handles

Part #	List Price \$	Description
FPSN-8-SK		Inlet relief seal
EWSN-8-SK		Working section seal kit
FTSN-8-SK		Outlet section seal kit
YLWSN83080-SK		SN8 pneumatic actuator seal kit
YLWSN12200		SN8 handle

Relief valve standard
range 25-215 bar

Relief valve standard
setting 125 bar

Port cavities in all
sections

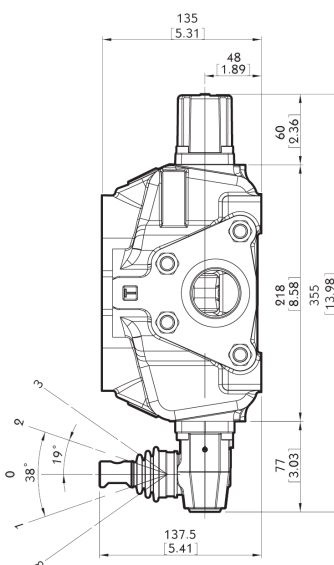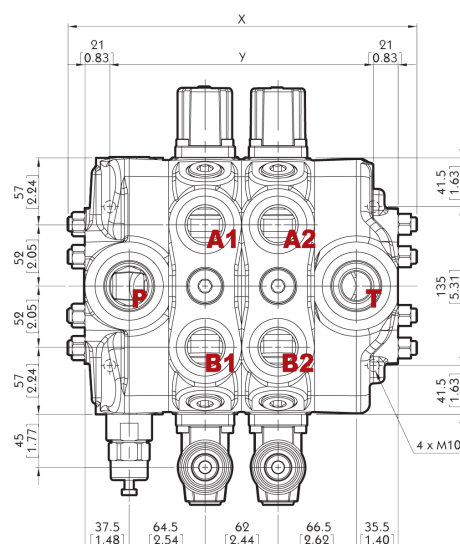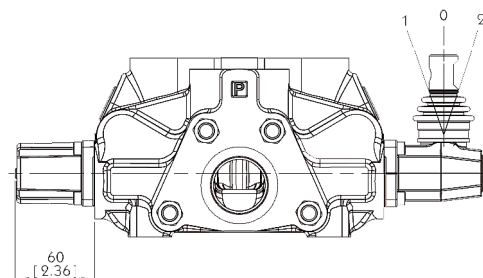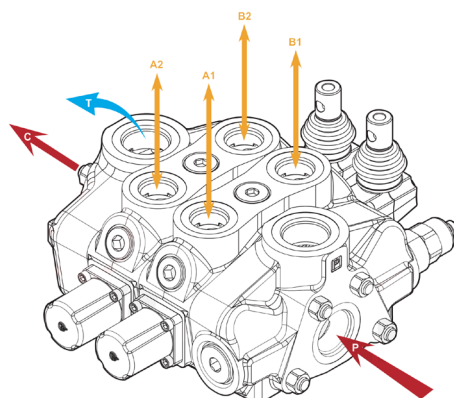


SN-8 / 2S - 3 / 18LPG2 / 26-1L / G-8-8-10 - M3

NOMENCLATURE GUIDE

2S	No. of working sections	8	B-side spool positioner	G-8	1" BSP ports
3	Inlet pressure relief valve	L	A-side option	G-10	1.1/4" BSP ports
1	Spool option	PG2	Port relief (optional)	M3	Outlet cover

* Spool sequence starts from the spool closest to the relief valve.

* Spool option B-side and A-side must be repeated for each spool section unless the configuration is common throughout the valve.

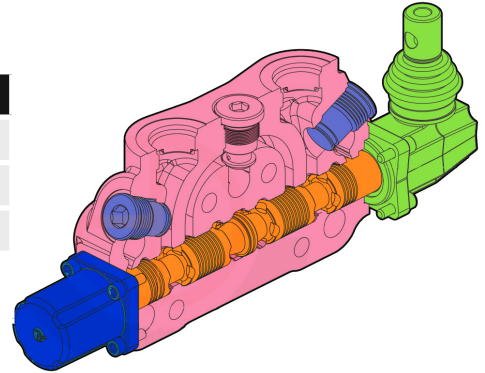

BODY KITS	Code	Description	List Price	Code	Description	List Price
	1S	1 section		1S	7 sections	
	2S	2 sections		2S	8 sections	
	3S	3 sections		3S	9 sections	
	4S	4 sections		4S	10 sections	
	5S	5 sections		5S	11 sections	
	6S	6 sections		6S	12 sections	

INLET PRESSURE RELIEF VALVE	Code	Part #	Description	List Price
	XHG	YLPSN83000	Pilot operated pressure relief valve, range 25 to 315 bar STANDARD	
	SV	YLPSN64000	Relief valve blanking plug	

SPOOL OPTIONS	Code	Part #	Description	List Price
	1	YLWSN82001	Double acting, 3 positions, A+B closed in neutral position STANDARD	
	2	YLWSN82002	Double acting, 3 positions, A+B open to tank in neutral position STANDARD	
	3	YLWSN82003	Single acting on A closed in neutral position, 3 positions, B plugged	
	4	YLWSN82004	Single acting on B closed in neutral position, 3 positions, A plugged	

B-SIDE SPOOL POSITIONER	Code	Part #	Description	List Price
	6-1	YLWSN83061	Detent in position 1-0-2, without spring centered	
	6-3	YLWSN83063	2 positions, detent in position 1-0, without spring centered	
	8	YLWSN83008	Spring return to neutral position STANDARD	
	9-1	YLWSN83091	Detent in position 1, 2 with spring centered	
	9-2	YLWSN83092	Detent in position 2 with spring centered	
	8P	YLWSN83080	ON/OFF pneumatic actuator	
	8EP3A	YLWSN84300-12V	ON/OFF electro-pneumatic actuator 12v DC	
	8EP3B	YLWSN84300-24V	ON/OFF electro-pneumatic actuator 24v DC	
	8IM	YLWSN830810	Hydraulic pilot kit, 181mm, cylinder spool	
	8IM	YLWSN830811	Hydraulic pilot kit, 281mm, motor spool	

PORT RELIEF (optional)	Code	Part #	Description	List Price
	XU2	YLWSN85012	Anti-shock valve and anti-cavitation valve, range 63 to 125 bar	
	XU3	YLWSN85013	Anti-shock valve and anti-cavitation valve, range 100 to 250 bar	
	XU4	YLWSN85014	Anti-shock valve and anti-cavitation valve, range 200 to 315 bar	

A-SIDE	Code	Part #	Description	List Price
	L	YLWSN84000	Standard lever STANDARD	

OUTLET COVER	Code	Part #	Description	List Price
	M3	-	Open centre STANDARD	-
	M8	-	Closed centre (power beyond conversion plug)	-



1800-OILSOL
1800-645765

<https://oilsolutions.com.au/>

sales@oilsolutions.com.au

Cable Control

Part #	List Price \$	Description
RCC-3/1S/HL		Remote lever for cable control SN3
RCC-5/1S/HL		Remote lever for cable control SN4,6,8
FCR-2		Joystick for cable control, dual axis
YLWSN45003		Cable connector, spool to joystick cable SN3
YLWSN44003		Cable connector, spool to joystick cable SN4
YLWSN64003		Cable connector, spool to joystick cable SN6
YLWSN84003		Cable connector, spool to joystick cable SN8
YLMBCABLE1M		Cable 1 Metre
YLMBCABLE1.5M		Cable 1.5 Metre
YLMBCABLE2M		Cable 2 Metre
YLMBCABLE2.5M		Cable 2.5 Metre
YLMBCABLE3M		Cable 3 Metre

Hydraulic Pilot Controllers

Part #	List Price \$	Description	Axis	Flow	Inlet Pressure Range	A+B Outlet Pressure Range
JHP-1/1S-G2/8-A01B		Spring centre	Single	5-20 lpm	30-100 bar	5-19 bar
JHP-1/1S-G2/9-1-A01B		Spring centre friction detent in position 1+2	Single	5-20 lpm	30-100 bar	5-19 bar
JHP-1/1S-G2/FD-A01B		Friction detent	Single	5-20 lpm	30-100 bar	5-19 bar
JHP-1/1S-G2/LES-A01B		Safety lever detent in neutral	Single	5-20 lpm	30-100 bar	5-19 bar
JHP-2/01-G2/01-LCB-B02B		Spring centre	Dual	5-20 lpm	30-100 bar	6-25 bar

Note: all hydraulic pilot controllers are suitable for use with sectional, proportional and monoblock valves



FCR



RCC



JHP

Hydraulics Network



1800-OILSOL
1800-645765

<https://oilsolutions.com.au/>

sales@oilsolutions.com.au

MELBOURNE VICTORIA

- 📍 23 Quinlan Road, Epping, VIC 3076
- ✉️ sales@hydraulicsnetwork.com.au
- ☎️ 03 9399 8957

BRISBANE QUEENSLAND

- 📍 29 Annie Street, Coopers Plains, QLD 4108
- ✉️ salesqld@hydraulicsnetwork.com.au
- ☎️ 07 3277 5969

www.hydraulicsnetwork.com.au

AUSTRALIAN-OWNED
INDEPENDENT HYDRAULICS WHOLESALER