


VD8Z

Directional control Valve

Sectional control valve with integrated
electro-hydraulic control

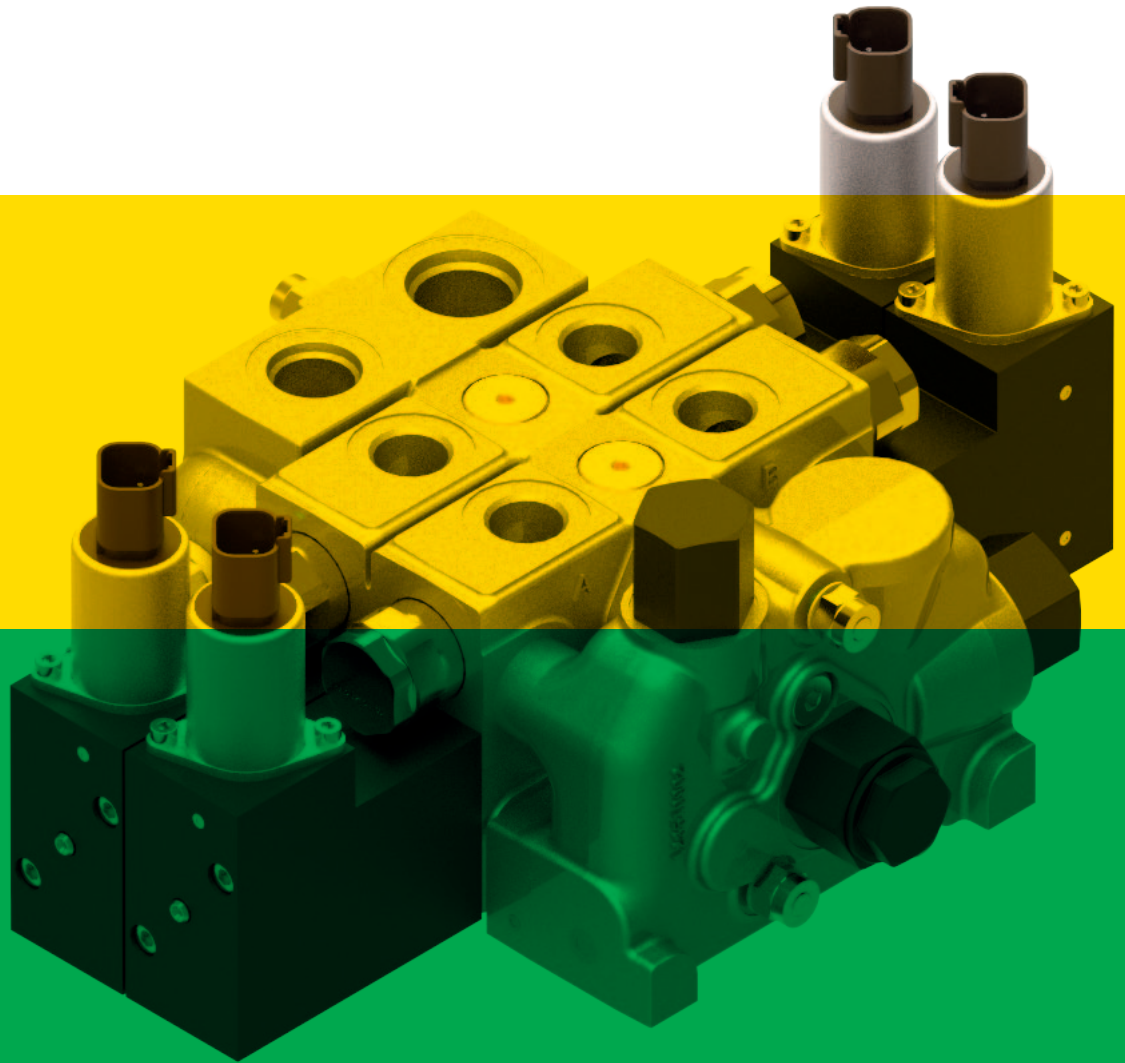

E0.235.1018.11.00IM00



1800-OILSOL
1800-645765

<https://oilsolutions.com.au/>

sales@oilsolutions.com.au

COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001:2015 =

salami 
FLUID POWER SYSTEMS



1800-OILSOL
1800-645765

<https://oilsolutions.com.au/>

sales@oilsolutions.com.au

Final revised edition - October 2018

The data in this catalogue refers to the standard product. The policy of Salami S.p.A. consists of a continuous improvement of its products. It reserves the right to change the specifications of the different products whenever necessary and without giving prior information.

If any doubts, please contact our sales department.

General Index

General Features	4
Applications	4
Technical Data	5
Types of Ports and Threads.....	5
Valves	5
Electro-Hydraulic Controls	5
Dimensions	6
Inlet Module	7
Outlet Module	7
Working Sections	8
Electrical Data.....	8
Working Sections Dimensions	9
Configuration With VD8A.....	10
Hydraulic Circuit - VD8Z/VD8A.....	11
How to Order	11

VD8Z

Sectional type



General Features

- Cast iron sectional and biblock construction.
- Steel spools, hardened and nickel plated.
- Electro-Hydraulic open loop on-off and proportional control (12 or 24 Vdc).
- Parallel circuit with load check valve on each section.
- Several type of spools: double and single acting, motor spool, regenerative position, etc.
- Emergency command button.
- Hand lever.
- Power beyond (HPCO) configuration.
- Availability of auxiliary valves either on port A or B or on both.
- Spool position sensor.
- Compact dimensions.
- No need of external pilot lines.
- Assemblable with VD8A standard sections.

Applications

- Agriculture
- Municipal public works
- Construction
- Material handling



E0.235.1018.11.00IM00



VD8Z

Sectional type

Technical Data

SPOOLS	From 1 To 8	
MAX FLOW	Q	90 l/min - (24 gpm US)
MAX PRESSURE	port P	350 bar - (5070 psi)
	ports A/B	350 bar - (5070 psi)
	port T	25 bar - (363 psi)
SPOOL STROKE (POSITIONS 1 AND 2)	± 7 mm - (0.28 in.)	
CIRCUIT	Parallel	

● = Standard
○ = Option

Types of Ports and Threads

		Inlet Section				Working Section	Outlet Section					
		P	PL	T	TL	A/B	T	TL	TL1	P3	Pp	TP
BSP (UNI ISO 1179 - THREADS UNI ISO 228/1)	G1/4										●	●
	G1/2	●	●			●				●		
	G3/4	○		●	●	○	●	●	●			
BSPF - JIS B 2351-1 (UNI EN ISO 8434-1)	G1/4										●	●
	G1/2	●	●			●				●		
	G3/4			●	●		●	●	●			
SAE UN-UNF (UNI ISO 11926 - THREADS UNI ISO 725)	SAE4 (7/16-20 UNF)										●	●
	SAE8 (3/4-16 UNF)					○						
	SAE10 (7/8-14 UNF)	●	●			●				●		
	SAE12 (1-1/16-12 UN)			●	●		●	●	●			

Valves

INLET VALVES		AUXILIARY VALVES	
DIRECT	VS	OVERLOAD	VA
PILOT	P	OVERLOAD AND ANTICAVITATION	AR
UNLOAD	VU	ANTICAVITATION	VR
► For auxiliary valves see Technical Catalogue VD8A (E0.06.0911.02.02) Page_26/27		CONVERSION	CV

Electro-Hydraulic Controls

	ON-OFF		PROPORTIONAL	
SPOOL COMMAND	no lever	with lever	no lever	with lever
	SHF	LHF	SKF	LKF
SPOOL POSITIONINGS	Positioning with spring return			
	HF		KF	
	Positioning with spring return and spool position sensor			
	PHF		PKF	

E0.235.1018.11.001M00

DIRECTIONAL CONTROL VALVE



VD8Z

Sectional type




Dimensions

SECTIONS		1	2	3	4	5	6	7	8
I	mm	127.5	167.5	207.5	247.5	287.5	327.5	367.5	407.5
	in	5.02	6.59	8.17	9.74	11.32	12.89	14.47	16.04
L	mm	177.9	217.9	257.9	297.9	337.9	377.9	417.9	457.9
	in	7	8.58	10.15	11.73	13.3	14.88	16.45	18.03

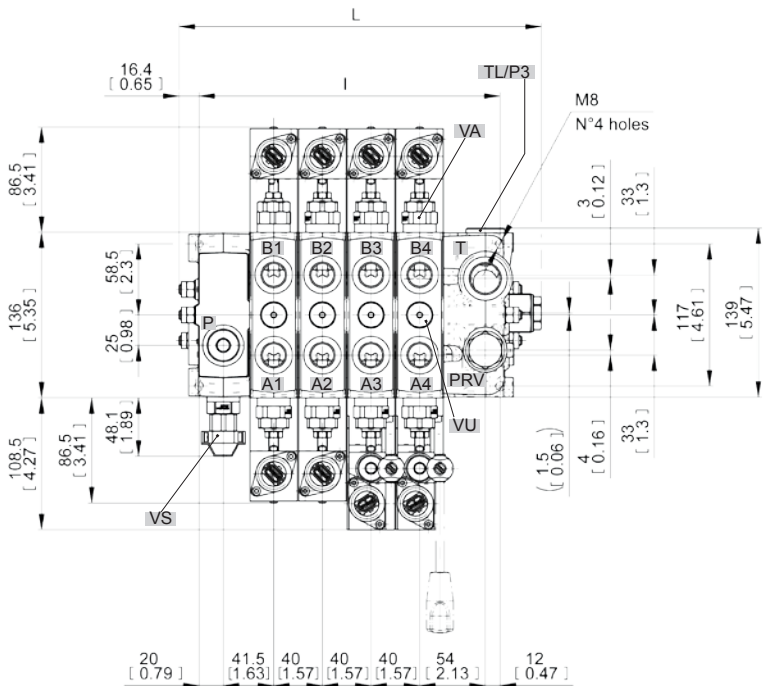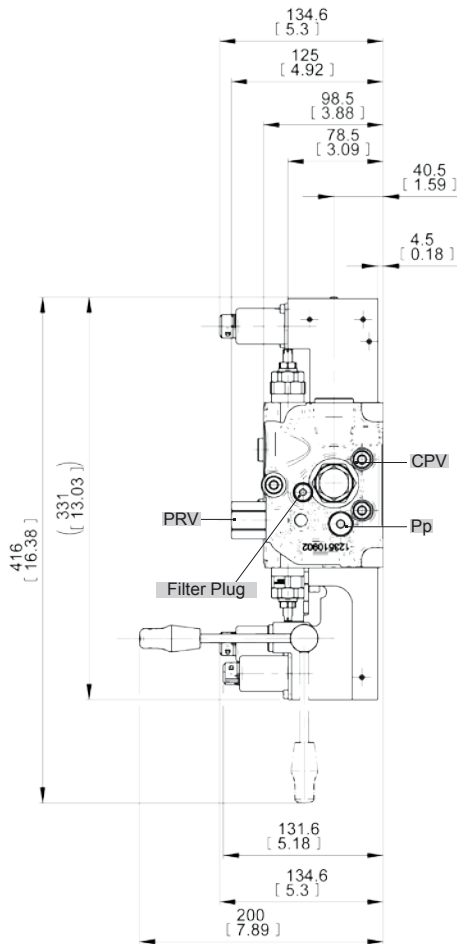

Hydraulic Circuit

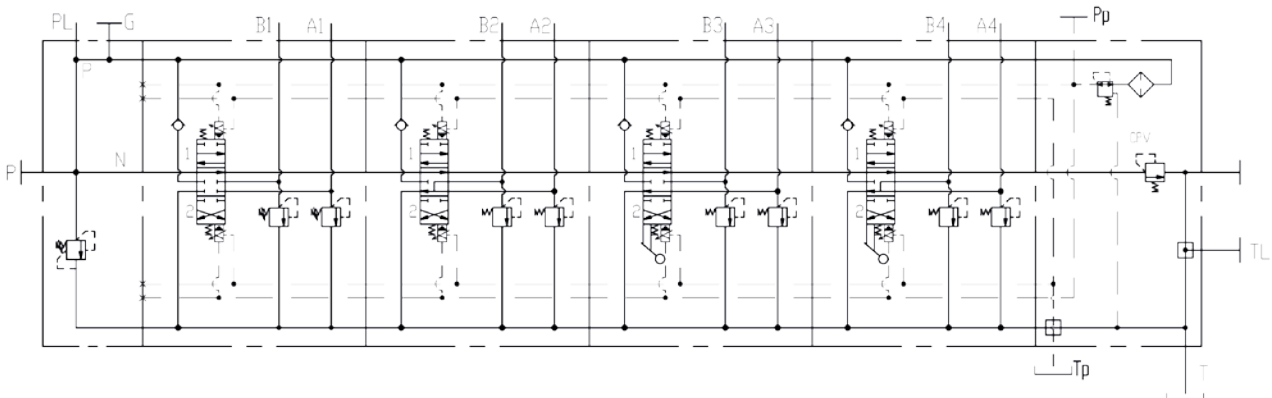



E0.235.1018.11.00IM00



VD8Z


Sectional type

Inlet Module

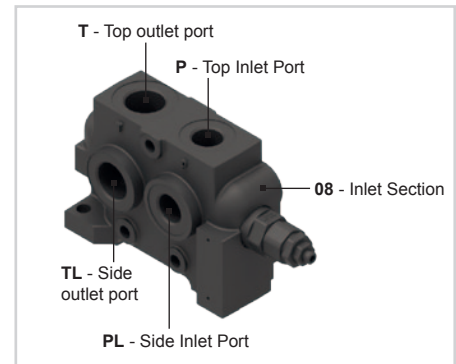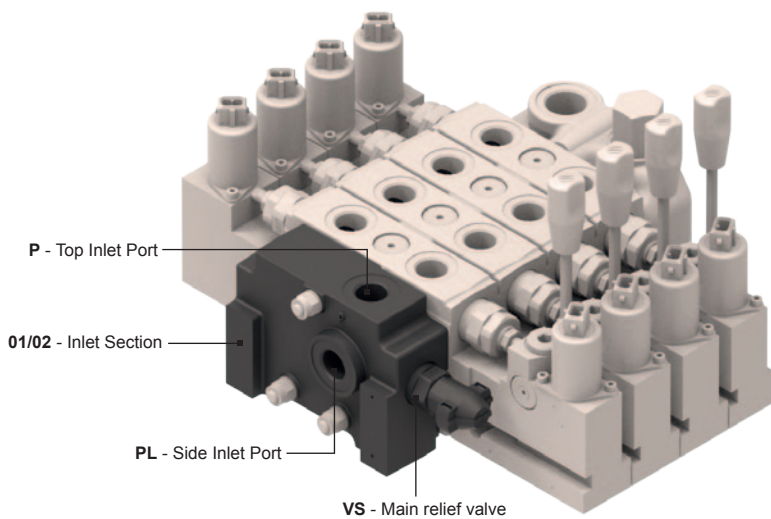


Example:

Code 01:
Side Inlet port
plugged.




Code 02:
Top Inlet port
plugged.

Code 08:
Top inlet and
Top outlet ports
plugged.



► For Inlet sections see
Technical Catalogue **VD8A**
(E0.06.0911.02.02) Page_10

Outlet Module

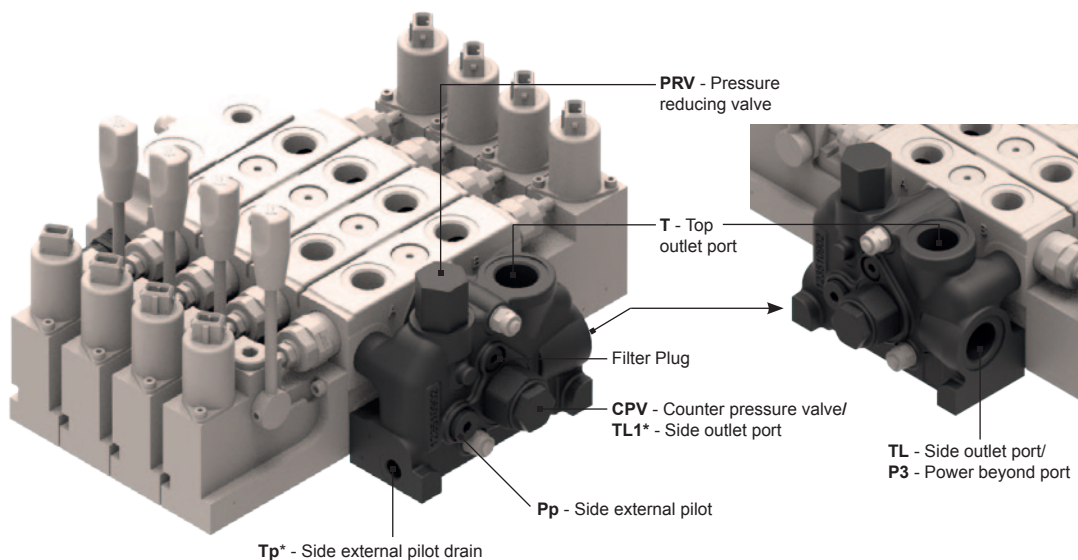


TL1*= Port available
instead of CPV valve,
ensure at least 10 bars
on T line to guarantee
the Electro-Hydraulic
modules function.


Tp*= Plug for internal
pilot drain line. Ensure
max 5 bar on T line to
guarantee the hydraulic
command function.

Example:


Code U19:
Side Outlet
port and Side
External Pilot
plugged.




Code U31:
Power
beyond
configuration
and Side
External Pilot
plugged.



Code U26:
Outlet ports
plugged and
Side External
Pilot plugged.
Inlet with
outlet port.



Code U32:
Power
beyond and
Outlet ports
plugged.
Inlet with
outlet port.




E0.235.1018.11.00IM00

VD8Z



Sectional type



Working Sections

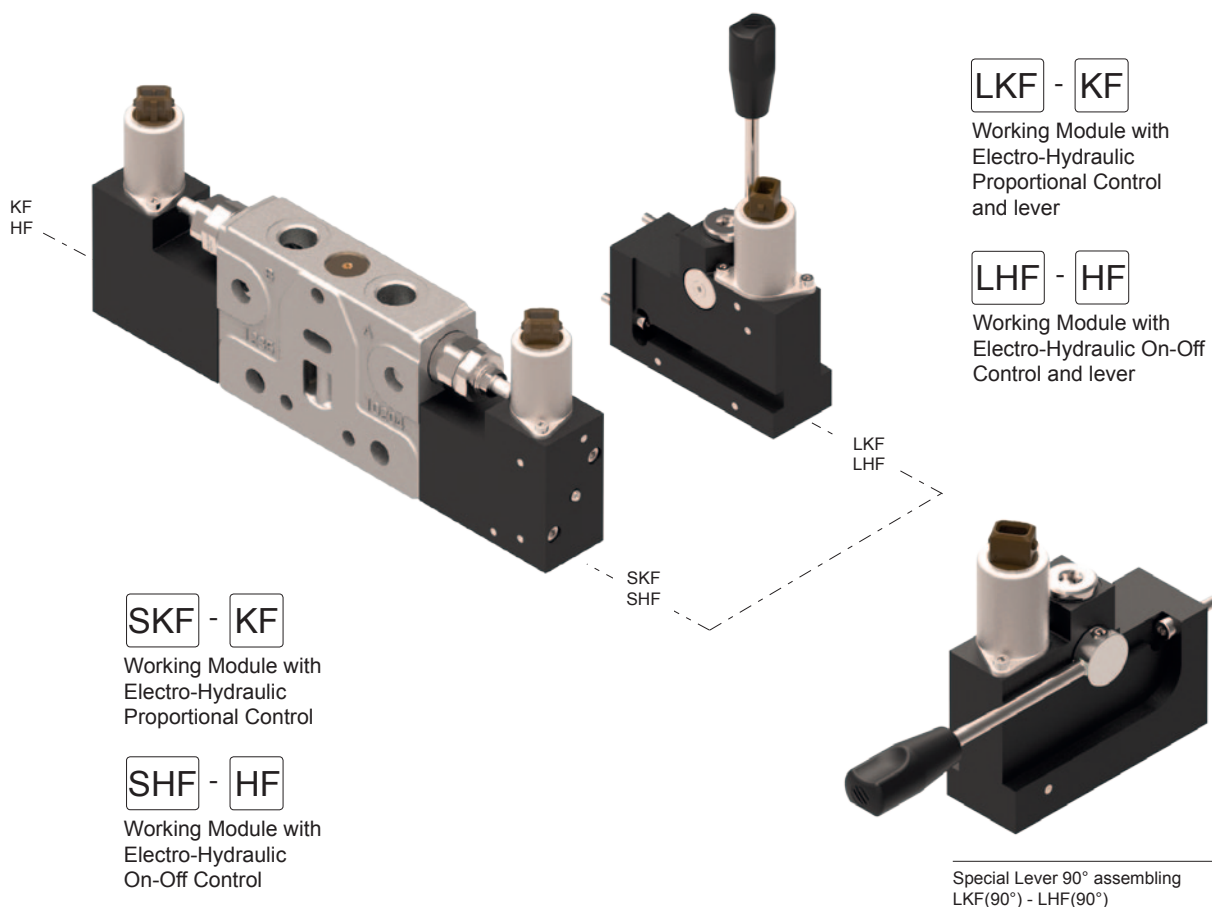

Hydraulic Circuit

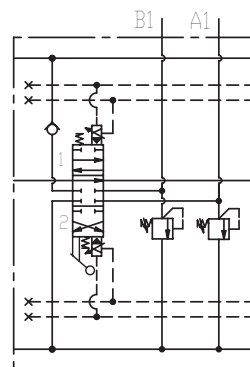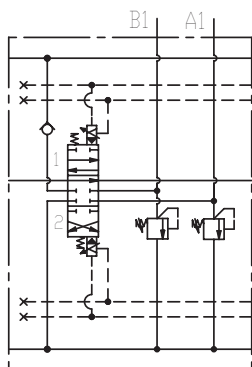

Electrical Data

VOLTAGE	12V	24V	TYPE OF CONTROL	On/Off	Direct Current 12 and 24 V
CURRENT	1500 mA	750 mA		Proportional	PWM or super imposed frequency dither 100 Hz recommended
RESISTANCE	4.72 $\Omega \pm 5\%$	20.8 $\Omega \pm 5\%$	CONNECTOR	AMP Junior Timer Deutsch Connector DT04-2P Flying Leads	

E0.235.1018.11.00IM00




VD8Z

Sectional type

Working Sections Dimensions


SHF - HF | SKF - KF

Working Module with Electro-Hydraulic Control

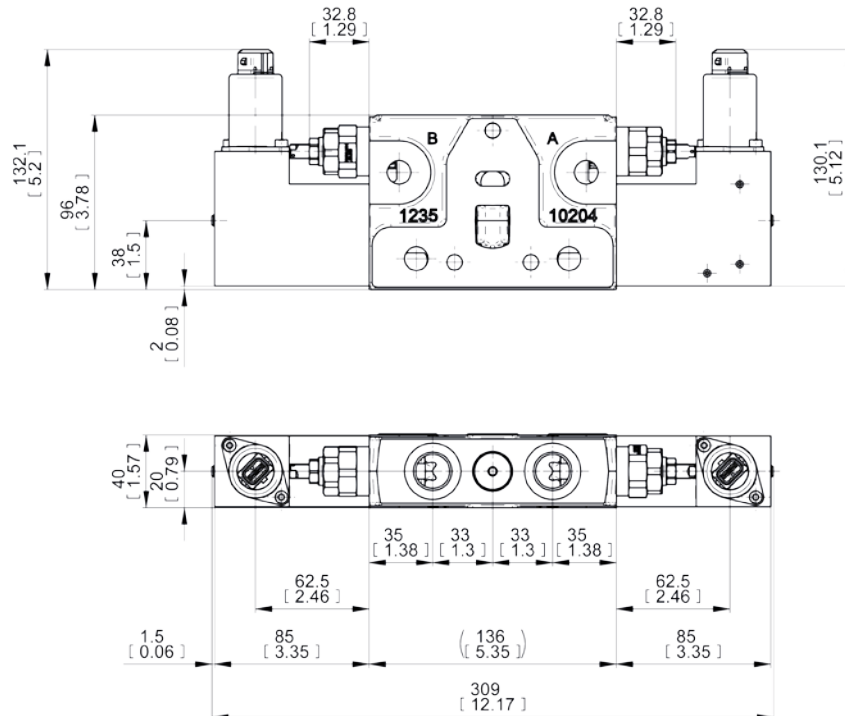

LHF - HF | LKF - KF

Working Module with Electro-Hydraulic Control and lever

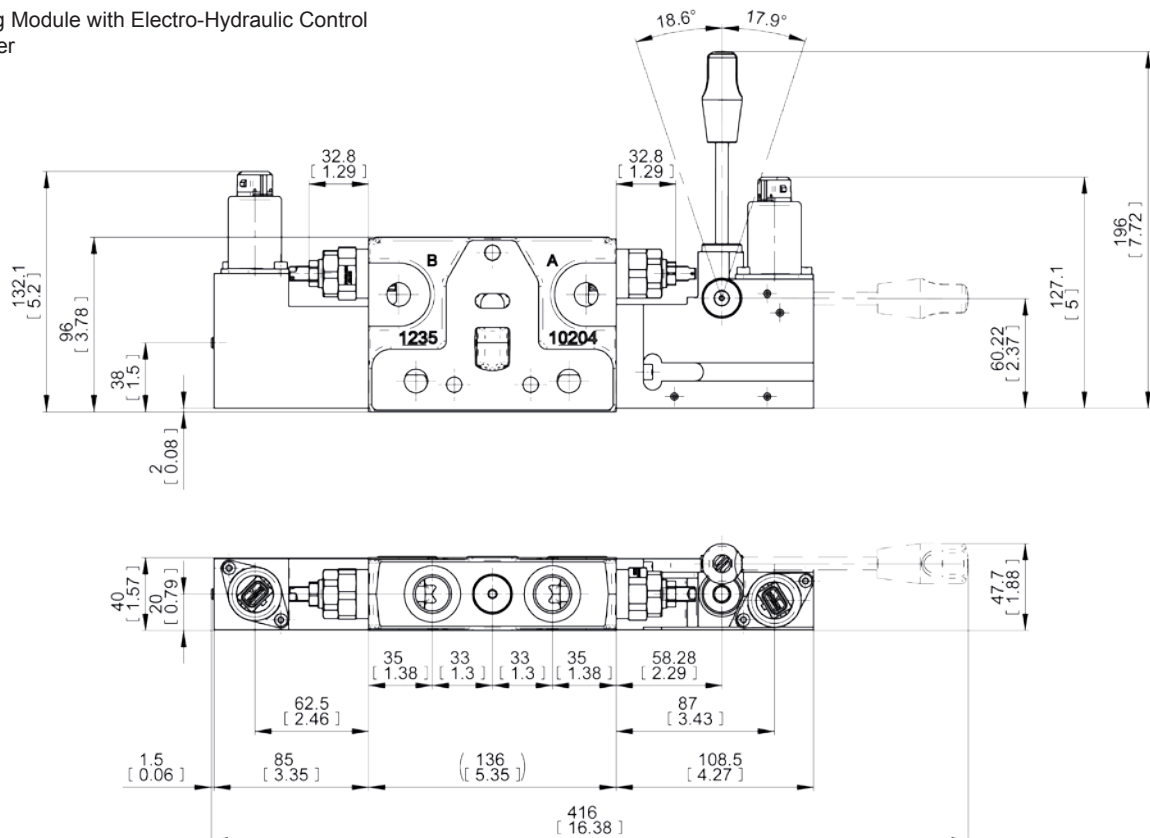


EO.235.1018.11.001M00



VD8Z

Sectional type

Hydraulic Circuit - VD8Z/VD8A

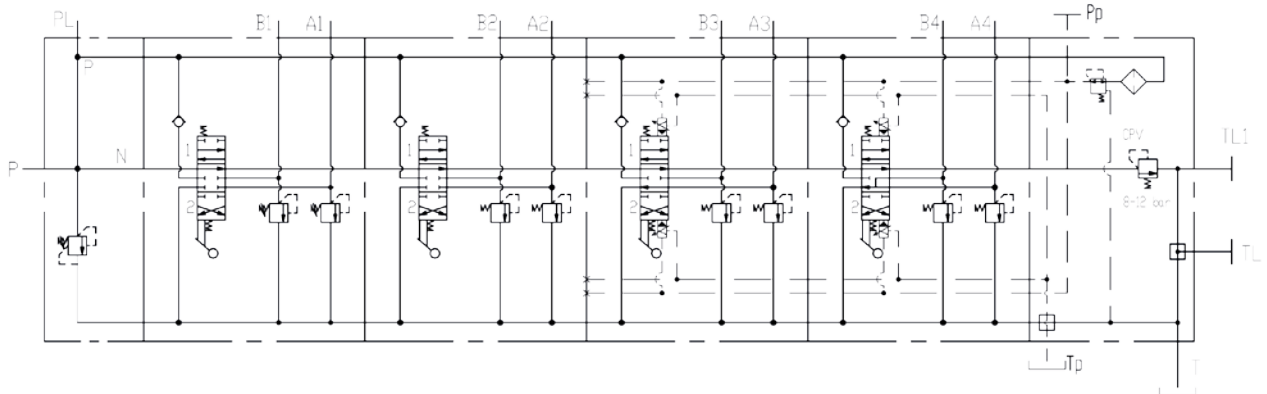

► See Technical Catalogue **VD8A** (E0.06.0911.02.02)

How to Order

VD8Z	01	D	180	/	2	X	P	01	C	-	VA	250	A	.	VA	250	B	-	LKF	1	A	-	KF	1	/	U19	G
	A	B	C		D		E	F	G		H		I		H		I		L	M	N		O	M		P	Q

A	INLET PLATE (page 7) ►
01 - 02 - 08	

B	MAIN RELIEF VALVE (page 5) ►
D	Direct main relief valve
P	Piloted main relief valve
W	Without main relief valve

C	MAIN RELIEF SETTING ►
From 25 to 350 bar (363 to 5070 psi)	

D	NUMBER OF IDENTICAL CONSECUTIVE SECTIONS
---	--

E	WORKING SECTIONS (page 5) ►
P	Parallel circuit

F	SPOOL TYPES
01C	Double acting spool for hydraulic control
02C	Double acting motor spool for hydraulic control
03C	Double acting motor spool ("B" port blocked) for hydraulic control
04C	Double acting motor spool ("A" port blocked) for hydraulic control
05C	Single acting spool "A" working port for hydraulic control
06C	Single acting spool "B" working port for hydraulic control

G	SPOOL FLOW
C	Standard

H	AUXILIARY VALVES (page 5) ►
VA	Overload valve
AR	Overload and Anticavitation valve
VR	Anticavitation valve
CV	Conversion valve

Q	PORTS (page 5) ►
G	GAS - BSP Threaded (ISO 228)
S	SAE UN - UNF Threaded (ISO 725)
J	GAS - BSPF O-RING BOSS Threaded (JIS B 2351)

P	OUTLET COVER (page 7)
U19 - U26 - U31 - U32	

O	SPOOL POSITIONINGS (page 5)
HF	Electro-hydraulic On/Off positioning with spring return
KF	Electro-hydraulic Proportional positioning with spring return
PHF	Electro-hydraulic On/Off positioning with spring return and spool position sensor
PKF	Electro-hydraulic Proportional positioning with spring return and spool position sensor

N	CONTROL SIDE
A	A port side
B	B port side

M	VOLTAGE ELECTRO-HYDRAULIC MODULES (page 8)
1	12V
2	24V

L	SPOOLS CONTROLS (page 5)
SHF	Electro-hydraulic On/Off
SKF	Electro-hydraulic Proportional
LHF	Electro-hydraulic On/Off with lever
LKF	Electro-hydraulic Proportional with lever

I	PORT ON WHICH THE VALVE IS MOUNTED
---	------------------------------------

E0.235.1018.11.001M00

SALAMI S.P.A.

Via Emilia Ovest 1006
41121 Modena (Italy)
T. +39 059 387 411
F. +39 059 387 639
sales@salami.it

SALAMI FRANCE

22, rue Louis Saillant
69120 Valux en Velin
Lyon
T. +33-04-78809941
F. +33-04-78803669
e.pasian@salami.fr

SALAMI ESPAÑA

Poligono Industrial Armenteres
C/Primer de Maig, 18, Nave 4
08980 San Feliu de Llobregat
Barcelona
T. +34-93-6665451
F. +34-93-6667826
info@salamispain.com

SALAMI HYDRAULICS N.A INC

4630 Crossroads Park Drive
Liverpool
NY 13088 - USA
T. +1-315-295-2363
F. +1-315-295-2364
info@salamihydraulics.com



OIL SOLUTIONS

1800-OILSOL
1800-645765

<https://oilsolutions.com.au/>

sales@oilsolutions.com.au